



A full-page photograph of a sunset over a vast, flat landscape. The sky is filled with dramatic, dark clouds, with a bright orange and yellow glow from the setting sun on the left side. The foreground shows a dirt road or path leading into the distance, flanked by tall, dry grasses. The overall color palette is dominated by warm, golden, and dark orange tones.

WE FOLLOW THE SUN

I N D E X

SPOT LUMINAIRES

SEMI RECESSED MOUNTED LUMINAIRES

SURFACE MOUNTED PENDANT LIGHT LUMINAIRES

TRACK SPOT LUMINAIRES



• **DOWNLED**
Recessed Mounted



• **BELLA**
Surface Mounted



• **S-NAIL**
Recessed Mounted



• **ORION**
Surface Mounted



• **VENO V.2**
Semi-Recessed Mounted



• **ATLANTIS**
Maxi / Midi
Pendant



• **GIZA Track Spot**
Three-phase Rail / Mono-Phase Rail



• **DOWNLED**
IP20/IP65
Surface Mounted



• **ORI MICRO**
Recessed Mounted



• **KRIZA V.2**
Recessed Mounted



• **SATURN V.4**
Surface Mounted



• **BRICK**
Semi-Recessed Mounted



• **ATLANTIS Mini**
Pendant



• **GIZA L4 Track Spot**
Horizontal / Vertical
Three-phase Rail / Mono-Phase Rail



• **DOWNLED**
IP20/IP65
Recessed Mounted



• **ORI Small / Dark**
/ Dark IP65
Recessed Mounted



• **KRIZA Mini**
Recessed Mounted



• **LEDBAR**
SLIM-60 / SLIM-120
Cove Lighting



• **GIZA**
Semi-Recessed Mounted



• **VENO**
Pendant



• **STORM Track Spot**
Three-phase Rail / Dali Rail



• **DOWNLED IP20**
Recessed Mounted



• **ORI Mini**
YV / KR
Recessed Mounted



• **PLANO 1X / 2X**
Recessed Mounted



• **FLEXBAR V.2**
Cove Lighting



• **GIZA Slim**
Semi-Recessed Mounted



• **LILI**
Pendant



• **GIZA Slim Track Spot**
Three-phase Rail / Dali Rail



• **GIZA IP20/IP65**
Recessed Mounted



• **ORI**
Recessed Mounted



• **SQUARE**
Recessed Mounted



• **STORM Adjustable**
Semi-Recessed Mounted



• **LUP YV / KR**
Pendant



• **OCTO V.2 Track Spot**
Three-phase Rail / Mono-Phase Rail
/ Dali Rail



• **GIZA IP20/IP65**
Surface Mounted



• **LUP IP20**
YV / KR
Recessed Mounted



• **ROUND**
Recessed Mounted



• **GIZA L4 Adjustable**
Vertical / Horizontal
Semi-Recessed Mounted



• **STL Frame**
Rectangle
Pendant



• **PICA V.2 Track Spot**
Three-phase Rail / Mono-Phase Rail
/ Dali Rail



• **GIZA Slim**
Adjustable
Surface Mounted



• **BISTA Mini**
IP20 - YV / KR
Recessed Mounted



• **BISTA YV / KR**
V.2 Adjustable



• **LUP**
Semi-Recessed Mounted



• **STL FRAME**
Square
Pendant



• **TACO Track Spot**
Mini / Midi / Maxi
Three-phase Rail / Mono-Phase Rail / Dali Rail



• **GIZA L4**
Recessed Mounted



• **PIXA**
YV / KR
Recessed Mounted



• **BISTA V.2 SBT**
YV / KR
Recessed Mounted



• **ART Adjustable**
Semi-Recessed Mounted



• **RINOVA**
Pendant



• **OXI Track Spot**
Three-phase Rail / Mono-Phase Rail
/ Dali Rail



• **GIZA L4 Adjustable**
Horizontal / Vertical
Surface Mounted



• **BLADE**
Recessed Mounted



• **S-NAIL**
Recessed Mounted



• **ART**
Semi-Recessed Mounted



• **NETA**
Pendant



• **ART Track Spot**
Three-phase Rail / Dali Rail



• **STORM**
Adjustable
Surface Mounted



• **SERA**
Adjustable



• **VENO IP65 / IP20**
Surface Mounted



• **NETA**
Recessed Mounted



• **ESP-BRICK**
Surface Mounted



• **LORY FLAT**
IP20 / IP65 KR / YV
Recessed Mounted



• **LUP KR / YV**
Surface Mounted



• **BRICK V.2**
Surface Mounted



• **LORY**
IP20/IP65



• **ART Adjustable**
Surface Mounted



• **BELLA**
Recessed Mounted



• **DELTA IP20/IP65**
YV / KR
Recessed Mounted



• **ART**
Surface Mounted

CELL CEILING LUMINAIRES



• LORY Mesh



• GIZA Mesh



• MIDDY Mesh



• ORI Small Mesh



• LUP KR Mesh

WALL MOUNTED LUMINAIRES



• VENO Wall Mounted Surface Mounted



• VENO Double Side Wall Mounted Surface Mounted



• APLIKED Wall Mounted Double Side / Single Side Surface Mounted



• ART Wall Mounted Surface Mounted



• GIZA Asymmetric Wall Mounted Surface Mounted



• GIZA IP65 / IP20 Wall Mounted Surface Mounted

OFFICE LUMINAIRES



• BLOOM Recessed Mounted



• BLOOM-S NG Recessed Mounted



• BLOOM IP65 Recessed Mounted



• BLOOM ELP Recessed Mounted



• BLOOM Steril IP65 / IP40 Recessed Mounted

LINEAR TRUNKING LUMINAIRES



• STL Surface Mounted / Pendant



• STL Direct / Indirect Pendant



• STL Recessed Mounted



• TORNADO Waterproof Surface Mounted



• LINA NG Surface Mounted

LANDSCAPING LUMINAIRES



• CAPELLO Bollard Ground Mounted



• CAPELLO Pole Ground Mounted



• TOWER Bollard Ground Mounted



• TOWER Pole Ground Mounted



• CARMELO Bollard Ground Mounted



• CARMELO Bollard Ground Mounted



• CITY Bollard Ground Mounted



• CITY L Pole Ground Mounted



• CITY S Wall Mounted Wall Light



• CITY L Wall Mounted Wall Light



• CITY T Pole Ground Mounted



• CITY F Pole Ground Mounted



• BRIDGE Bollard Ground Mounted



• BRIDGE Pole Ground Mounted



• CITY NG Bollard Ground Mounted



• TOWER NG Bollard Ground Mounted



• HORUS-1 Pole



• HORUS-2 Pole



• OSIRIS Pole



• ALBA Pole




• VALERIA Highway / Pole / Ground



• D-BAR Cove Lighting



• PB2 PB Ground Mounted



• CENTRO Recessed Mounted



• MARINE AC / DC Surface Mounted

EMERGENCY LIGHTING LUMINAIRES



• MINOLITE Pendant / Recessed Mounted



• ELOTTI Maxi Surface Mounted / Pendant



• ELOTTI Slim Surface Mounted



• TOSECA Surface Mounted / Pendant / Recessed Mounted



• PLEK Single Side Mini / Midi / Maxi Surface Mounted / Pendant



• PLEK Double Side Mini / Midi / Maxi Surface Mounted / Pendant



• WALD V.2 YV Recessed Mounted



• WALD Recessed Mounted



• RIGNA Recessed Mounted



• STOLE YV Surface Mounted



• ARIOSTE Emergency Lighting Surface Mounted




• PONDA Emergency Lighting Surface Mounted




• EXIT ROBITO NG Surface Mounted / Pendant / Recessed Mounted



• EXIT ROBITO Surface Mounted / Pendant / Recessed Mounted

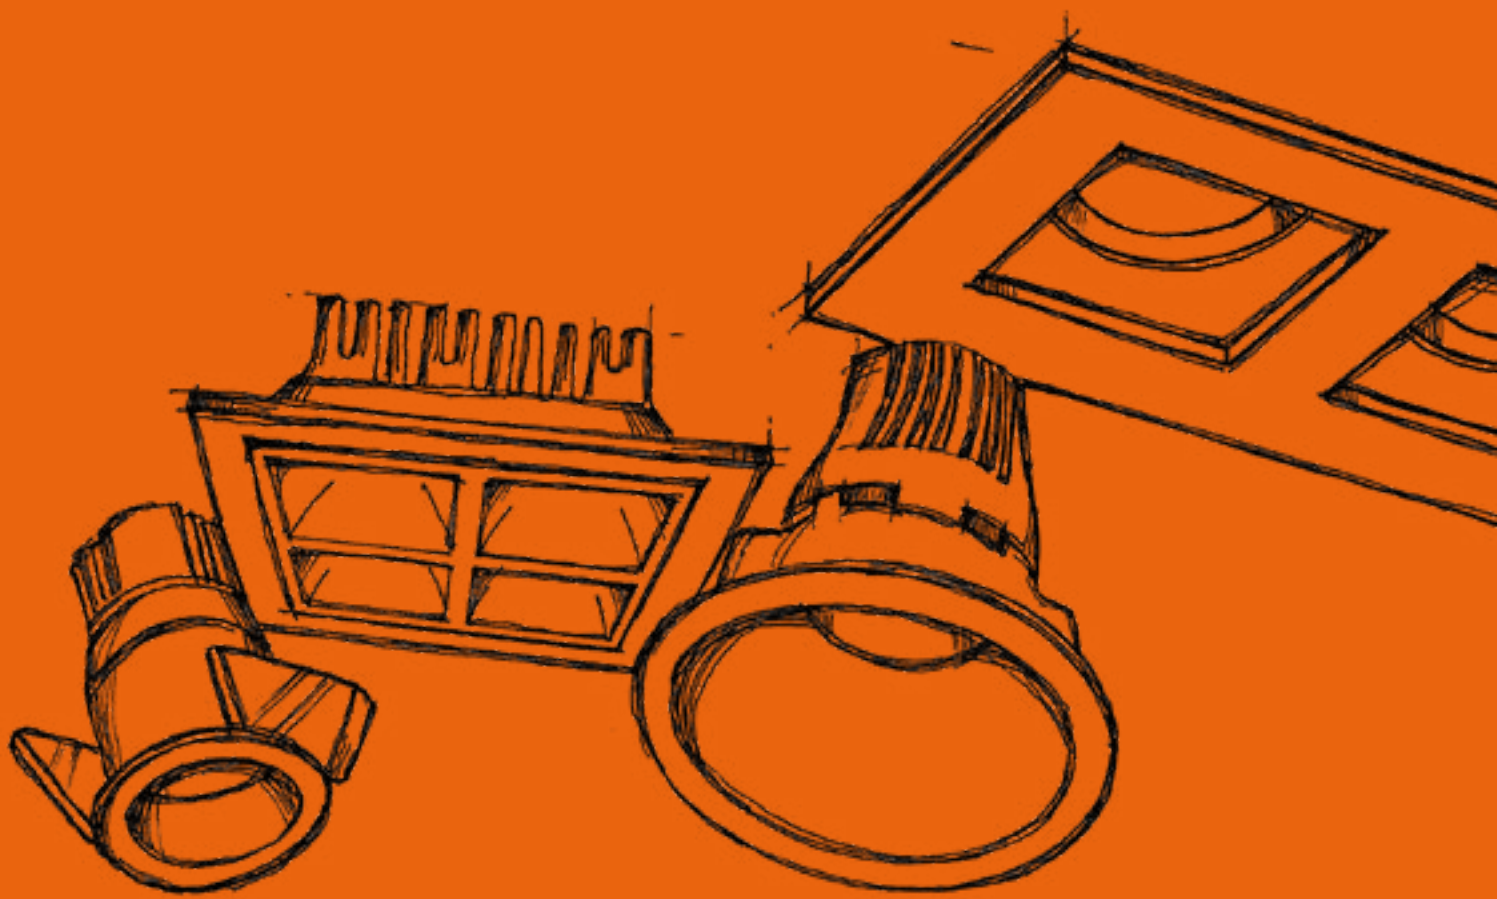

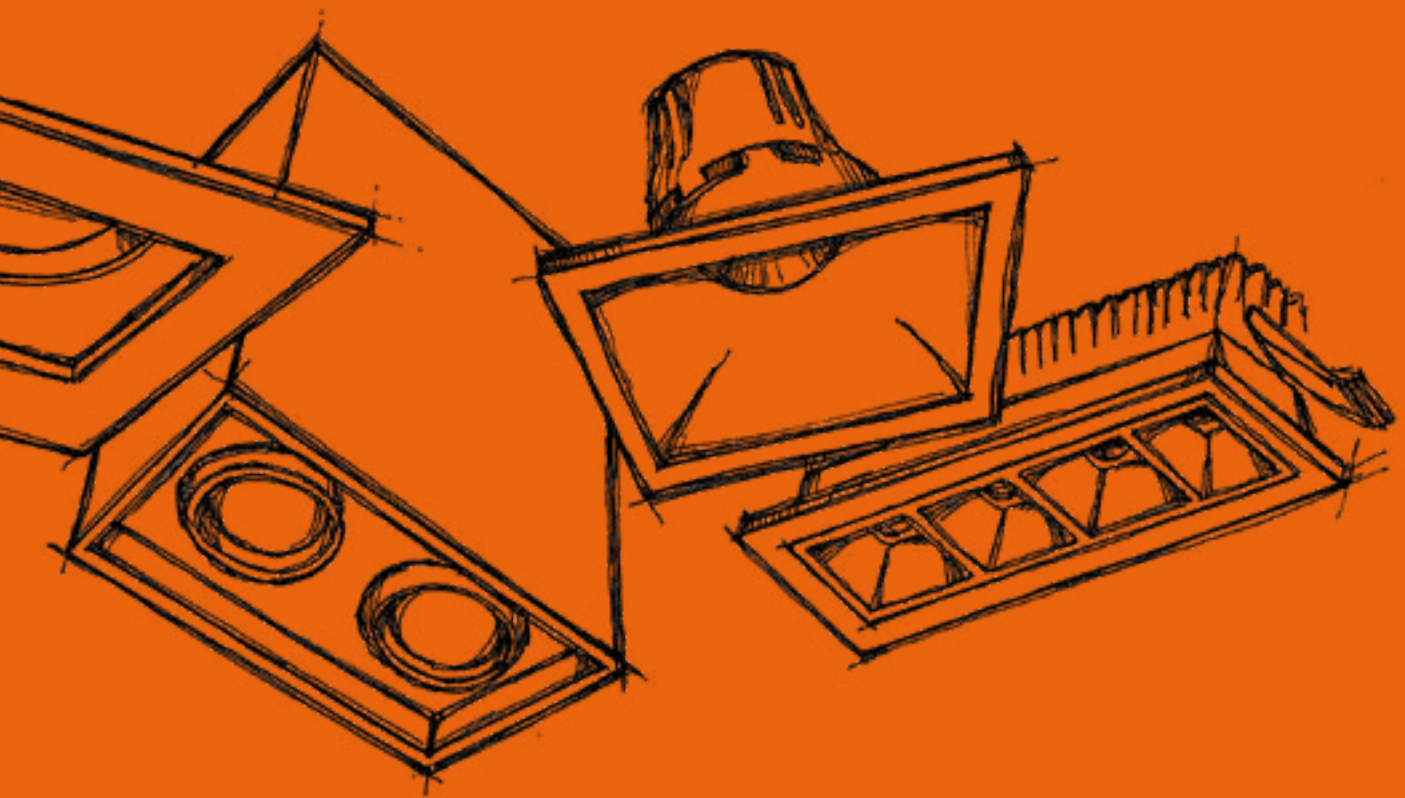

SPOT LUMINAIRES



SPOT LIGHTING LUMINAIRES




DOWNLED V.2 recessed mounted can be used in multi-purpose projects thanks to its simple design with clean finishes and opal diffuser that provides eye comfort. With a height of 3.5 cm, the luminaire provides ease of use in ceilings with little depth. Economical and energy efficient DOWNLED V.2 recessed mounted is ideal for all projects.




Technical Specifications

| | |
|--------------------|---|
| Housing | : Aluminium Injection Housing |
| Optic | : Opal Diffuser |
| Light Source | : SMD LED |
| Power Consumption | |
| Ø 115 | : 8W / 10W |
| Ø 175 | : 14W / 20W |
| Ø 225 | : 20W / 30W |
| Lumen | |
| Ø 115 | : 904lm / 1130lm |
| Ø 175 | : 1710lm / 2231lm |
| Ø 225 | : 2231lm / 3423lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : >80 |
| IP | : IP40 |
| Electronic Control | : On/Off (IP20 Driver) - DALI (IP20 Driver) |
| Mounting Type | : Recessed Mounted |
| Housing Colour | : RAL 9016 |

Technical Drawing

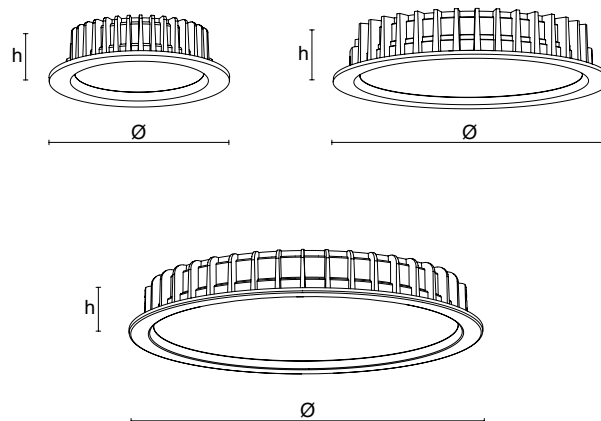

Photometric Data



Dimensions (mm)


| Ø115 | | | Ø175 | | | Ø225 | | |
|-------|-----|----|-------|-----|----|-------|-----|----|
| Power | Ø | h | Power | Ø | h | Power | Ø | h |
| 8 W | 115 | 35 | 14 W | 175 | 35 | 20 W | 225 | 35 |
| 10 W | 115 | 35 | 20 W | 175 | 35 | 30 W | 225 | 35 |

Ceiling Cut-Out Dimensions

| Ø | h |
|------|-----|
| Ø115 | 100 |
| Ø175 | 165 |
| Ø225 | 210 |

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |

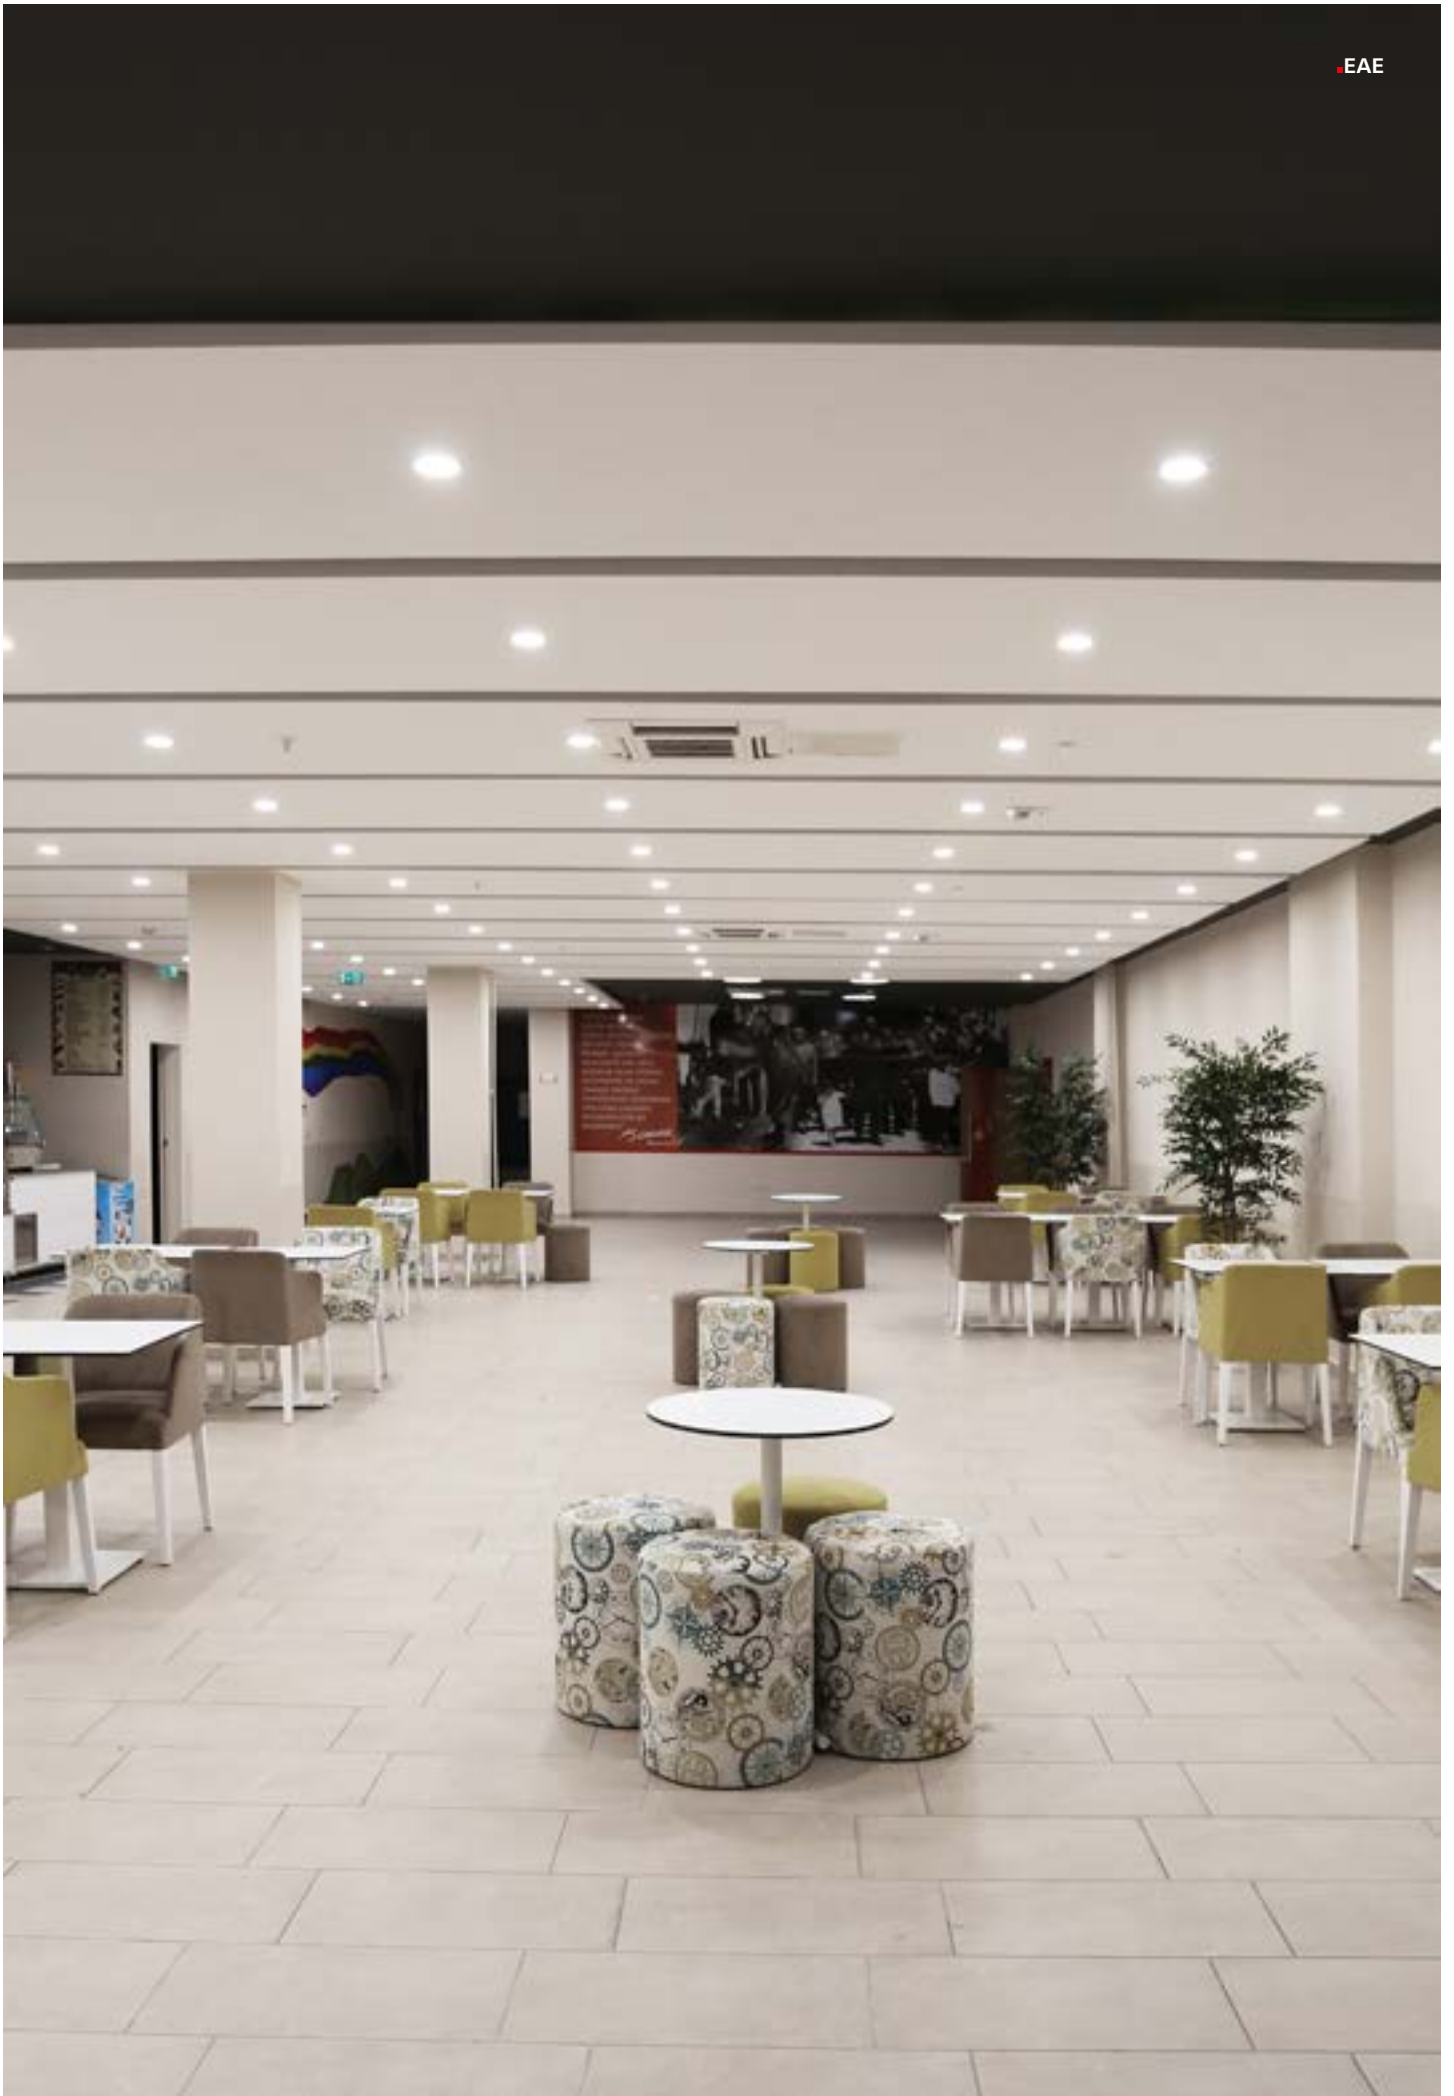

DOWNLED IP20 / IP65 Surface Mounted



SPOT LIGHTING LUMINAIRES




DOWNLED surface-mounted with powerful performance is suitable for environments where high IP value is required. The product, which has IP65 and IP20 protection classes, can be easily used indoors and outdoors as it is resistant to dust and water sprays. Thanks to its high luminous efficiency, it provides energy saving and homogeneous lighting. It does not cause glare thanks to its deeply positioned light source. It has a symmetrical spot effect in terms of light character and creates the effect of light filtering from the ceiling into the space.

Technical Specifications


| | |
|--------------------|---------------------------------|
| Housing | : Aluminium Housing |
| Optic | : Recessed Opal Diffuser |
| Light Source | : SMD LED |
| Power Consumption: | 17W / 20W |
| Lumen | : 1441 lm / 1696 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : >80 |
| IP | : IP20 / IP65 |
| Mounting Type | : Surface Mounted |
| Housing Colour | : RAL 9016 |

Technical Drawing


Ø160



Ø187



Photometric Data



Dimensions (mm)

IP20 / IP65

| | Ø | h |
|------|-----|-----|
| 17 W | 160 | 150 |
| 20 W | 187 | 180 |

Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |





DOWNLED IP20 / IP65 Recessed Mounted



SPOT LIGHTING LUMINAIRES




“DOWNLED IP65 meets the IP value required for damp spaces and is suitable for outdoor and under eaves areas. No glare thanks to its deeply positioned light source and opal diffuser.”


Technical Specifications

| | |
|--------------------|---------------------------------|
| Housing | : Aluminium Housing |
| Optic | : Recessed Opal Diffuser |
| Light Source | : SMD LED |
| Power Consumption: | 17 W / 20 W |
| Lumen | : 1441 lm / 1696 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : >80 |
| IP | : IP65 / IP65/20 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9016 |

Technical Drawing

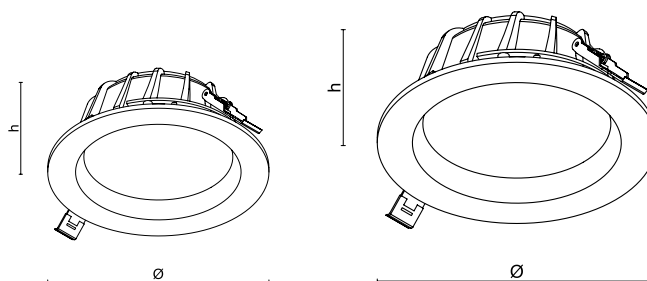

Photometric Data



Dimensions (mm)

IP65 / IP65 - IP20

| | Ø | h |
|------|-----|----|
| 17 W | 147 | 82 |
| 20 W | 177 | 85 |


Ceiling Cut-Out Dimensions

| | Ø |
|------|-----|
| Ø147 | 128 |
| Ø177 | 152 |


Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |

IP65

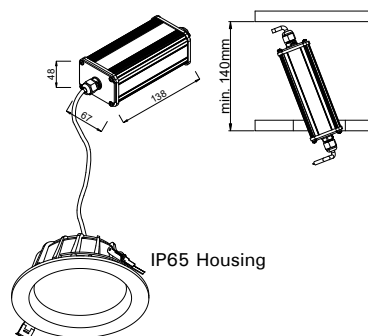

IP65 - IP20



DOWNLED IP20 Recessed Mounted



SPOT LIGHTING LUMINAIRES






DOWNLED ELP is designed to stand out in all projects that require innovation and economy. Developed with the advantages of innovative LED technology, DOWNLED can be easily integrated into various projects thanks to its three different body designs. With its minimalist design and recessed mounting feature, it can be easily placed in narrow ceiling spaces. Thanks to its opal diffuser, it maximizes eye comfort by providing homogeneous light distribution.


Technical Specifications

| | |
|-------------------|-------------------------------|
| Housing | : Aluminium Injection Housing |
| Optic | : Opal Diffuser |
| Light Source | : Mid Power LED |
| Power Consumption | : 10W / 20W/ 30W |
| Lumen | : 1242 lm / 2068 lm/ 3367 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9003 / RAL 9016 |

Technical Drawing



Photometric Data




Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |

Dimensions (mm)

| | ∅ | h | ∅D |
|-----|-----|----|-----|
| 10W | 138 | 32 | 115 |
| 20W | 178 | 36 | 155 |
| 30W | 188 | 36 | 160 |



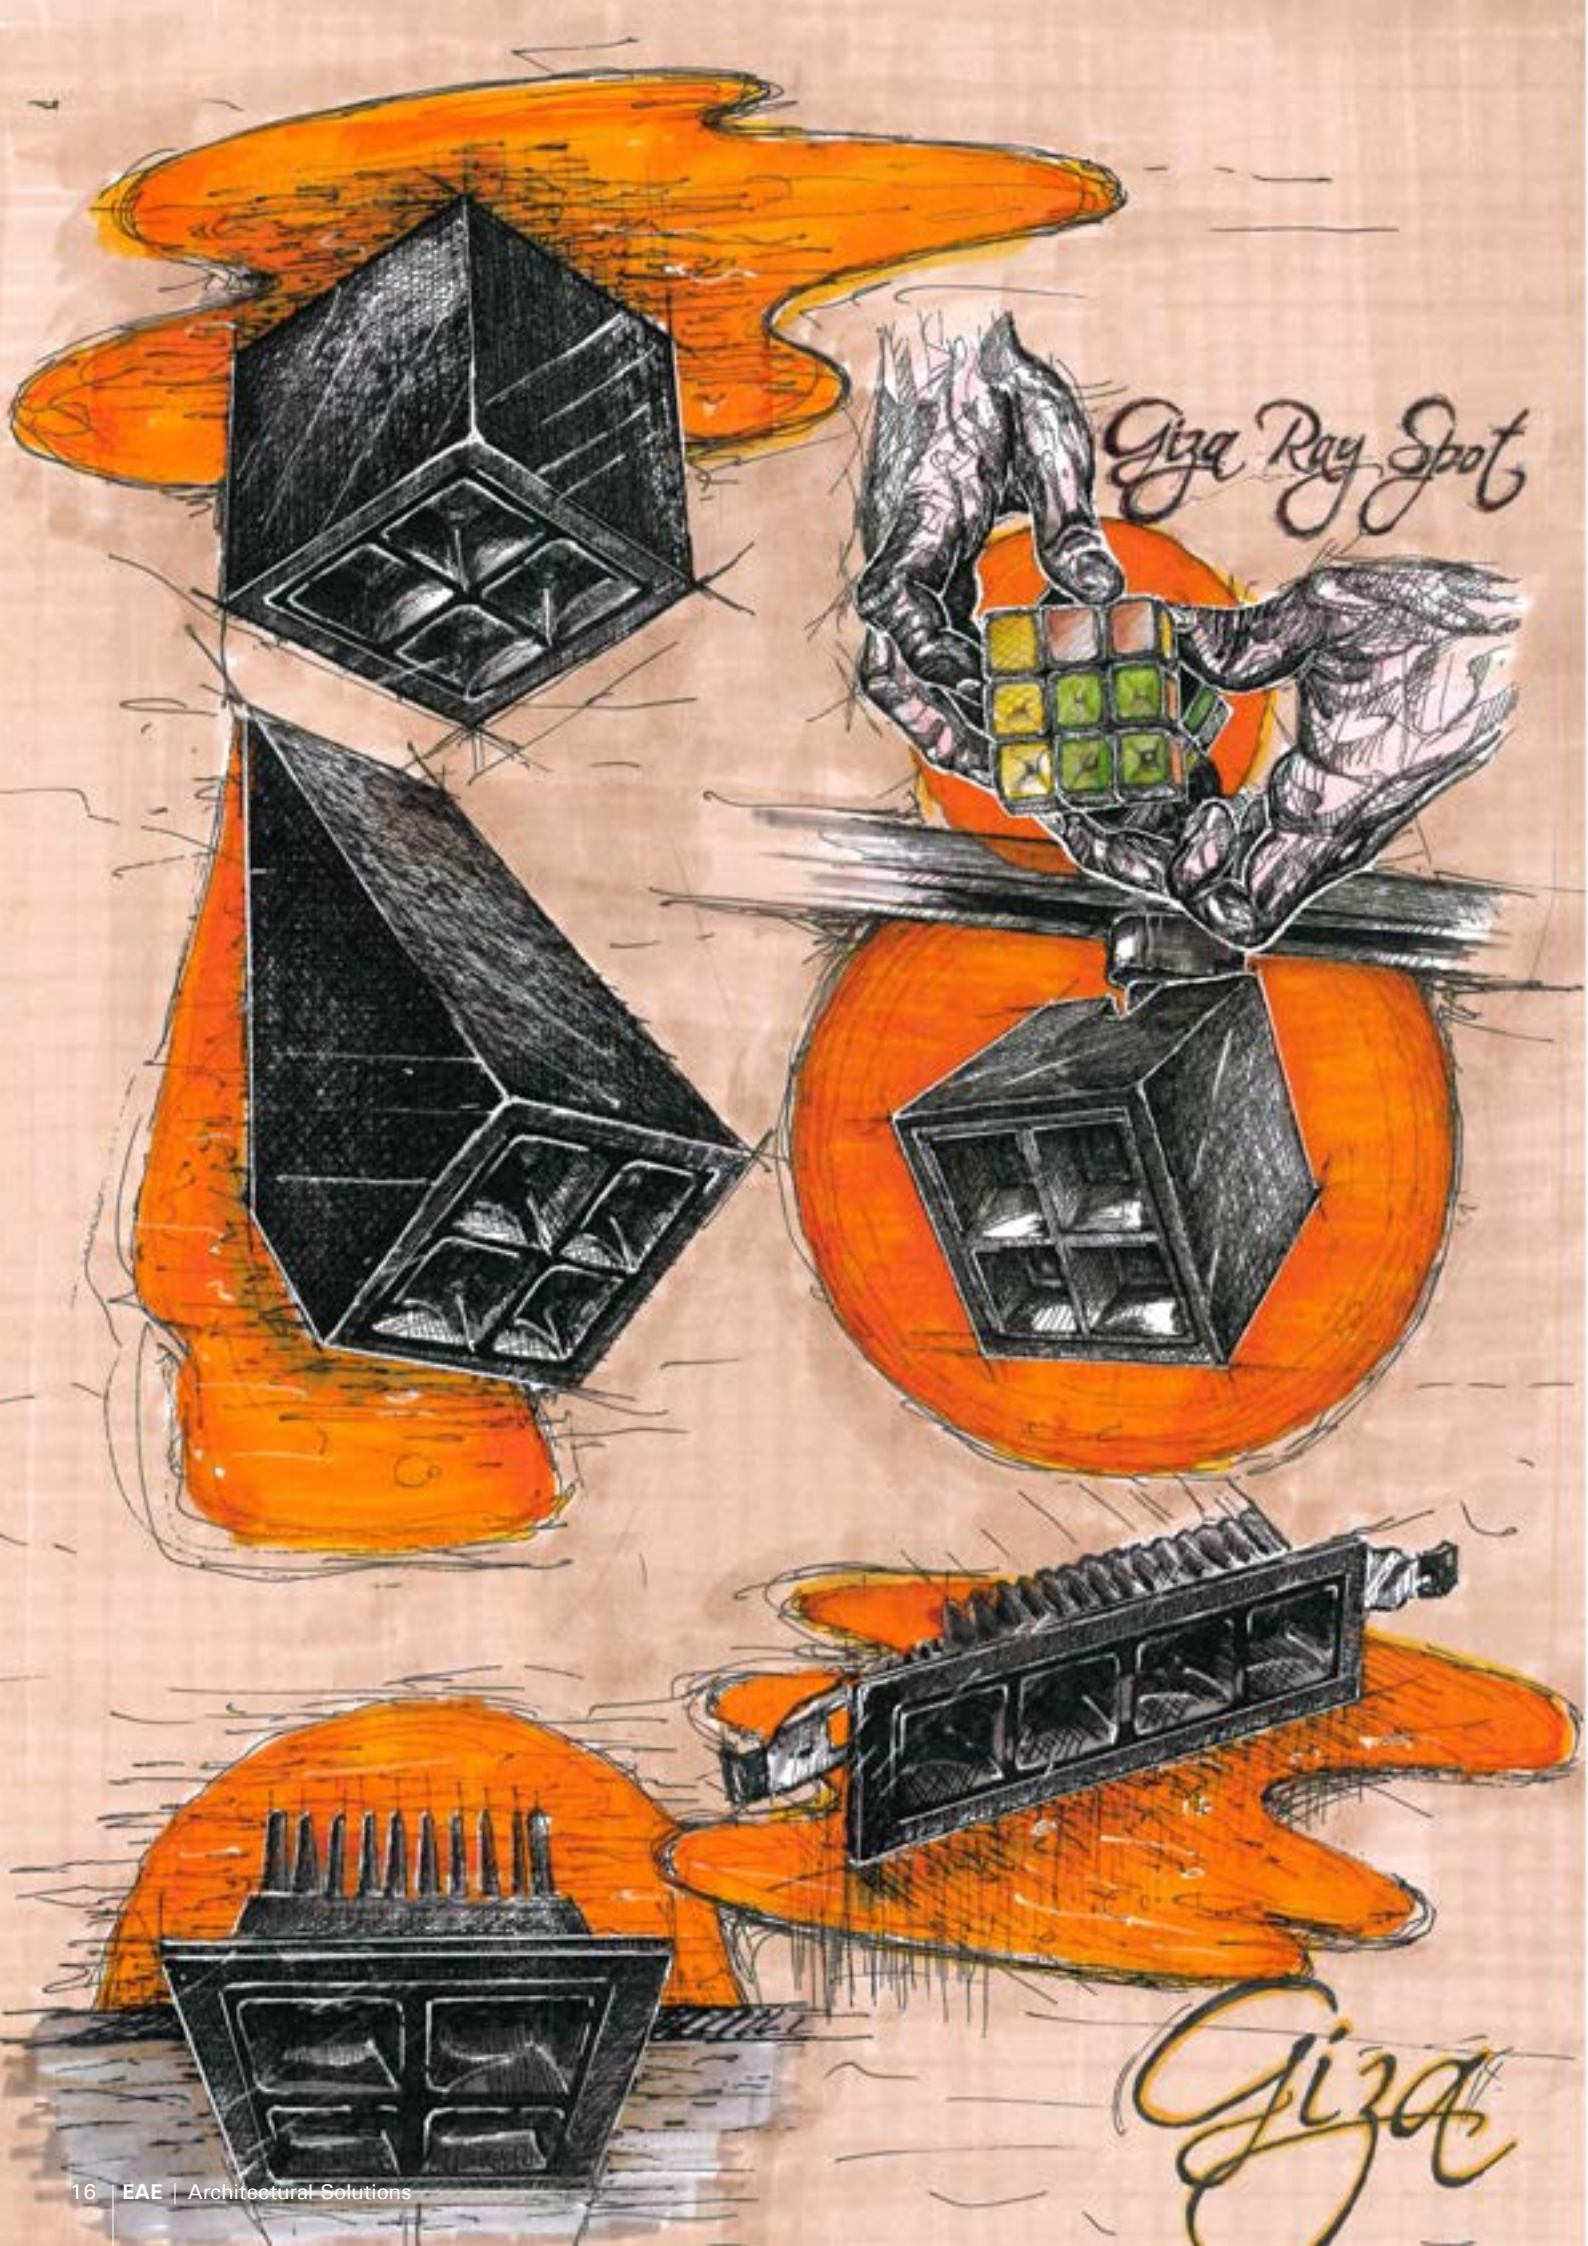

Giza Ray Spot

Giza

GIZA IP20 / IP65 Recessed Mounted



SPOT LIGHTING LUMINAIRES




GIZA recessed mounted, preserving the architectural integrity wherever it is used - retail stores, exhibition halls, meeting rooms and stylish complement to areas such as corridors. With its 75 mm body height, GIZA provides ease of installation in narrow spaces and does not cause glare with its deeply positioned reflector structure, and provides 50° and 80° light distribution thanks to its highly efficient optical design lenses.


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Injection Housing |
| Optic | : 50° / 80° Lens + Reflector (Black) |
| Light Source | : SMD LED |
| Power Consumption | : 8W / 10W / 12W / 15W / 20W / 24W / 28W |
| Lumen | : 894 lm / 1076 lm / 1209 lm / 1376 lm / 2200 lm / 2539 lm / 2963 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 - IP65/20 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |


Technical Drawing

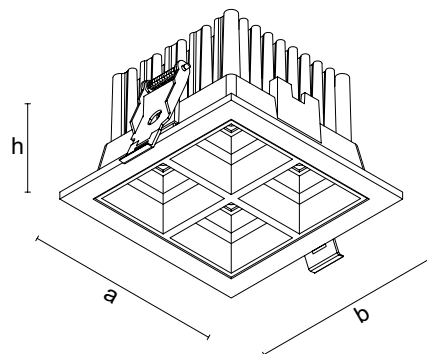


Photometric Data



GIZA IP65

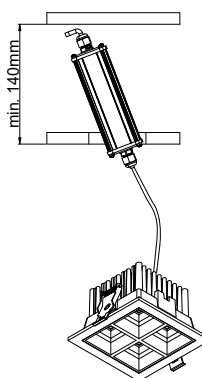

GIZA IP65 / IP20



Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |

Dimensions (mm)

| a | b | h |
|-----|-----|----|
| 100 | 100 | 75 |

Ceiling Cut-Out Dimensions

90 x 90



GIZA IP20 / IP65 Surface Mounted



SPOT LIGHTING LUMINAIRES




“With its minimalist cube-shaped design, GIZA surface-mounted is used to illuminate spaces such as healthcare institutions, hotels, educational institutions, museums and exhibition halls. With its advanced lens structure, the product provides 50° and 80° light distribution as well as efficient light direction.”

Technical Specifications


| | |
|-------------------|---|
| Housing | : Aluminium Injection Housing |
| Optic | : 50° / 80° Lens + Reflector (Black) |
| Light Source | : SMD LED |
| Power Consumption | : 8W / 10W / 12W / 15W / 20W / 24W / 28W |
| Lumen | : 894 lm / 1076 lm / 1209 lm / 1376 lm / 2200 lm / 2539 lm / 2963 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 / > 90 |
| IP | : IP20 / IP65 |
| Mounting Type | : Surface mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing


GIZA IP20



GIZA IP65

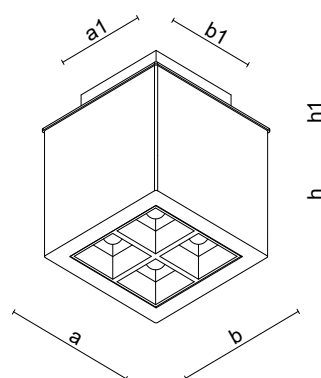

Photometric Data



Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| CRI | : > 90 |

Dimensions (mm)


IP20

| a | b | h |
|-----|-----|-----|
| 105 | 105 | 100 |

IP65

| a | b | h | a1 | b1 | h1 |
|-----|-----|-----|----|----|----|
| 105 | 105 | 100 | 70 | 70 | 20 |



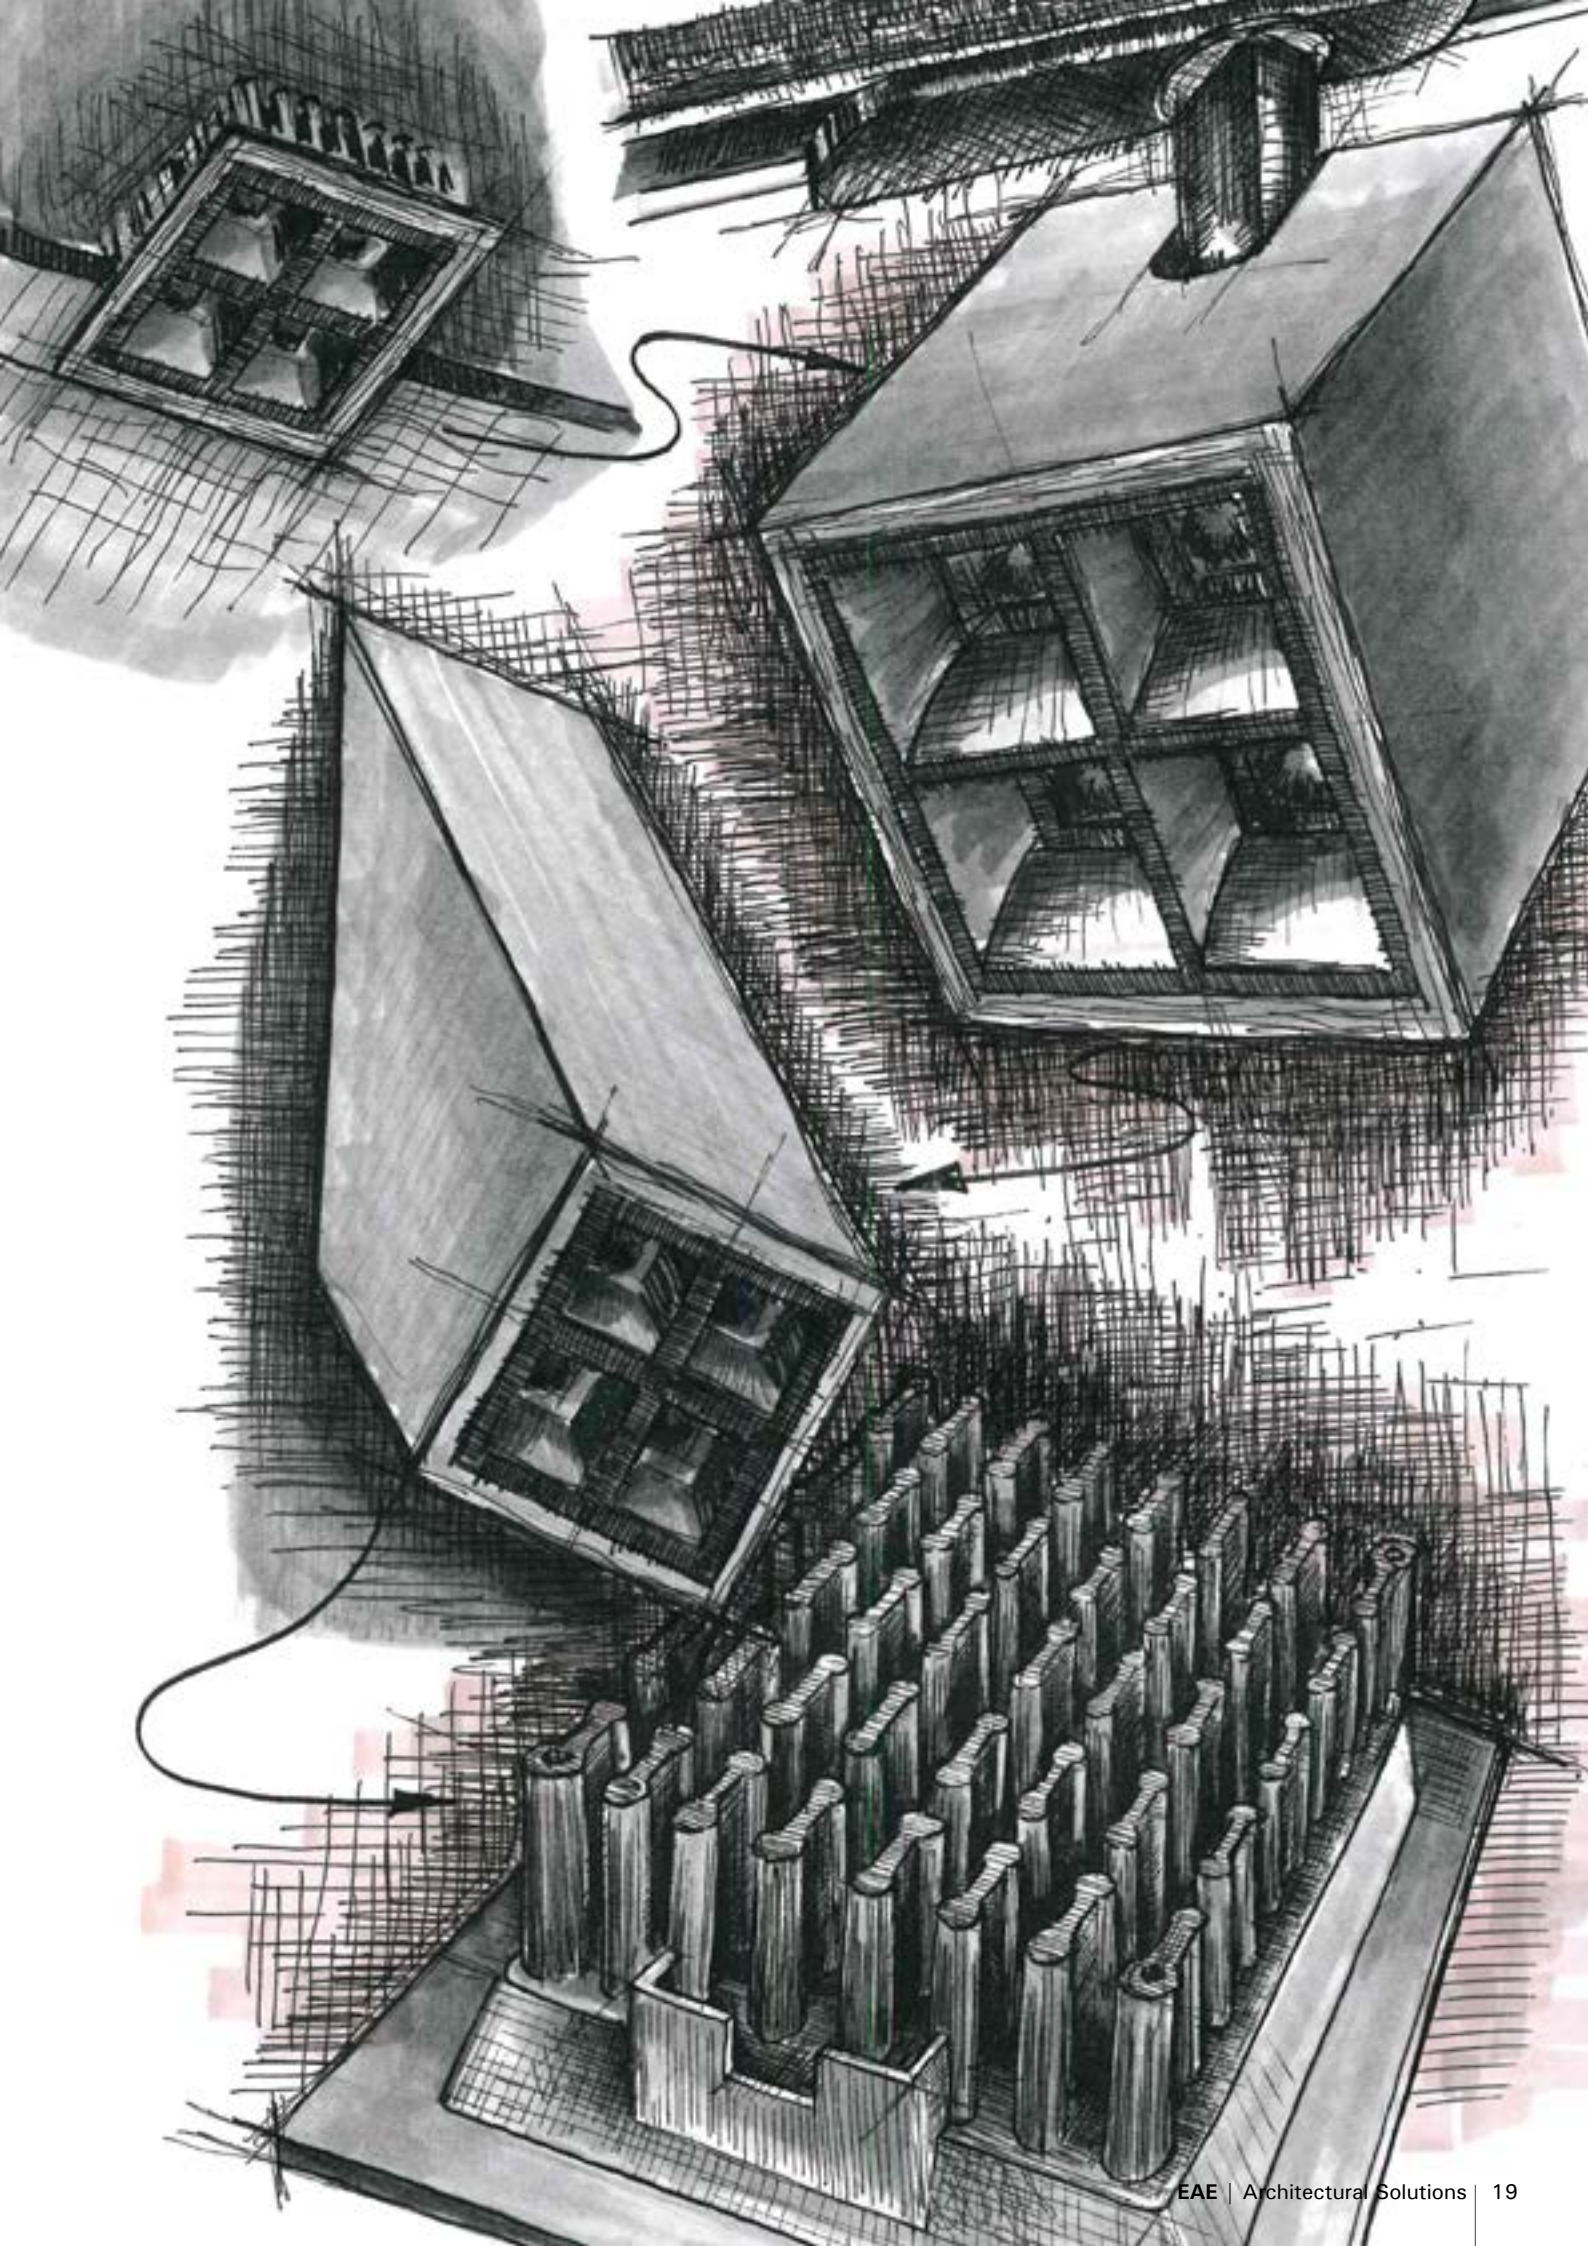

GIZA Slim Surface Mounted Adjustable



SPOT LIGHTING LUMINAIRES




Thanks to its dynamic and movable structure, GIZA SLIM surface-mounted, dynamic and movable, it can rotate 355° around itself, allowing the product to illuminate from various angles. It is ideal for use in spaces where visual comfort is at the forefront such as shops, meeting rooms, residences, museums and exhibition areas. With its high performance LED light source, its optical quality meets the lighting standards required in terms of aesthetics and functionality. GIZA SLIM plaster The top offers a pioneering solution in architectural lighting, providing flexibility and visual appeal to users.


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Injection Housing |
| Optic | : 50° / 80° Lens + Reflector (Black) |
| Light Source | : SMD LED |
| Power Consumption | : 8W / 10W / 12W / 15W / 20W / 24W / 28W |
| Lumen | : 894 lm / 1076 lm / 1209 lm / 1376 lm / 2200 lm / 2539 lm / 2963 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Surface mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

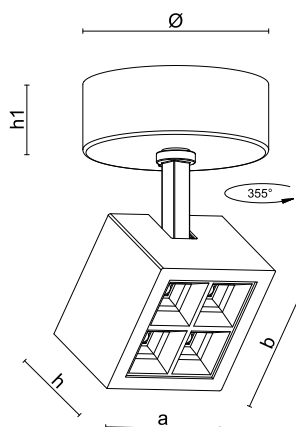

Photometric Data



Dimensions (mm)

| a | b | h | h1 | Ø |
|-----|-----|----|----|-----|
| 105 | 105 | 70 | 50 | 120 |

Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| CRI | : > 90 |



GIZA L4 Recessed Mounted



SPOT LIGHTING LUMINAIRES




GIZA L4, which draws attention with its specially designed optical lenses with high efficiency, provides 50° and 80° light distribution as well as a comfortable and comfortable lighting by minimizing glare with its deeply positioned reflector structure. GIZA L4 is perfect solution for illuminating areas such as museums, exhibition halls, meeting rooms with its recessed mounted installation feature.


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Injection Housing |
| Optic | : 50° / 80° Lens + Reflector (Black) |
| Light Source | : SMD LED |
| Power Consumption | : 6W / 8W / 10W / 12W / 15W |
| Lumen | : 709 lm / 894 lm / 1076 lm / 1209 lm / 1376 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

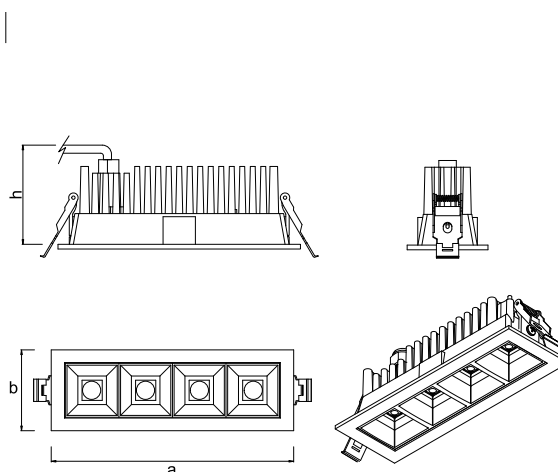

Photometric Data



Dimensions (mm)

| a | b | h |
|-----|----|----|
| 180 | 60 | 65 |

Ceiling Cut-Out Dimensions

50 x 170

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |



GIZA L4 Adjustable Surface Mounted Horizontal / Vertical



SPOT LIGHTING LUMINAIRES




GIZA L4 brings a brand new perspective to interior lighting with its surface-mounted use in two different forms, horizontal and vertical, illuminating interior spaces such as retail stores, museums and exhibition halls in the best way. Thanks to its lensed optics, it offers a flexible lighting solution suitable for different areas by providing 50° and 80° light distributions perfectly. Its design, combined with aesthetics and functionality, adds a modern atmosphere to architectural spaces.

Technical Specifications


| | |
|-------------------|---|
| Housing | : Aluminium Injection Housing |
| Optic | : 50° / 80° Lens + Reflector (Black) |
| Light Source | : SMD LED |
| Power Consumption | : 6W / 8W / 10W / 12W / 15W |
| Lumen | : 709 lm / 894 lm / 1076 lm / 1209 lm / 1376 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Surface mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing


Horizontal



Vertical



Photometric Data



Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| CRI | : > 90 |

Dimensions (mm)

Horizontal

| a | b | h | a1 | b1 | h1 | h2 |
|-----|----|----|-----|----|----|-----|
| 170 | 50 | 52 | 120 | 70 | 50 | 165 |

Vertical

| a | b | h | a1 | b1 | h1 | h2 |
|-----|----|----|-----|----|----|-----|
| 170 | 50 | 52 | 120 | 70 | 50 | 283 |



STORM Surface Mounted Adjustable



SPOT LIGHTING LUMINAIRES




STORM surface-mounted luminaire, which stands out among the new generation surface-mounted luminaires, is designed to meet the lighting needs of retail and exhibition areas at the maximum level. Offering different optical and Lumen values to highlight your projects, the luminaire offers a simple solution to projects that need accent lighting. STORM surface-mounted luminaire perfectly complements your lighting concept by combining aesthetics and functionality with its steerable body.


Technical Specifications

| | |
|-------------------|----------------------------------|
| Housing | : Aluminium Injection Housing |
| Optic | : 24° / 40° Reflektör |
| Light Source | : COB LED |
| Power Consumption | : 20W / 28W / 36W |
| Lumen | : 2420 lm / 3330 lm / 4176 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Surface mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

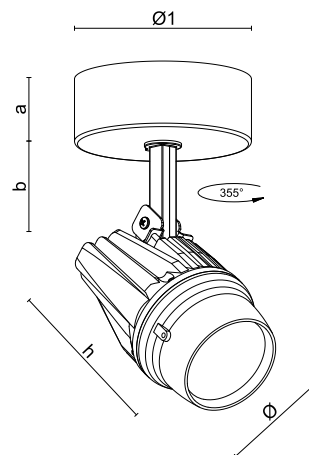

Photometric Data



Dimensions (mm)

| a | b | h | Ø | Ø1 |
|----|----|-----|----|-----|
| 50 | 48 | 138 | 90 | 120 |

Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| CRI | : > 90 |



ESP - BRICK Surface Mounted



SPOT LIGHTING LUMINAIRES




“ESP BRICK surface-mounted, perfectly meets the localized and general illumination needs of any interior space with its compact body design and deeply positioned glare free light source.”


Specifications 2x (Specifications of Double Luminaire)

| | |
|--------------------|--|
| Housing | : Aluminium Housing |
| Optic | : 15° / 25° / 35° / 50° Reflector / Diffuser |
| Light Source | : COB LED |
| Power Consumption | : 2x6W / 2x9W / 2x12W |
| With Opal Diffuser | : (15°) / (25°) / (35°) / (50°) |
| Lumen | |
| 12W | : 1317 lm |
| 18W | : 1975 lm |
| 24W | : 2634 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 3000K / 4000K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Surface mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

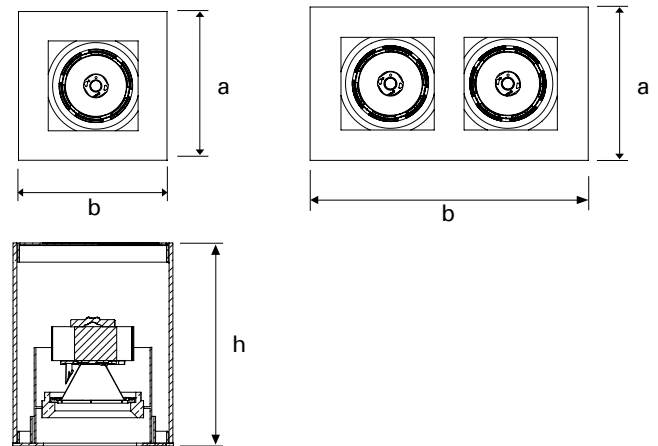

Photometric Data



Dimensions (mm)

| | a | b | h |
|---------|----|-----|-----|
| 1xBRICK | 90 | 90 | 103 |
| 2xBRICK | 90 | 162 | 120 |


Options

| | |
|--------------------|----------------------------|
| Emergency Kit | : Yes (1-3 hours) External |
| DALI Compatibility | : Yes |
| CRI | : > 90 |

External EMG Kit



BRICK V.2 Surface Mounted

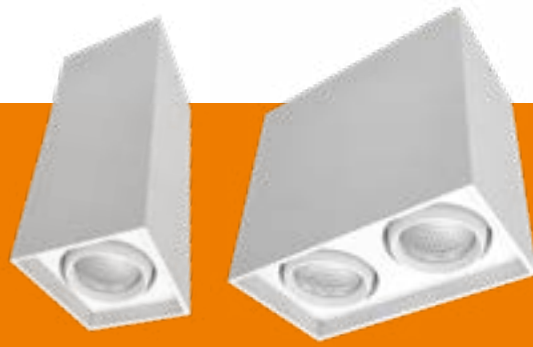

SPOT LIGHTING LUMINAIRES




“BRICK V.2 is available in different sizes and alternatives. With its compact body design and deeply positioned light source that does not cause glare, it perfectly meets the particular and general lighting needs of all kinds of interiors. BRICK V.2 provides solutions to modern lighting concepts with its stylish surface-mounted design.”


Specifications 2x (Specifications of Double Luminaire)

| | |
|-------------------|---|
| Housing | : Aluminium Injection Housing |
| Optic | : 24° / 36° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 2x6W / 2x7W / 2x10W / 2x12W |
| Lumen | : 1384 lm / 1732 lm / 2198 lm / 2390 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Surface mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

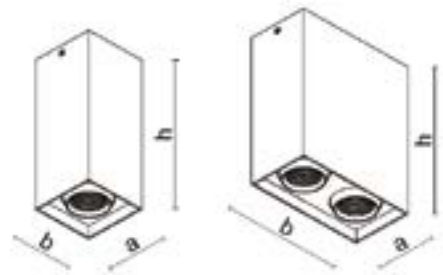

Photometric Data



Dimensions (mm)

| | a | b | h |
|---------|----|-----|-----|
| 1xBRICK | 80 | 80 | 200 |
| 2xBRICK | 80 | 150 | 150 |

Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| CRI | : > 90 |





SPOT LIGHTING LUMINAIRES




BELLA recessed mounted provides an optimal solution to lighting needs with offering a wide range of optics for localized and generalized optimization of your interiors with three different angle options. It distributes light over a wide area or focuses it on a specific area according to the need of use. With its minimal size, it provides ease of application in narrow spaces.


Specifications 2x (Specifications of Double Luminaire)

| | |
|-------------------|---|
| Housing | : Aluminium Injection Housing |
| Optic | : 24° / 36° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 2x6W / 2x7W / 2x10W / 2x12W / 2x15W |
| Lumen | : 1272 lm / 1684 lm / 2120 lm / 2544 lm / 2968 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

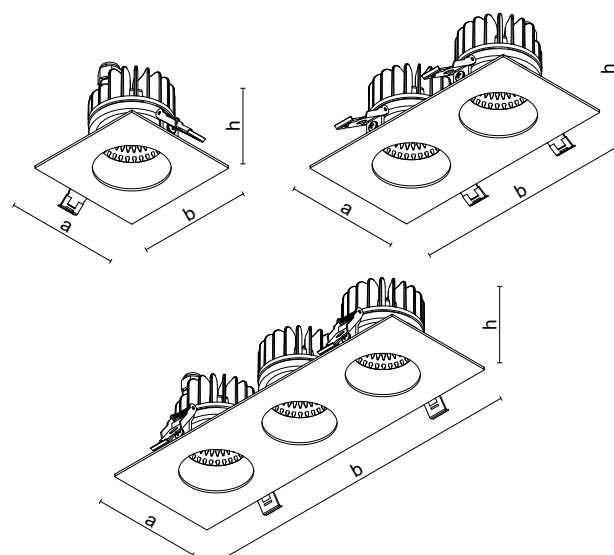

Photometric Data



Dimensions (mm)

| | a | b | h |
|---------|-----|-----|----|
| 1xBELLA | 100 | 100 | 98 |
| 2xBELLA | 100 | 200 | 98 |
| 3xBELLA | 100 | 300 | 98 |

Ceiling Cut-Out Dimensions

| | |
|---------|----------|
| 1xBELLA | 90 x 90 |
| 2xBELLA | 90 x 180 |
| 3xBELLA | 90 x 270 |

Options

| | |
|--------------------|----------------------------|
| Emergency Kit | : Yes (1-3 hours) External |
| DALI Compatibility | : Yes |
| CRI | : > 90 |
| Diffuser | : Opal |

BELLA Surface Mounted



SPOT LIGHTING LUMINAIRES




In addition to its aesthetic design, BELLA surface-mounted luminaires prevent glare with its deeply positioned light source and specially designed reflector optical structure. It takes its place in various areas of use such as health institutions, hotels, stores, meeting rooms and corridors.


Specifications 2x (Specifications of Double Luminaire)

| | |
|-------------------|---|
| Housing | : Aluminium Housing |
| Optic | : 24° / 36° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 2x6W / 2x7W / 2x10W / 2x12W / 2x15W |
| Lumen | : 1272 lm / 1684 lm / 2120 lm / 2544 lm / 2968 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Surface mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

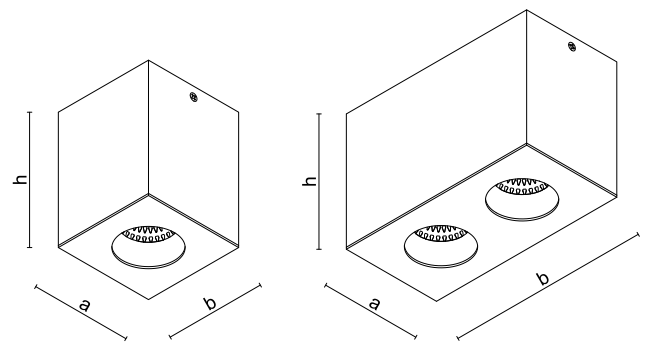

Photometric Data



Dimensions (mm)

| | a | b | h |
|---------|-----|-----|-----|
| 1xBELLA | 100 | 100 | 130 |
| 2xBELLA | 100 | 200 | 130 |

Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| CRI | : > 90 |
| Diffuser | : Opal |





SPOT LIGHTING LUMINAIRES




“ORI MICRO has a diameter of 42mm. Thanks to its deeply positioned light source, it provides homogeneous illumination without creating glare. ORI MICRO, which has two angle options, 24° and 36°, can easily adapt to narrow spaces such as ceiling niches, bookcases and showcases.”


Technical Specifications

| | |
|-------------------|----------------------------------|
| Housing | : Aluminium Housing |
| Optic | : 24° / 36° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 3W |
| Lumen | : 302 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing



Photometric Data



Dimensions (mm)


| Ø | h |
|----|----|
| 42 | 42 |

Ceiling Cut-Out Dimensions

| |
|------|
| Ø 36 |
|------|

Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| CRI | : > 90 |
| Diffuser | : Opal |

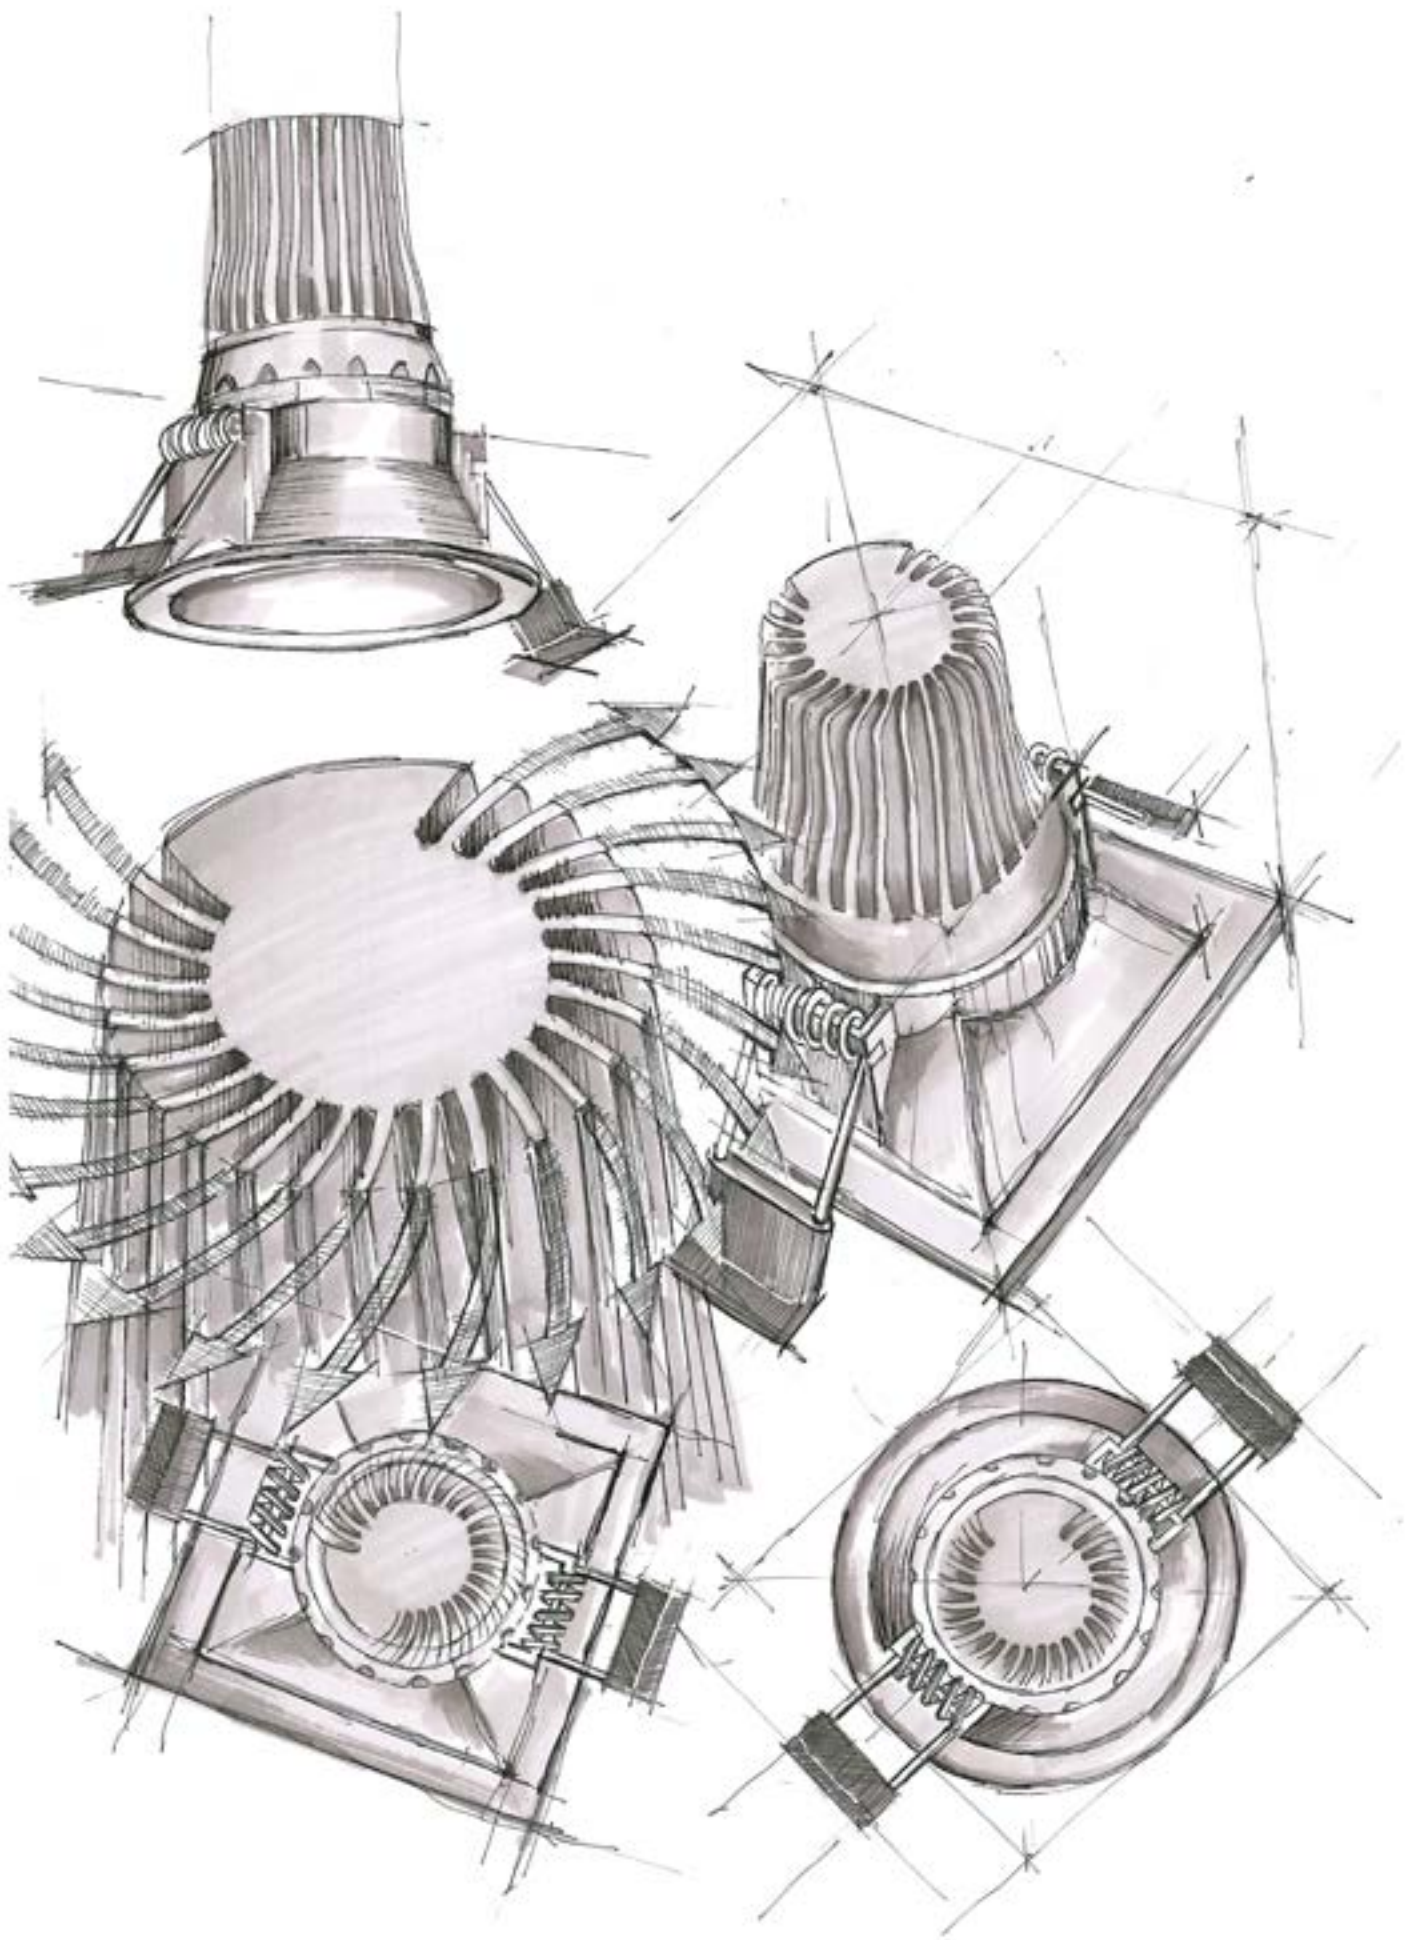



SPOT LIGHTING LUMINAIRES



ORI comes in two different forms, Small and Small Dark. ORI brings a stylish touch to your architectural spaces with its minimalist size. In addition to capturing clear light output with its deeply positioned light source; ORI, which can also provide dark reflector light output, minimizes glare.




Technical Specifications


| | |
|-------------------|--|
| Housing | : Aluminium Injection Housing |
| Optic | : 24° / 36° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 6W / 8W / 10W / 12W / 15W |
| Lumen | : 627 lm / 797 lm / 954 lm / 1108 lm / 1370 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing


Ori Small



Ori Small Dark



Photometric Data



Options

| | |
|--------------------|--|
| Emergency Kit | : None |
| DALI Compatibility | : Yes (6W / 8W / 10W) / None (12W / 15W) |
| CRI | : > 90 |
| Diffuser | : Opal |

Dimensions (mm)

| ORI Small | |
|-----------|-----|
| Ø | h |
| 58 | 100 |

Ceiling Cut-Out Dimensions

| |
|------|
| Ø 52 |
|------|

Ori Small Dark

| Ø | h |
|----|----|
| 65 | 81 |

Ceiling Cut-Out Dimensions

| |
|------|
| Ø 60 |
|------|





SPOT LIGHTING LUMINAIRES




“ORI-Y MINI is more efficient and energy-efficient than traditional LED alternatives. Thanks to its deeply positioned light source, it provides comfortable and aesthetic lighting by preventing glare. Thanks to its recessed mounted design, ORI-Y MINI saves space in the area where it is used, giving architectural spaces an aesthetic and stylish appearance.”

Technical Specifications


| | |
|-------------------|---|
| Housing | : Aluminium Injection Housing |
| Optic | : 24° / 36° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 6W / 8W / 10W / 12W / 15W |
| Lumen | : 678 lm / 853 lm / 1066 lm / 1195 lm / 1370 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 IP65 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing


YV IP65

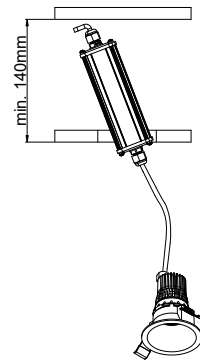


KR IP65

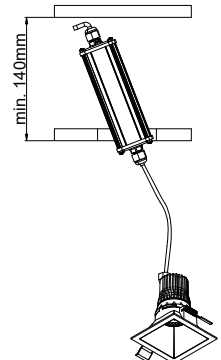


YV IP20



KR IP20



Photometric Data



Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |
| Diffuser | : Opal |

Dimensions (mm)

YV

| Ø | h |
|----|-----|
| 85 | 115 |

KR

| a | b | h |
|----|----|-----|
| 85 | 85 | 115 |

Ceiling Cut-Out Dimensions

| |
|------|
| Ø 76 |
|------|

Ceiling Cut-Out Dimensions

| |
|---------|
| 75 x 75 |
|---------|



SPOT LIGHTING LUMINAIRES




“ORI provides highly effective and energy-efficient lighting in retail and exhibition areas with its fixed body structure and different lumen options. With its recessed mounted design, ORI provides ease of installation without the hassle.”


Technical Specifications

| | |
|-------------------|----------------------------------|
| Housing | : Aluminium Injection Housing |
| Optic | : 24° / 40° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 20W / 28W / 36W |
| Lumen | : 2420 lm / 3330 lm / 4176 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

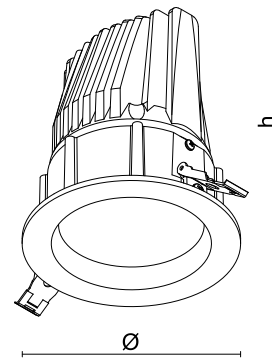

Photometric Data



Dimensions (mm)

| Ø | h |
|-----|-----|
| 120 | 135 |

Ceiling Cut-Out Dimensions

| |
|-------|
| Ø 108 |
|-------|

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |
| Diffuser | : Opal |



SPOT LIGHTING LUMINAIRES





“LUP comes in two different forms, square and round. Thanks to its deeply positioned lenses, it captures clear light output and reduces unwanted reflections. It can be easily used in narrow attics with its low structure coming from its simple design. The lenses can be easily replaced where it is positioned according to the required light angle.”


Technical Specifications

| | |
|-------------------|----------------------------------|
| Housing | : Aluminium Housing |
| Optic | : 24° / 36° / 60° Lens |
| Light Source | : COB LED |
| Power Consumption | : 8W / 10W / 15W |
| Lumen | |
| YV | : 838 lm / 1028 lm / 1411 lm |
| KR | : 852 lm / 1045 lm / 1435 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 / > 90 |
| IP | : IP20 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9005 / RAL 9016 / RAL 7016 |

Technical Drawing



Photometric Data



Dimensions (mm)

| YV | Ø | h |
|----|----|----|
| | 85 | 55 |

| KR | a | b | h |
|----|----|----|----|
| | 85 | 85 | 55 |

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |

Ceiling Cut-Out Dimensions

| |
|------|
| Ø 76 |
|------|

Ceiling Cut-Out Dimensions

| |
|---------|
| 76 x 76 |
|---------|

BISTA MINI IP20 KR / YV



SPOT LIGHTING LUMINAIRES




“BISTA, which has two different minimalist forms, round and square, can easily transmit light to the desired point with its steerable body. Bringing a breath of fresh air to architectural spaces, BISTA has selectable body and reflector options. BISTA, which also has color temperature options such as warm light like 2700K or cooler 6500K, provides flexible use.”


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Injection Housing |
| Optic | : 24° / 40° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 6W / 8W / 10W / 12W / 15W |
| Lumen | : 692 lm / 866 lm / 1099 lm / 1195 lm / 1370 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

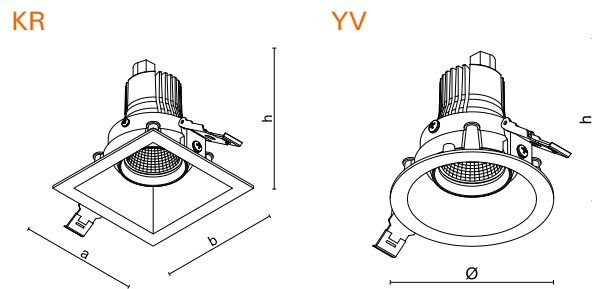

Photometric Data



Dimensions (mm)

KR

| a | b | h |
|-----|-----|-----|
| 100 | 100 | 115 |

Ceiling Cut-Out Dimensions

| |
|---------|
| 92 x 92 |
|---------|

YV

| Ø | h |
|-----|-----|
| 100 | 115 |

Ceiling Cut-Out Dimensions

| |
|------|
| Ø 92 |
|------|

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |
| Diffuser | : Opal |





SPOT LIGHTING LUMINAIRES




PIXA comes in two different body configurations. Using LED light sources, PIXA is an innovative luminaire that is energy efficient and minimizes your maintenance costs with its long service life. Thanks to its deeply positioned light source, it captures clear light output without creating glare. Depending on the lighting design, it has color temperature options from 2700K up to 6500K.


Technical Specifications

| | |
|-------------------|----------------------------------|
| Housing | : Aluminium Injection Housing |
| Optic | : 15° / 30° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 5W / 8W / 10W |
| Lumen | : 445 lm / 712 lm / 859 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

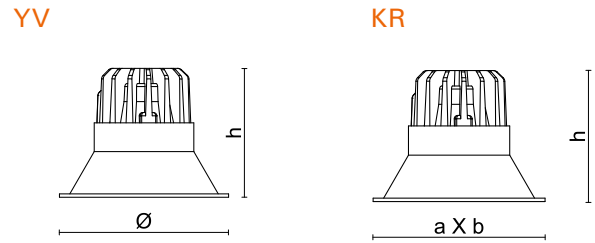

Photometric Data



Dimensions (mm)

KR

| a | b | h |
|-----|-----|----|
| 100 | 100 | 90 |

Ceiling Cut-Out Dimensions

Ø 88

YV

| Ø | h |
|-----|----|
| 100 | 90 |

Ceiling Cut-Out Dimensions

Ø 88

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |





SPOT LIGHTING LUMINAIRES




“BLADE is suitable for use in narrow ceilings with a height of 8.5 cm. BLADE, which has a symmetrical light character, provides protection against dust particles with IP20 class. Creating the effect of light filtering from the ceiling to the space, BLADE provides the highest level of visual comfort.”


Technical Specifications

| | |
|-------------------|--|
| Housing | : Aluminium Injection Housing |
| Optic | : 24° / 36° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 6W / 8W / 10W / 12W / 15W / 20W |
| Lumen | : 660 lm / 880 lm / 1100 lm / 1320 lm / 1552 lm / 2060 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing



Photometric Data



Dimensions (mm)

| Ø | h |
|----|----|
| 85 | 85 |

Ceiling Cut-Out Dimensions

| |
|------|
| Ø 76 |
|------|

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |

Seva

Adjustable





SPOT LIGHTING LUMINAIRES




“SERA ADJUSTABLE provides a stylish touch to interiors. It features a steerable body for curved ceiling applications, highlighting artwork or other architectural features. With a wide range of lumen packages and color temperatures, SERA offers variety of combinations.”


Technical Specifications

| | |
|-------------------|--|
| Housing | : Aluminium Injection Housing |
| Optic | : 24° / 36° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 6W / 8W / 10W / 12W / 15W |
| Lumen | : 636 lm / 848 lm / 1060 lm / 11248 lm / 1484 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing



Photometric Data



Dimensions (mm)

| Ø | h |
|-----|-----|
| 100 | 115 |

Ceiling Cut-Out Dimensions

| |
|------|
| Ø 90 |
|------|

Options

| | |
|--------------------|-----------------------------|
| Emergency Kit | : Yes (1-3 hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |
| Optic | : Opal Diffuser |
| Colour | : Customizable Frame Colour |

LORY Flat IP65 / IP20 KR / YV Recessed Mounted



SPOT LIGHTING LUMINAIRES




LORY FLAT, which belongs to the IP65 protection class, is the ideal choice for bathrooms and humid environments with a wet volume. Available in two different shapes, round and square, LORY is suitable for narrow ceiling applications and provides significant savings compared to conventional lighting thanks to its high luminous efficiency. Thanks to the light source positioned 80mm deep into the ceiling, it does not create glare and provides comfortable lighting. It has a symmetrical spot effect in terms of light character and creates the effect of light filtering into the space.

Technical Specifications


| | |
|-------------------|---|
| Housing | : Aluminium Injection Housing |
| Optic | : 24° / 36° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 8W / 10W / 12W / 15W / 20W |
| Lumen | : 800 lm / 984 lm / 1149 lm / 1378 lm / 1820 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP65 - IP65/20 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing


IP65

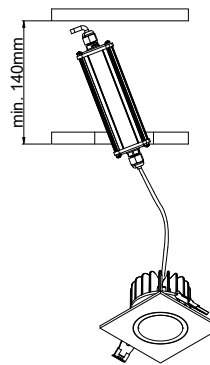


IP65

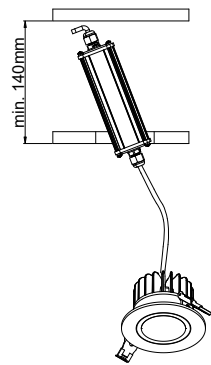


Photometric Data



KR IP65 / IP20



YV IP65 / IP20



Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |

Dimensions (mm)

KR

| a | b | h |
|----|----|----|
| 90 | 90 | 80 |

YV

| ∅ | h |
|----|----|
| 89 | 80 |

Ceiling Cut-Out Dimensions


| |
|------|
| ∅ 78 |
|------|

Ceiling Cut-Out Dimensions

| |
|------|
| ∅ 78 |
|------|



Lovy

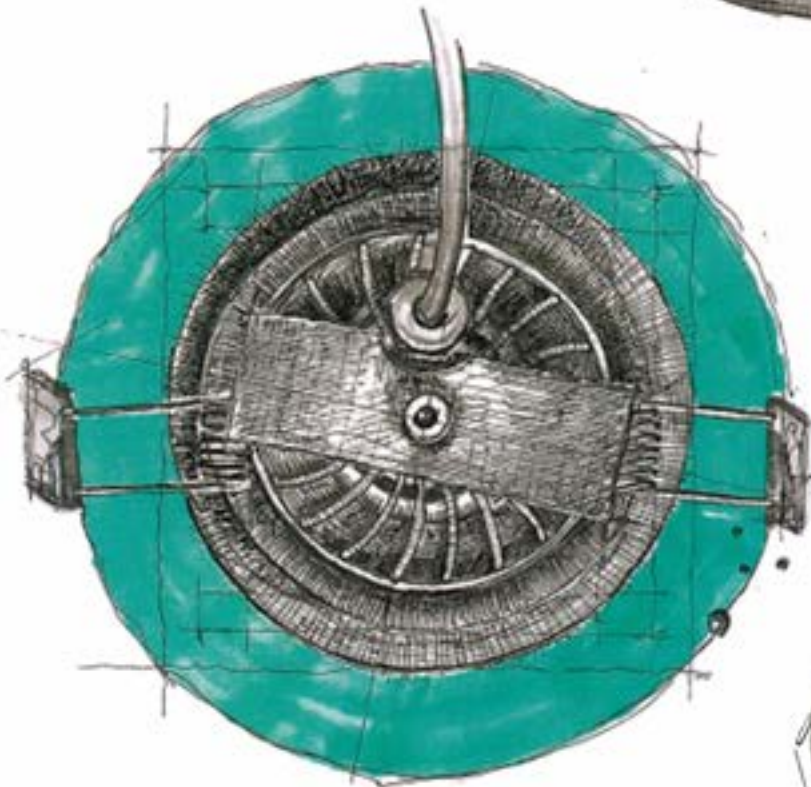

Jp65



SPOT LIGHTING LUMINAIRES




“LORY offers IP65 protection against dust and water splashes. Thanks to its high luminous efficiency, it achieves significant savings compared to conventional lighting. It offers comfortable lighting without creating glare with its deeply positioned rich spectrum LEDs.”


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Injection Housing |
| Optic | : 24° / 36° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 6W / 8W / 10W / 12W / 15W / 20W |
| Lumen | : 641 lm / 800 lm / 984 lm / 1149 lm / 1378 lm / 1820 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 / IP65 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |


Technical Drawing

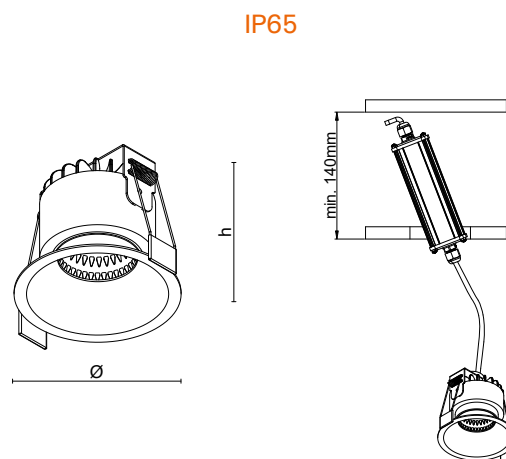

Photometric Data



IP20



Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |

Dimensions (mm)

| Ø | h |
|----|-----|
| 96 | 110 |

Ceiling Cut-Out Dimensions

| |
|------|
| Ø 86 |
|------|





SPOT LIGHTING LUMINAIRES




“DELTA has two different shapes, round and square. It provides flexibility to the user with narrow, medium and wide optical angles of 24° / 36° / 60°. They exhibit ideal performance in humid and dusty volumes with high IP value. DELTA, which has lensed optics, captures clear light output.”

Technical Specifications


| | |
|-------------------|---|
| Housing | : Aluminium Housing |
| Optic | : 24° / 36° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 8W / 10W / 12W / 15W / 20W |
| Lumen | : 800 lm / 984 lm / 1149 lm / 1378 lm / 1820 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 / IP65 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Photometric Data




Technical Drawing

YV



KR



Dimensions (mm)

YV

| | Ø | h |
|----------|-----|----|
| Standard | 100 | 85 |

Ceiling Cut-Out Dimensions

| |
|------|
| Ø 92 |
|------|

KR




| | a | b | h |
|----------|-----|-----|----|
| Standard | 100 | 100 | 85 |

Ceiling Cut-Out Dimensions

| |
|-------|
| 92x92 |
|-------|



YV IP65

KR IP65



YV IP65/20

KR IP65/20



Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |





SPOT LIGHTING LUMINAIRES




S-NAIL is ideal for object, wall and table lighting with its aesthetic body design and steerable body spot mechanism. The product, which stands out with its optical diversity and different lumen values, is ideal for sloping ceiling applications with its mobility and steerability.

Technical Specifications


| | |
|-------------------|----------------------------------|
| Housing | : Aluminium Injection Housing |
| Optic | |
| 1x | : 15° / 30° |
| 2x | : 15° / 30° |
| Light Source | : COB LED |
| Power Consumption | |
| 1x | : 8W / 10W |
| 2x | : 2x8W / 2x10W |
| Lumen | |
| 1x | : 724 lm / 906 lm |
| 2x | : 1448 lm / 1812 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing


SNAIL 1X



SNAIL 2X



Photometric Data



Dimensions (mm)

SNAIL 1X

| axb | h |
|---------|-----|
| 121x121 | 100 |

SNAIL 2X

| axb | h |
|---------|-----|
| 231x121 | 100 |

Ceiling Cut-Out Dimensions

| |
|---------|
| 105x105 |
|---------|

Ceiling Cut-Out Dimensions

| |
|---------|
| 210x105 |
|---------|

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |



SPOT LIGHTING LUMINAIRES




“ KRIZA V.2 is a professional lighting design that provides accent lighting with its thin frame that fits smoothly on the floor. Thanks to its various reflector options, it easily offers the desired results in lighting design. ”


Technical Specifications 2x (Specifications of Double Luminaire)

- Housing : Aluminium Injection Housing
- Optic : 24° / 36° / 60° Reflector
- Light Source : COB LED
- Power Consumption : 2x20W / 2x28W / 2x36W
- Lumen : 4840 lm / 6660 lm / 8350 lm
- Input Voltage : 220-240V AC 50/60Hz
- Color Temperature : 2700K / 3000K / 4000K / 6500K
- CRI : > 80
- IP : IP20
- Mounting Type : Recessed mounted
- Housing Colour : RAL 9005 / RAL 9006 / RAL 9016

Technical Drawing

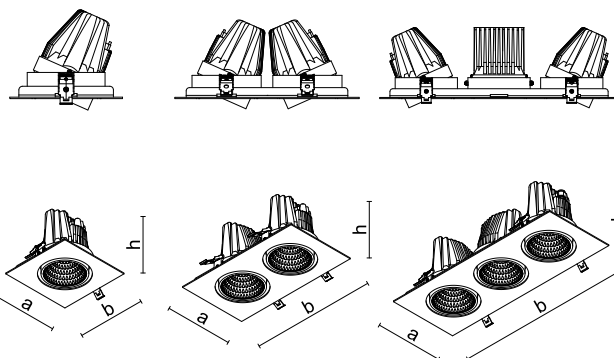

Photometric Data



Dimensions (mm)

| | a | b | h |
|----------|-----|-----|-----|
| KRIZA 1x | 155 | 155 | 120 |
| KRIZA 2x | 155 | 285 | 120 |
| KRIZA 3x | 155 | 410 | 120 |

Ceiling Cut-Out Dimensions

| | |
|----------|-----------|
| KRIZA 1x | 140 x 140 |
| KRIZA 2x | 140 x 265 |
| KRIZA 3x | 140 x 390 |

Options

- Emergency Kit : Yes (1-3 hours)
- DALI Compatibility : Yes
- CRI : > 90

Kriza mini





SPOT LIGHTING LUMINAIRES




KRIZA MINI allows the illumination of different interior spaces for residential or commercial application areas with its functional mobile structure combined with innovation without neglecting aesthetics and technique. Thanks to the LED light source positioned deep inside the body, it maximizes eye comfort without creating glare. The direction of the light can be easily changed through the adjustable light source mechanism. Various combinations can be created by choosing the body and reflector colors created upon request.


Technical Specifications 2x (Specifications of Double Luminaire)

| | |
|-------------------|---|
| Housing | : Aluminium Injection Housing |
| Optic | : 24° / 40° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 2x6W / 2x8W / 2x10W / 2x12W / 2x15W |
| Lumen | : 1384 lm / 1732 lm / 2198 lm / 2390 lm / 2740 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

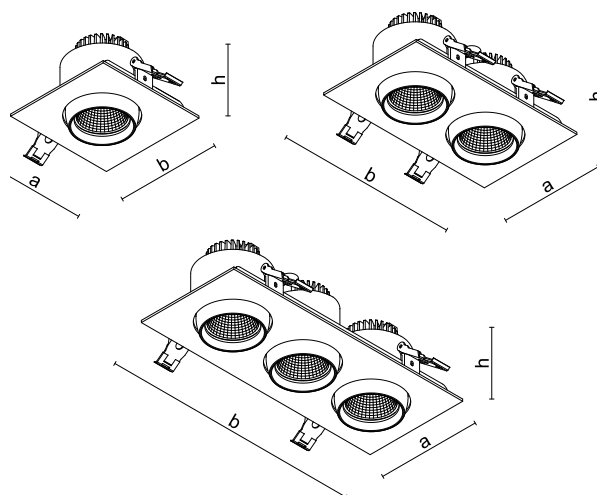

Photometric Data



Dimensions (mm)


| | a | b | h |
|---------------|----|-----|----|
| KRIZA mini 1x | 95 | 95 | 80 |
| KRIZA mini 2x | 95 | 165 | 80 |
| KRIZA mini 3x | 95 | 237 | 80 |

Ceiling Cut-Out Dimensions

| | |
|---------------|----------|
| KRIZA mini 1x | 87 x 87 |
| KRIZA mini 2x | 87 x 152 |
| KRIZA mini 3x | 87 x 224 |

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |

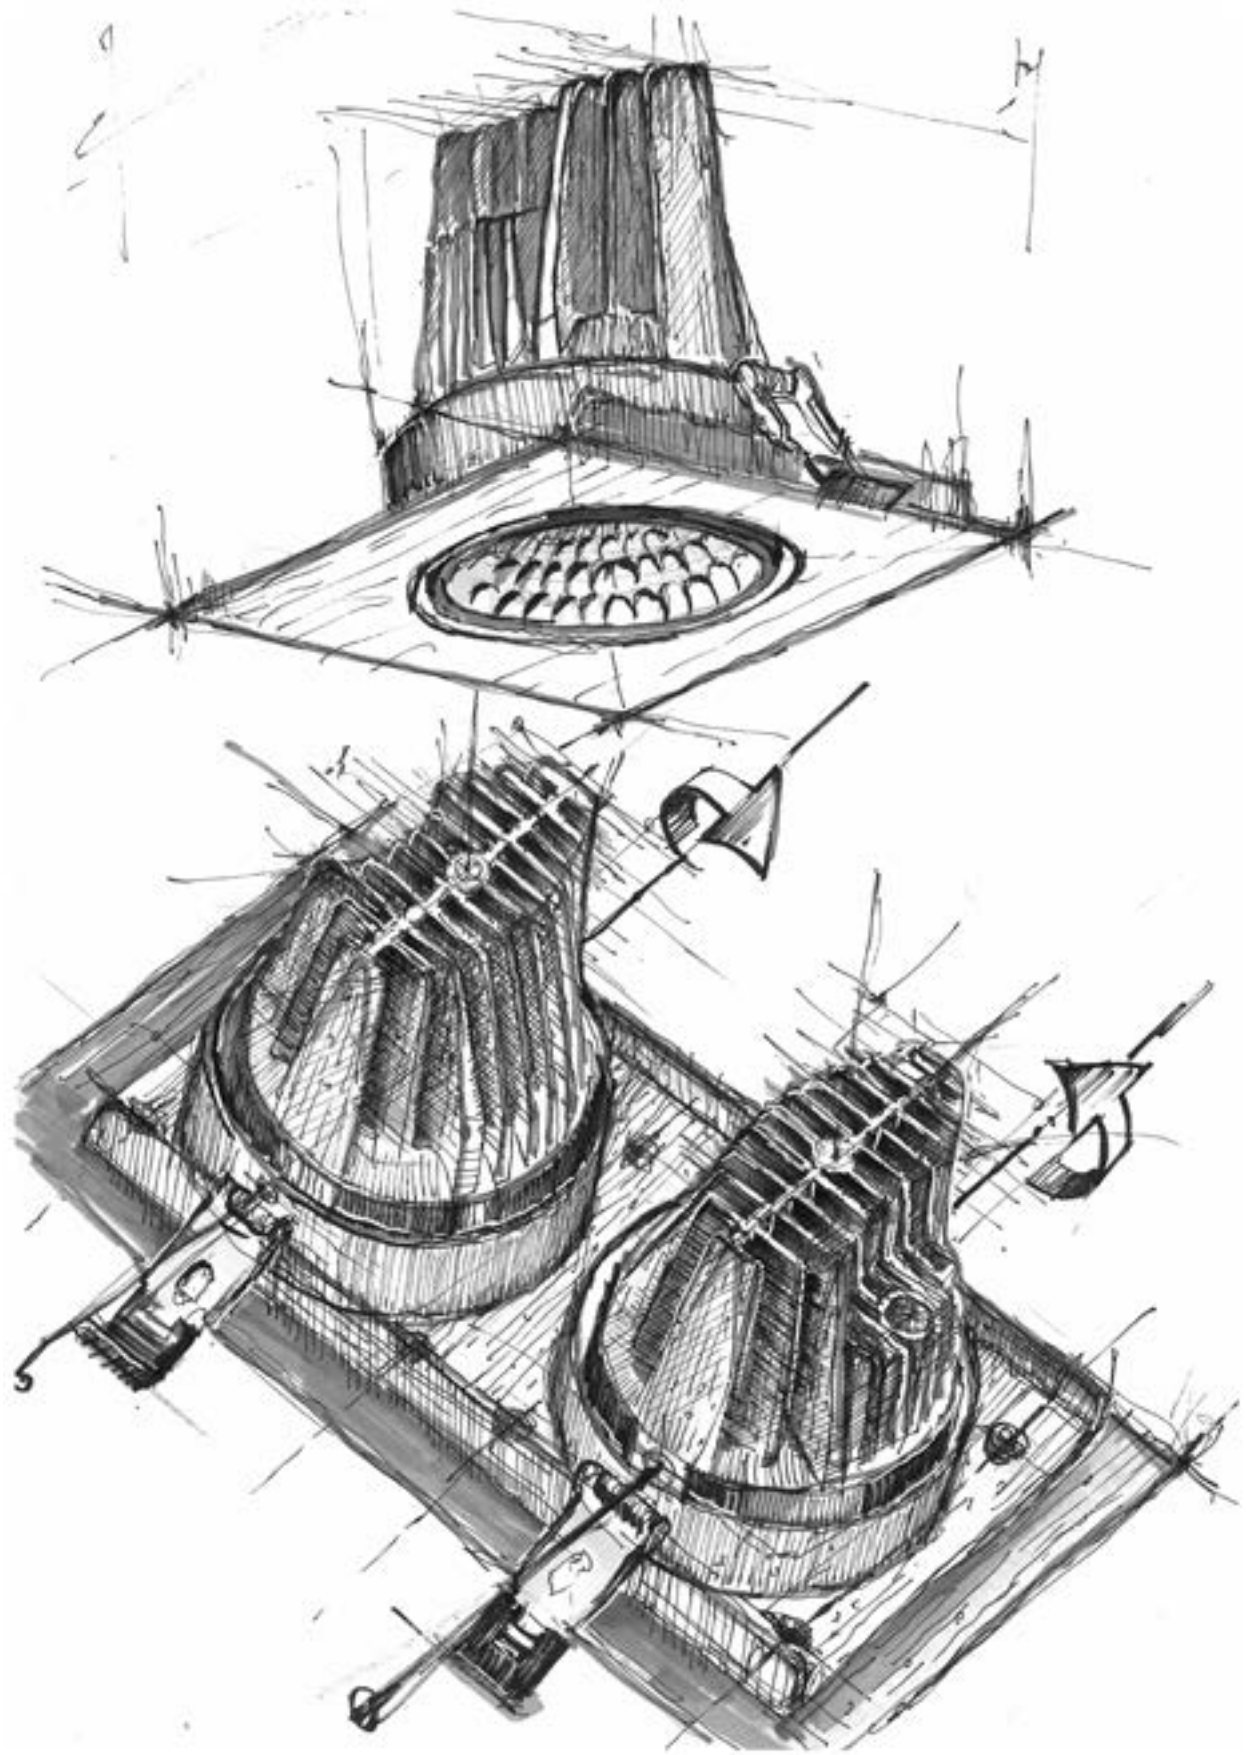

PLANO 1x / 2x



SPOT LIGHTING LUMINAIRES




“ PLANO is available in single and double body options. It offers maximum performance with its optical diversity and wide lumen range. Thanks to its biaxial steerable spot mechanism feature; it is ideal for areas where spot lighting is needed such as offices, stores, showrooms and retail. ”


Technical Specifications

| | |
|-------------------|--|
| Housing | : Aluminium Injection Housing |
| Optic | : 15° / 30° Reflector |
| Light Source | : COB LED |
| Power Consumption | |
| 1x | : 5W / 8W / 10W / 12W / 14W |
| 2x | : 2x5W / 2x8W / 2x10W / 2x12W / 2x14W |
| Lumen | |
| 1x | : 496 lm / 794 lm / 992 lm / 1192 lm / 1388 lm |
| 2x | : 859 lm / 1424 lm / 1780 lm / 2136 lm / 2492 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

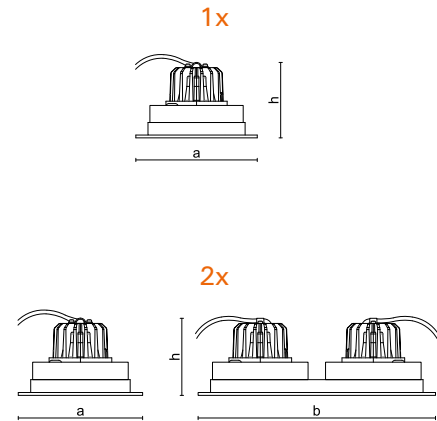

Photometric Data



Dimensions (mm)

| | a | b | h |
|----------|-----|-----|----|
| Plano 1x | 121 | 121 | 75 |
| Plano 2x | 121 | 231 | 75 |

Ceiling Cut-Out Dimensions

| | |
|----------|-----------|
| Plano 1x | 105 x 105 |
| Plano 2x | 210 x 105 |

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |



SQUARE



SPOT LIGHTING LUMINAIRES




“*SQUARE combines the advantages of high performance LED technology, energy saving, optical quality and visual comfort. It is a solution-oriented spotlight with four different sizes. Thanks to its deeply positioned LED source, it provides a clear light output and provides eye-friendly lighting. Available in various body and reflector colors, SQUARE enables various combinations for the user.*”


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Injection Housing |
| Optic | : 24° / 36° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 6W / 8W / 10W / 12W / 15W / 20W |
| Lumen | : 636 lm / 848 lm / 1060 lm / 1272 lm / 1478 lm / 2040 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

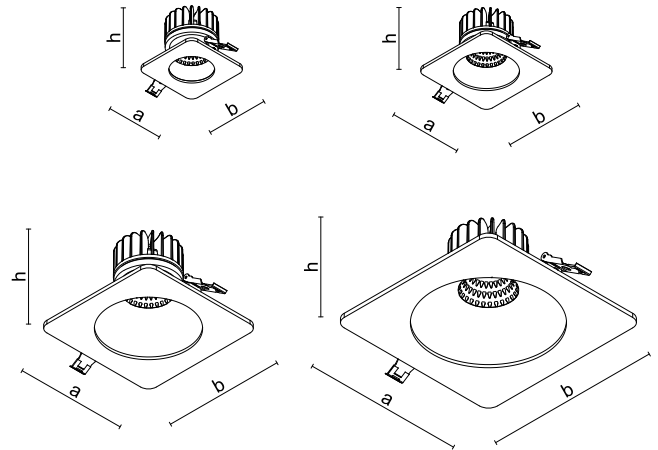

Photometric Data



Dimensions (mm)

| | a | b | h |
|--------------|-----|-----|-----|
| 90mm Square | 90 | 90 | 95 |
| 115mm Square | 115 | 115 | 95 |
| 140mm Square | 140 | 140 | 115 |
| 170mm Square | 170 | 170 | 105 |

Ceiling Cut-Out Dimensions

| | |
|--------------|------|
| 90mm Square | Ø76 |
| 115mm Square | Ø102 |
| 140mm Square | Ø127 |
| 170mm Square | Ø152 |

Options

| | |
|--------------------|---|
| Emergency Kit | : Yes (1-3 hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |
| Optic | : Opal Diffuser |
| Colour | : Customizable Frame and Reflector Colour |



ROUND



SPOT LIGHTING LUMINAIRES




“ROUND is equipped with advanced LED technology. The round shape is available in four different body sizes. Deeply positioned reflectors provide a softer light output. It enables various combinations with optional body and reflector colors. With its high luminous efficiency, it provides significant savings compared to conventional lighting.”


Technical Specifications

| | |
|-------------------|--|
| Housing | : Aluminium Injection Housing |
| Optic | : 24° / 36° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 6W / 8W / 10W / 12W / 15W / 20W |
| Lumen | : 636 lm / 848 lm / 1060 lm / 1272 lm / 1485 lm / 2040 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

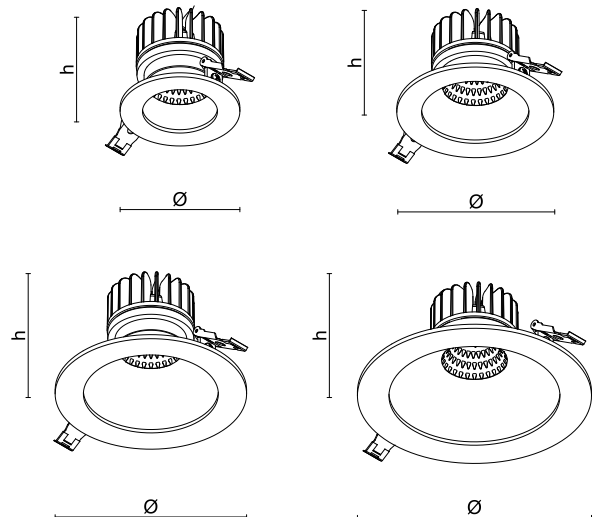

Photometric Data



Dimensions (mm)

| | Ø | h |
|-------------|-----|-----|
| Round 87mm | 87 | 95 |
| Round 114mm | 114 | 95 |
| Round 139mm | 139 | 110 |
| Round 169mm | 169 | 105 |


Ceiling Cut-Out Dimensions

| | |
|-------------|-------|
| Round 87mm | Ø 76 |
| Round 114mm | Ø 102 |
| Round 139mm | Ø 127 |
| Round 169mm | Ø 152 |

Options

| | |
|--------------------|---|
| Emergency Kit | : Yes (1-3 hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |
| Colour | : Customizable Frame and Reflector Colour |



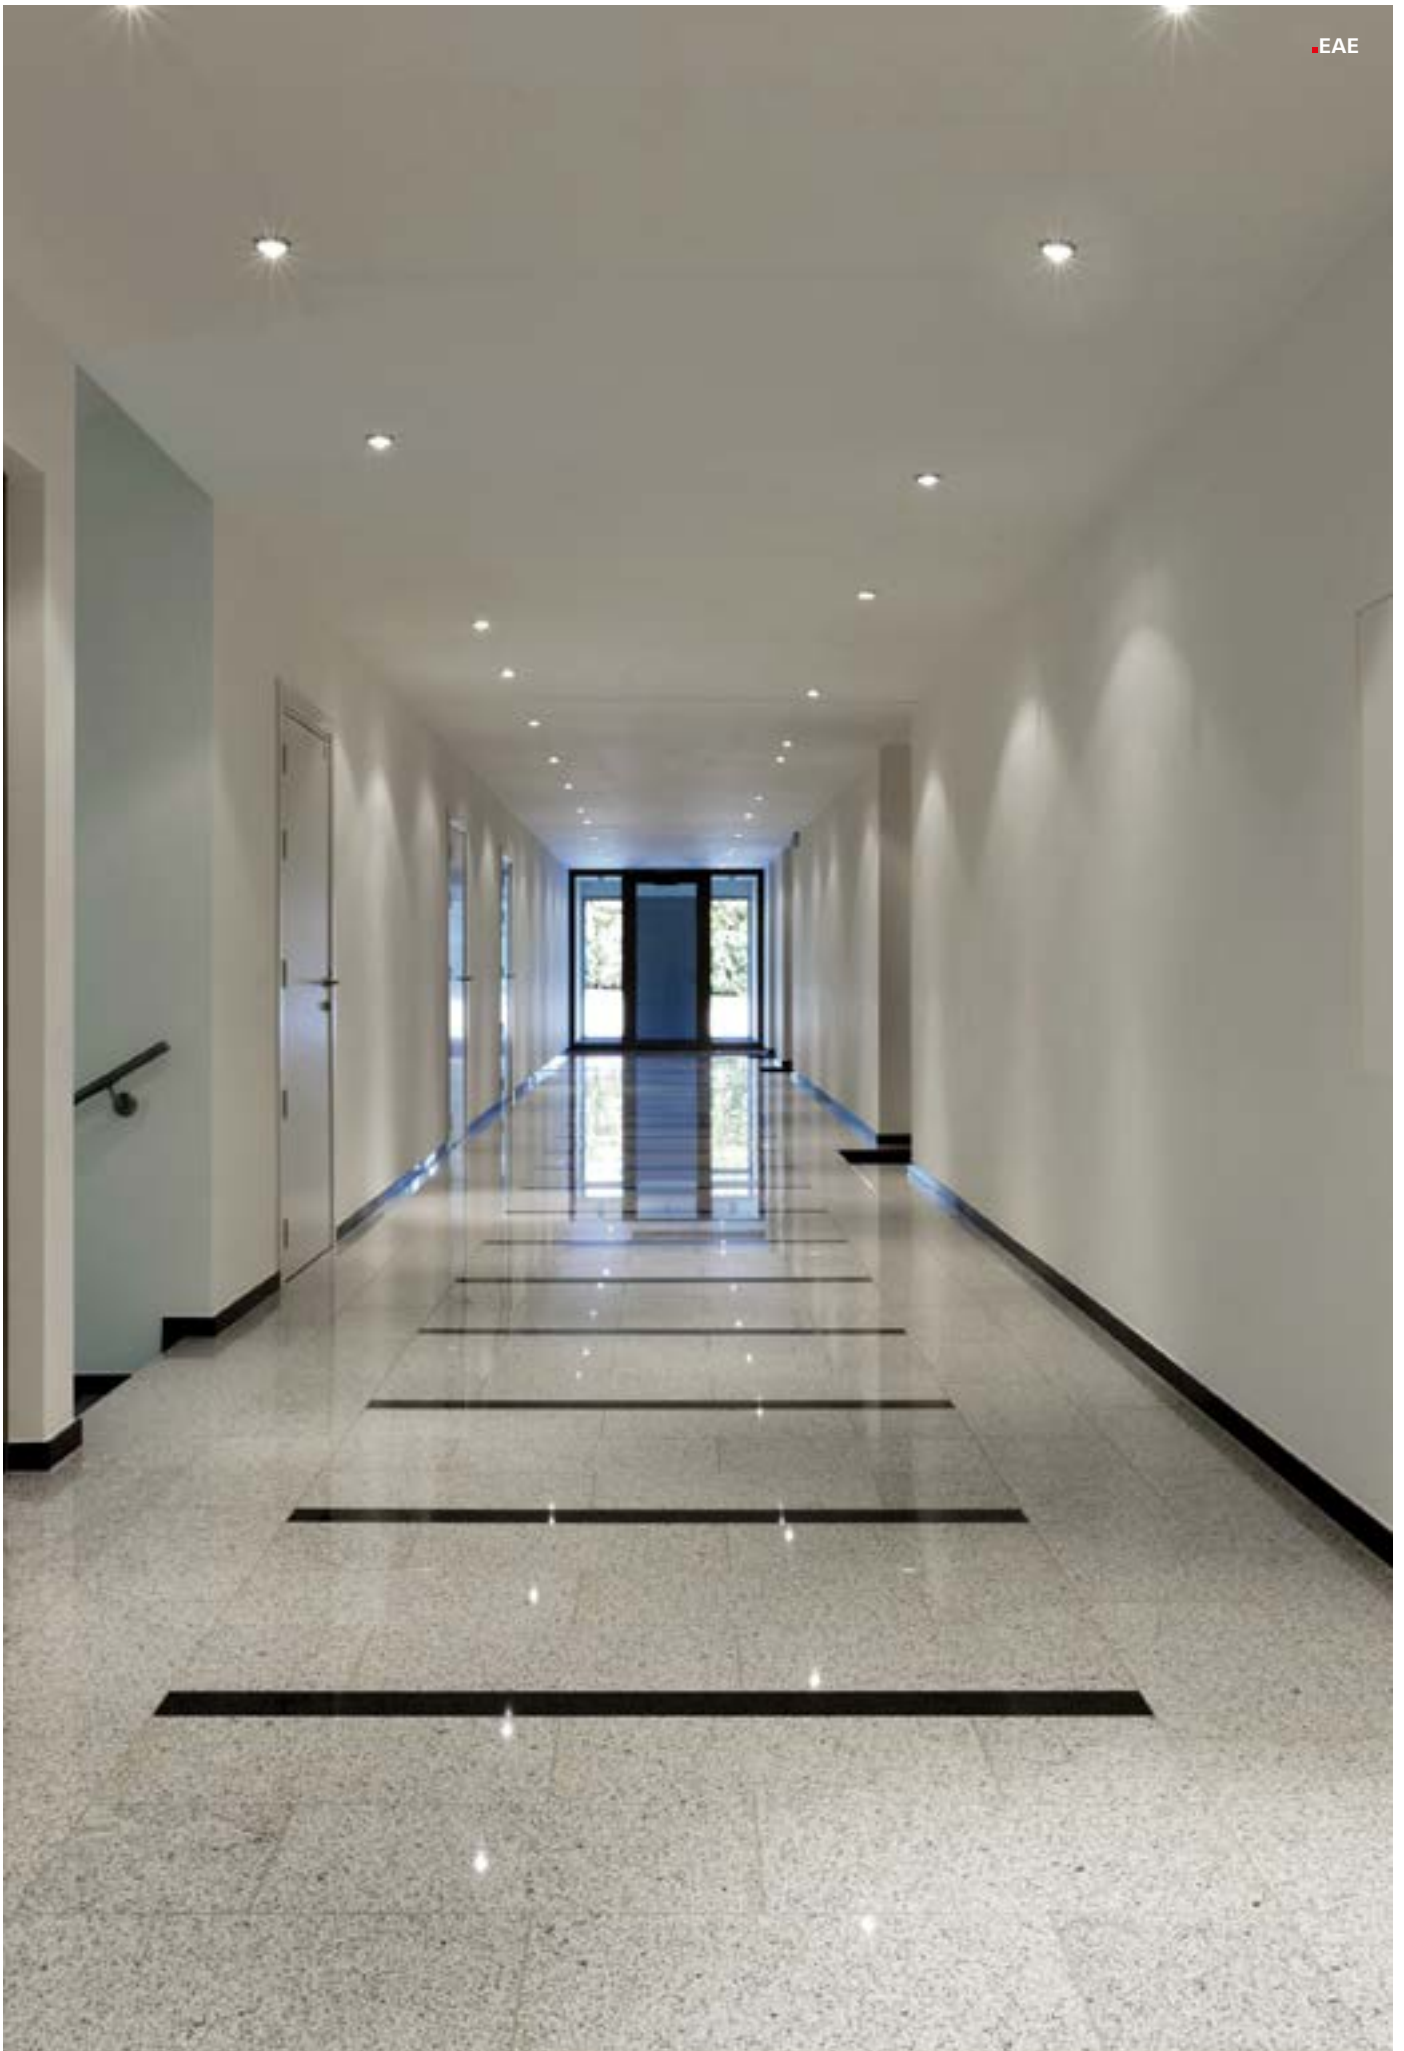

BISTA V.2 Adjustable

IP65 / IP20 - YV / KR



SPOT LIGHTING LUMINAIRES




“With its steerable body available in square and round forms, BISTA captures clear light output without creating glare with its deeply positioned light source. With its omni-directional biaxial spot mechanism, it is ideal for retail environments where accent lighting is needed.”


Technical Specifications

| | |
|-------------------|----------------------------------|
| Housing | : Aluminium Injection Housing |
| Optic | : 24° / 40° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 20W / 28W / 36W |
| Lumen | : 2420 lm / 3330 lm / 4175 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP65 - IP20 - IP65/20 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

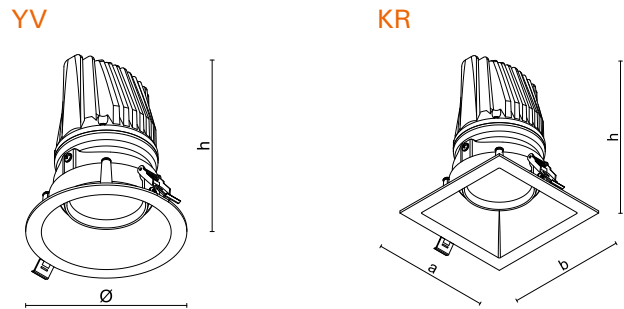

Photometric Data



Dimensions (mm)

| YV | | KR | | |
|----------------------------|-----|----------------------------|-----|-----|
| Ø | h | a | b | h |
| 140 | 165 | 137 | 137 | 165 |
| Ceiling Cut-Out Dimensions | | Ceiling Cut-Out Dimensions | | |
| Ø 124 | | 124 x 124 | | |

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |





SPOT LIGHTING LUMINAIRES





Designed in round and square forms, BISTA is the ideal choice for accent lighting with its fixed body. Thanks to its deep light source, it minimizes the glare that may occur in the environment and maximizes visual comfort.


Technical Specifications

| | |
|-------------------|----------------------------------|
| Housing | : Aluminium Injection Housing |
| Optic | : 24° / 40° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 20W / 28W / 36W |
| Lumen | : 2420 lm / 3330 lm / 4175 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing



Photometric Data



Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |

Dimensions (mm)

YV

| Ø | h |
|-----|-----|
| 140 | 160 |

Ceiling Cut-Out Dimensions

| |
|-------|
| Ø 124 |
|-------|

KR

| a | b | h |
|-----|-----|-----|
| 137 | 137 | 160 |

Ceiling Cut-Out Dimensions

| |
|-----------|
| 124 x 124 |
|-----------|





SPOT LIGHTING LUMINAIRES




“Designed according to the latest trends, S-NAIL is ideal for lighting objects, walls, paintings etc. with its aesthetic body designs and spot mechanism. It stands out with its optical diversity and different lumen values. It can be used effectively in sloping ceiling applications thanks to its steerability.”


Technical Specifications

| | |
|-------------------|-----------------------------------|
| Housing | : Aluminium Injection Housing |
| Optic | |
| Mini | : 15° / 30° Reflector |
| Midi | : 15° / 30° / 45° Reflector |
| Maxi | : 15° / 30° / 45° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | |
| Mini | : 8W / 10W |
| Midi | : 20W / 30W |
| Maxi | : 20W / 30W |
| Lumen | |
| Mini | : 724 lm / 906 lm |
| Midi | : 2017 lm / 3026 lm |
| Maxi | : 2017 lm / 3026 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Recessed mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

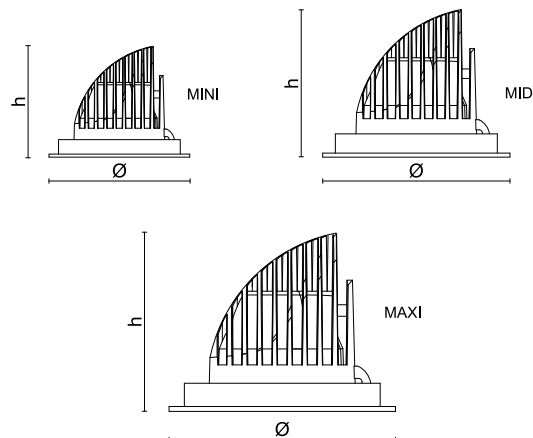

Photometric Data



Dimensions (mm)

| S-NAIL Mini | | S-NAIL Midi | | S-NAIL Maxi | |
|----------------------------|----|----------------------------|-----|----------------------------|-----|
| Ø | h | Ø | h | Ø | h |
| 115 | 85 | 153 | 125 | 185 | 146 |
| Ceiling Cut-Out Dimensions | | Ceiling Cut-Out Dimensions | | Ceiling Cut-Out Dimensions | |
| Ø 100 | | Ø 145 | | Ø 170 | |

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |

VENO Surface Mounted IP20 / IP65



SPOT LIGHTING LUMINAIRES




“VENO is designed based on a cylinder form. It has a simple design and decorative character. VENO allows rhythmic and creative templates to be created during the application phase of projects. Designed according to different height measurements, VENO creates a new atmosphere in architectural spaces by providing its decorative contribution to concept projects.”


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Housing |
| Optic | : 24° / 36° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 6W / 8W / 10W / 12W / 15W |
| Lumen | |
| IP20 | : 636 lm / 848 lm / 1060 lm / 1272 lm / 1485 lm |
| IP65 | : 600 lm / 800 lm / 1000 lm / 1200 lm / 1400 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 / IP65 |
| Mounting Type | : Surface mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

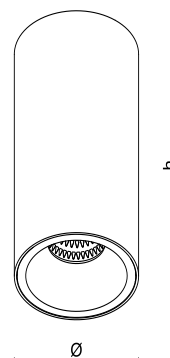

Photometric Data



Dimensions (mm)

| | Ø | h |
|----------|-----|-----|
| Veno 180 | 100 | 180 |
| Veno 240 | 100 | 240 |
| Veno 425 | 100 | 425 |

IP65

| | Ø | h |
|----------|----|-----|
| Veno 220 | 70 | 220 |

Options

| | |
|--------------------|-----------------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| CRI | : > 90 |
| Optic | : Opal Diffuser |





SPOT LIGHTING LUMINAIRES



Designed in two configurations, round and square, LUP adds an elegant atmosphere to your spaces by addressing a wide range of uses from hotels to offices, hospitals to residences. It provides the right light distribution by combining multiple power, light color, angle and control combinations with alternatives suitable for different areas. Its lenses can be easily replaced where it is mounted according to the required light angle.


Technical Specifications

| | |
|-------------------|----------------------------------|
| Housing | : Aluminium Housing |
| Optic | : 24° / 36° / 60° Lens |
| Light Source | : COB LED |
| Power Consumption | : 8 W / 10W / 15W |
| Lumen | : 838 lm / 1028 lm / 1411 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Surface mounted |
| Housing Colour | : RAL 9005 / RAL 9016 / RAL 7016 |


Technical Drawing

KR

YV

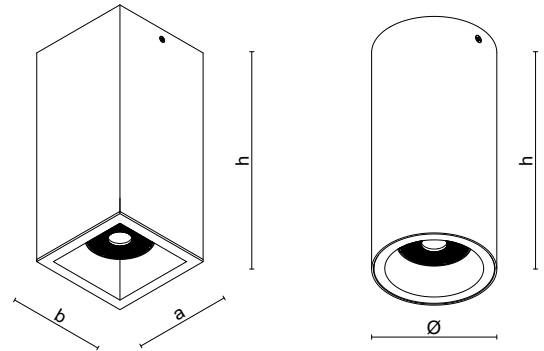

Photometric Data



Dimensions (mm)

| KR | YV | h | Standard Driver | DALI |
|---------|------|-----|-----------------|------|
| 80 x 80 | Ø 85 | 120 | Yes | None |
| | | 180 | Yes | Yes |
| | | 240 | Yes | Yes |
| | | 300 | Yes | Yes |

Options

| | |
|--------------------|---------------------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes (except h120) |
| CRI | : > 90 |

ART Adjustable Surface Mounted



SPOT LIGHTING LUMINAIRES





“ART, which has a modern and stylish design with its aesthetically pleasing square-shaped housing, is an economical surface-mounted luminaire. ART, which has an orientable body, can be redirected towards the desired location as needed.”

Technical Specifications


| | |
|-------------------|---|
| Housing | : Aluminium Housing |
| Optic | : 24° / 36° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 6W / 8W / 10W / 12W / 15W |
| Lumen | : 612lm / 800lm / 995lm / 1164lm / 1344lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Surface mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

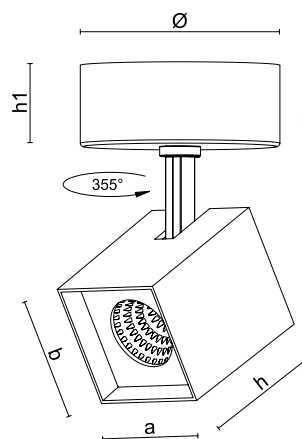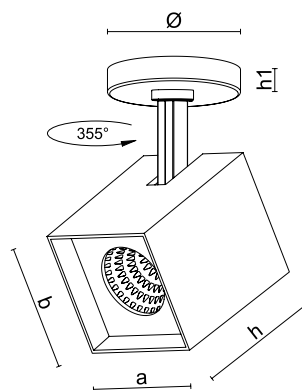

DALI DRIVER COMPATIBLE
CEILING CAP

Photometric Data




Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| CRI | : > 90 |

Dimensions (mm)

| | a x b | Ø | h | h1 |
|----------|-------|-----|-----|----|
| Standart | 80x80 | 80 | 100 | 20 |
| DALI | 80x80 | 120 | 100 | 50 |





SPOT LIGHTING LUMINAIRES




“ART is an economical recessed mounted luminaire with a modern and stylish design with its aesthetically pleasing square-shaped case. It is robust and durable thanks to its aluminum body. ART, which can be offered with different color temperature options, provides lighting at the desired intensity thanks to its dimmable feature.”


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Housing |
| Optic | : 24° / 36° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 6W / 8W / 10W / 12W / 15W |
| Lumen | : 612lm / 800lm / 995lm / 1164lm / 1344lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Surface mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

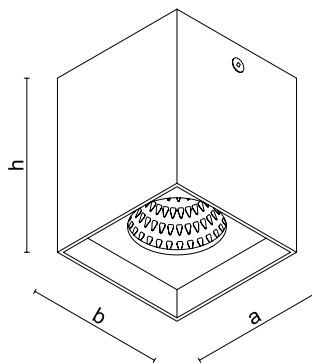

Photometric Data



Dimensions (mm)

| a | b | h |
|----|----|-----|
| 80 | 80 | 100 |

Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : None |
| CRI | : > 90 |



LED LIGHTING LUMINAIRES




“ORION, which stands out with its new generation and user-friendly LED infrastructure, is ideal for illuminating areas such as stairwells, corridors, technical volumes, warehouses, etc. ORION, which is in IP66 protection class, can be used reliably in humid volumes. In addition to its elegant appearance with its simple design, it achieves a more homogeneous illumination by softening the sharp light output with its opal diffuser.”


Technical Specifications

| | |
|-------------------|-------------------------|
| Housing | : Polycarbonate Body |
| Optic | : Opal Diffuser |
| Light Source | : Mid Power LED |
| Power Consumption | : 18W |
| Lumen | : 2100 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP66 |
| Mounting Type | : Surface mounted |

Technical Drawing

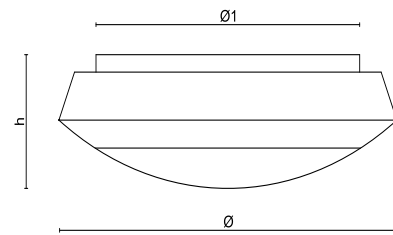

Photometric Data



Dimensions (mm)

| Ø | h | Ø1 |
|-----|-----|-----|
| 350 | 118 | 260 |

Options

| | |
|--------------------|-----------------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |
| Sensor | : Yes (Scanning area 4x4 m) |



LED LIGHTING LUMINAIRES




SATURN is a timeless lighting design that provides the user with functional usage possibilities with its minimal design. With its LED light source with 16W power consumption, it is both energy efficient and can adapt to any project where an economic solution is needed. Motion sensor and emergency kits can be preferred according to the user's request. Ideal for illuminating areas such as stairwells, corridors, technical volumes, warehouses, etc.


Technical Specifications

| | |
|-------------------|-------------------------|
| Housing | : Aluminium housing |
| Optic | : Opal Diffuser |
| Light Source | : Mid Power LED |
| Power Consumption | : 16 W |
| Lumen | : 1549 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 3000K / 4000K / 5700K |
| CRI | : > 80 |
| IP | : IP65 |
| Mounting Type | : Surface mounted |
| Housing Colour | : RAL 9016 |

Technical Drawing

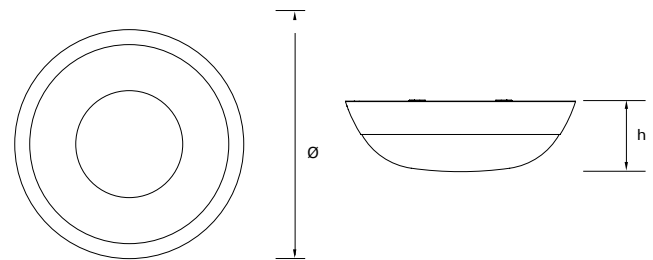

Photometric Data



Dimensions (mm)

| | Ø | h |
|------|-------|-----|
| 18 W | 327.5 | 103 |

Options

| | |
|--------------------|-----------------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |
| Sensor | : Yes (Scanning area 4x4 m) |

LEDBAR SLIM-60 / SLIM-120



LED LIGHTING LUMINAIRES



“


LEDBAR SLIM, the perfect choice for cove lighting applications, is available in 60 LEDs per meter and 120 LEDs per meter in different sizes. It has color temperature options such as warm light like 2700K or cooler 6500K.

”

Technical Specifications

| | |
|-------------------|--|
| Housing | : Aluminium Extrusion Housing |
| Optic | : Opal Polycarbonate Diffuser |
| Light Source | : SMD LED |
| Power Consumption | : 4W (30cm) / 6W (40cm) / 7W (50cm) / 9W (60cm) / 10W (70cm) / 12W (80cm) / 13W (90cm) / 15W (100cm) / 16W (110cm) / 17W (120cm) / 19W (130cm) / 20W (140cm) / 22W (150cm) |
| Lumen | : 300 lm / 450 lm / 525 lm / 675lm / 750lm / 900 lm / 975 lm / 1050 lm / 1200 lm / 1275 lm / 1425 lm / 1500 lm / 1650lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Cove |
| Housing Colour | : Eloxal |


Technical Drawing

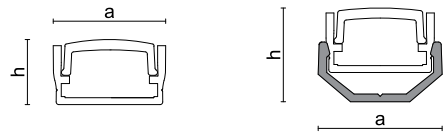

Without Mounting Bracket

With Mounting Bracket

Photometric Data



Dimensions (mm)

Without Mounting Bracket

| Length | a | h |
|--------|-----|----|
| 300 | 147 | 85 |
| 400 | 147 | 85 |
| 500 | 147 | 85 |
| 600 | 147 | 85 |
| 700 | 147 | 85 |
| 800 | 147 | 85 |
| 900 | 147 | 85 |
| 1000 | 147 | 85 |
| 1100 | 147 | 85 |
| 1200 | 147 | 85 |
| 1300 | 147 | 85 |
| 1400 | 147 | 85 |
| 1500 | 147 | 85 |

With Mounting Bracket


| Length | a | h |
|--------|-----|------|
| 300 | 162 | 1225 |
| 400 | 162 | 1225 |
| 500 | 162 | 1225 |
| 600 | 162 | 1225 |
| 700 | 162 | 1225 |
| 800 | 162 | 1225 |
| 900 | 162 | 1225 |
| 1000 | 162 | 1225 |
| 1100 | 162 | 1225 |
| 1200 | 162 | 1225 |
| 1300 | 162 | 1225 |
| 1400 | 162 | 1225 |
| 1500 | 162 | 1225 |

Options

| | |
|--------------------|------------------------------|
| Emergency Kit | : Yes (1-3 Hours) (External) |
| DALI Compatibility | : On/Off - DALI (External) |
| CRI | : > 90 |

Note : It shall be supplied with a power source for 5 meters to a single direction from a single point, and a maximum of 5 + 5 meters to double direction from a single point.

Maximum of 5 meters to single direction from a single point



Maximum of 5 + 5 meters to double direction from a single point



LED LIGHTING LUMINAIRES




FLEXBAR V.2 is a cove light LED lighting that gives interiors an effective and useful appearance. With its flexible structure, it provides ease of installation on variable surfaces and offers economy and long-lasting use thanks to its simple design. FLEXBAR, which has a modular structure, allows the number of modules to be increased or decreased and different lumen values can be obtained.


Technical Specifications

| | |
|-------------------|---|
| Housing | : Plastic Injection Housing |
| Optic | : Clear Diffuser |
| Light Source | : Mid Power LED |
| Power Consumption | : 3W / 4W / 5W / 6W / 7W / 8W / 9W / 10W / 12W / 15W |
| Lumen | : 436 lm / 545 lm / 654 lm / 763 lm / 872 lm / 981 lm / 1060 lm / 1484 lm / 1696 lm / 1908 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Cove |

Technical Drawing

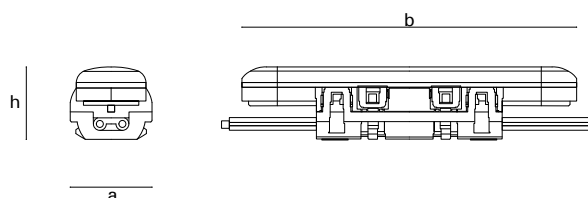

Photometric Data




Dimensions (mm)


| a | b | h |
|----|----|----|
| 23 | 92 | 21 |

Options

| | |
|-------------------|------------------------------|
| Emergency Kit | : Yes (1-3 Hours) (External) |
| Driver | : On/Off - DALI (External) |
| Optic | : Opal Diffuser |
| Body Lengths(m) | : 1m / 5m / 10m |
| Number of Modules | : 4 / 5 / 6 / 7 / 8 / 9 / 10 |




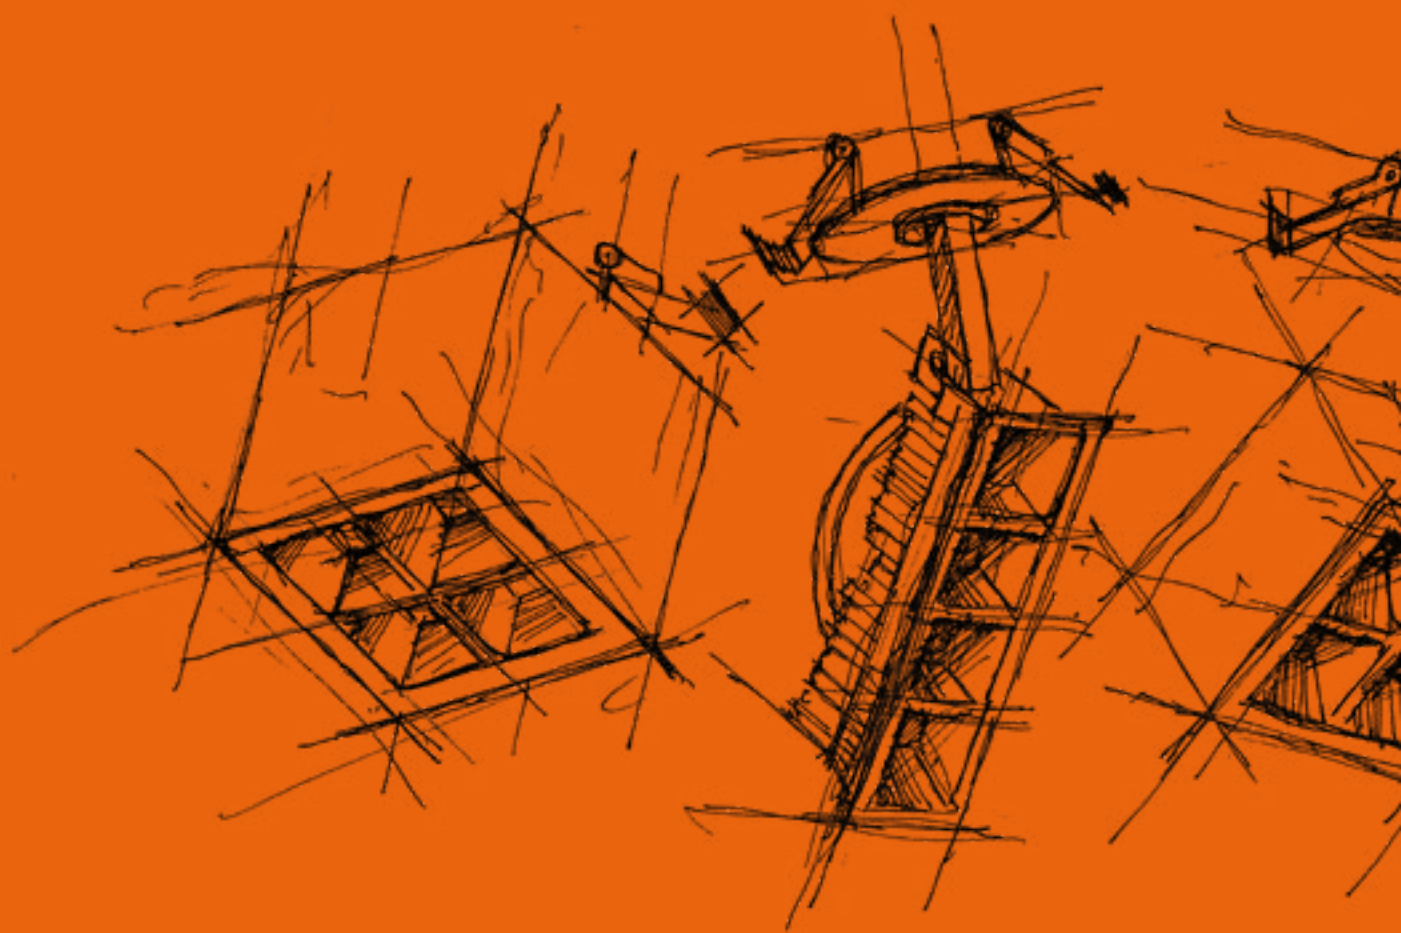

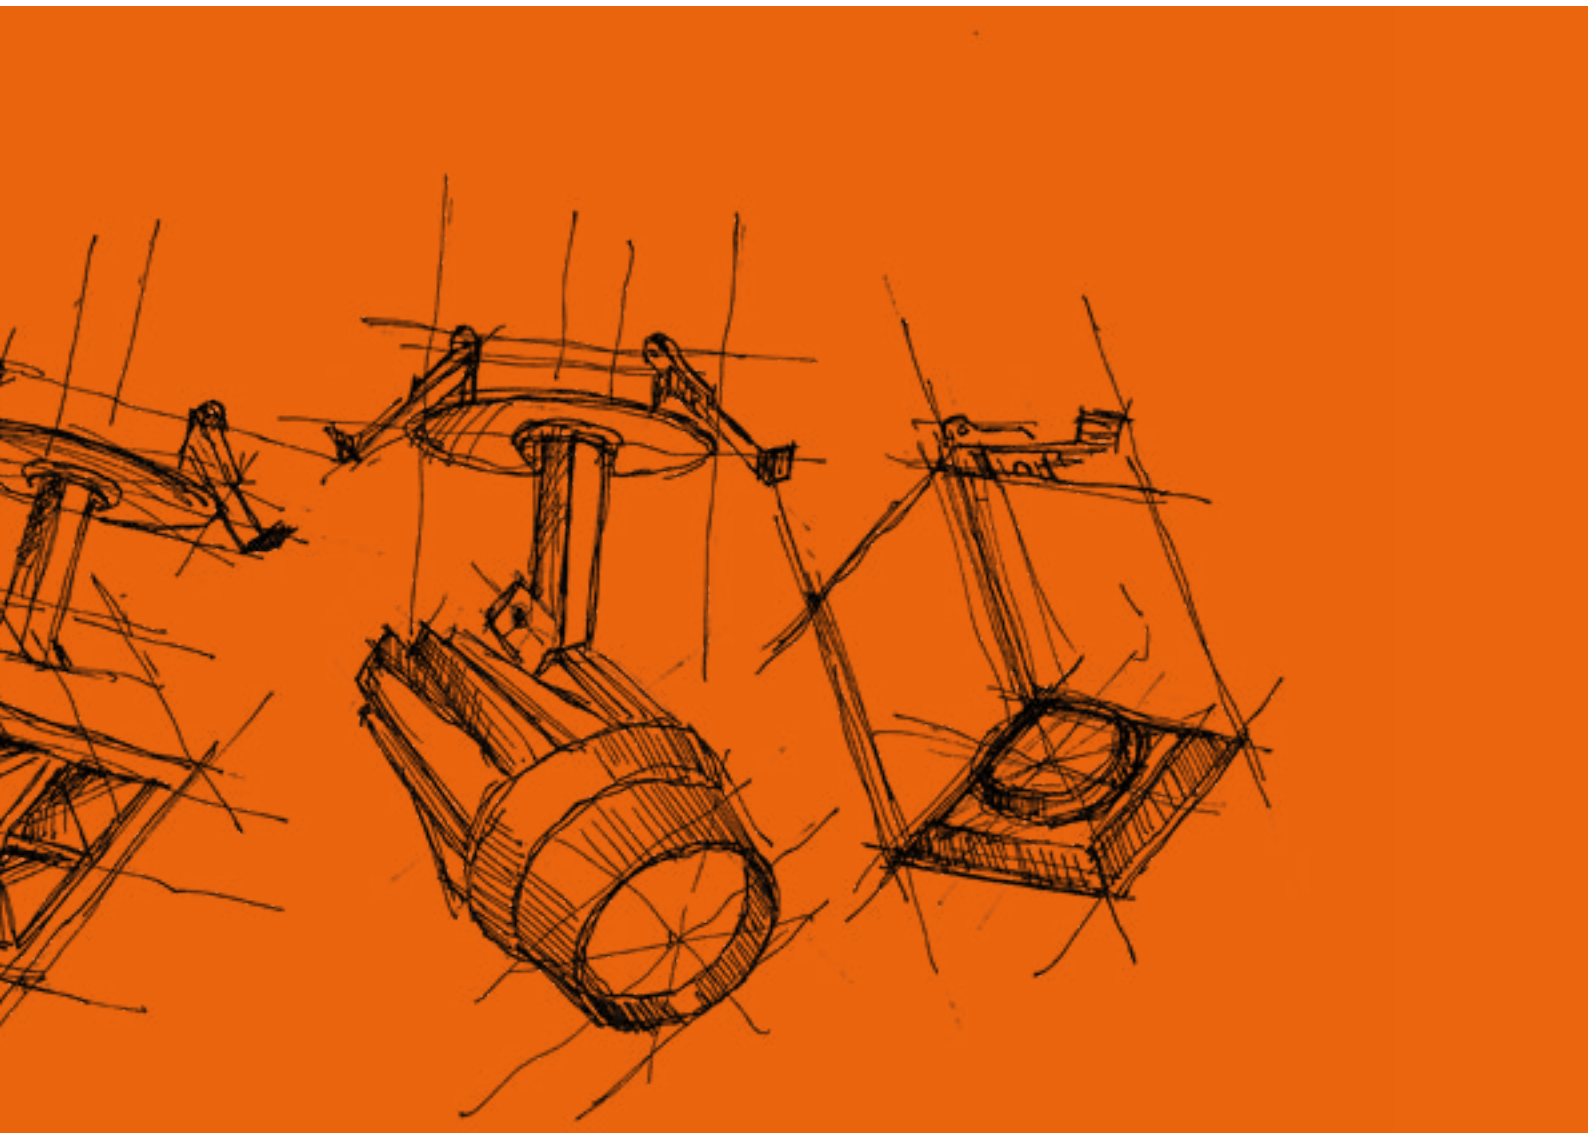

SEMI RECESSED MOUNTED
LUMINAIRES

Veno

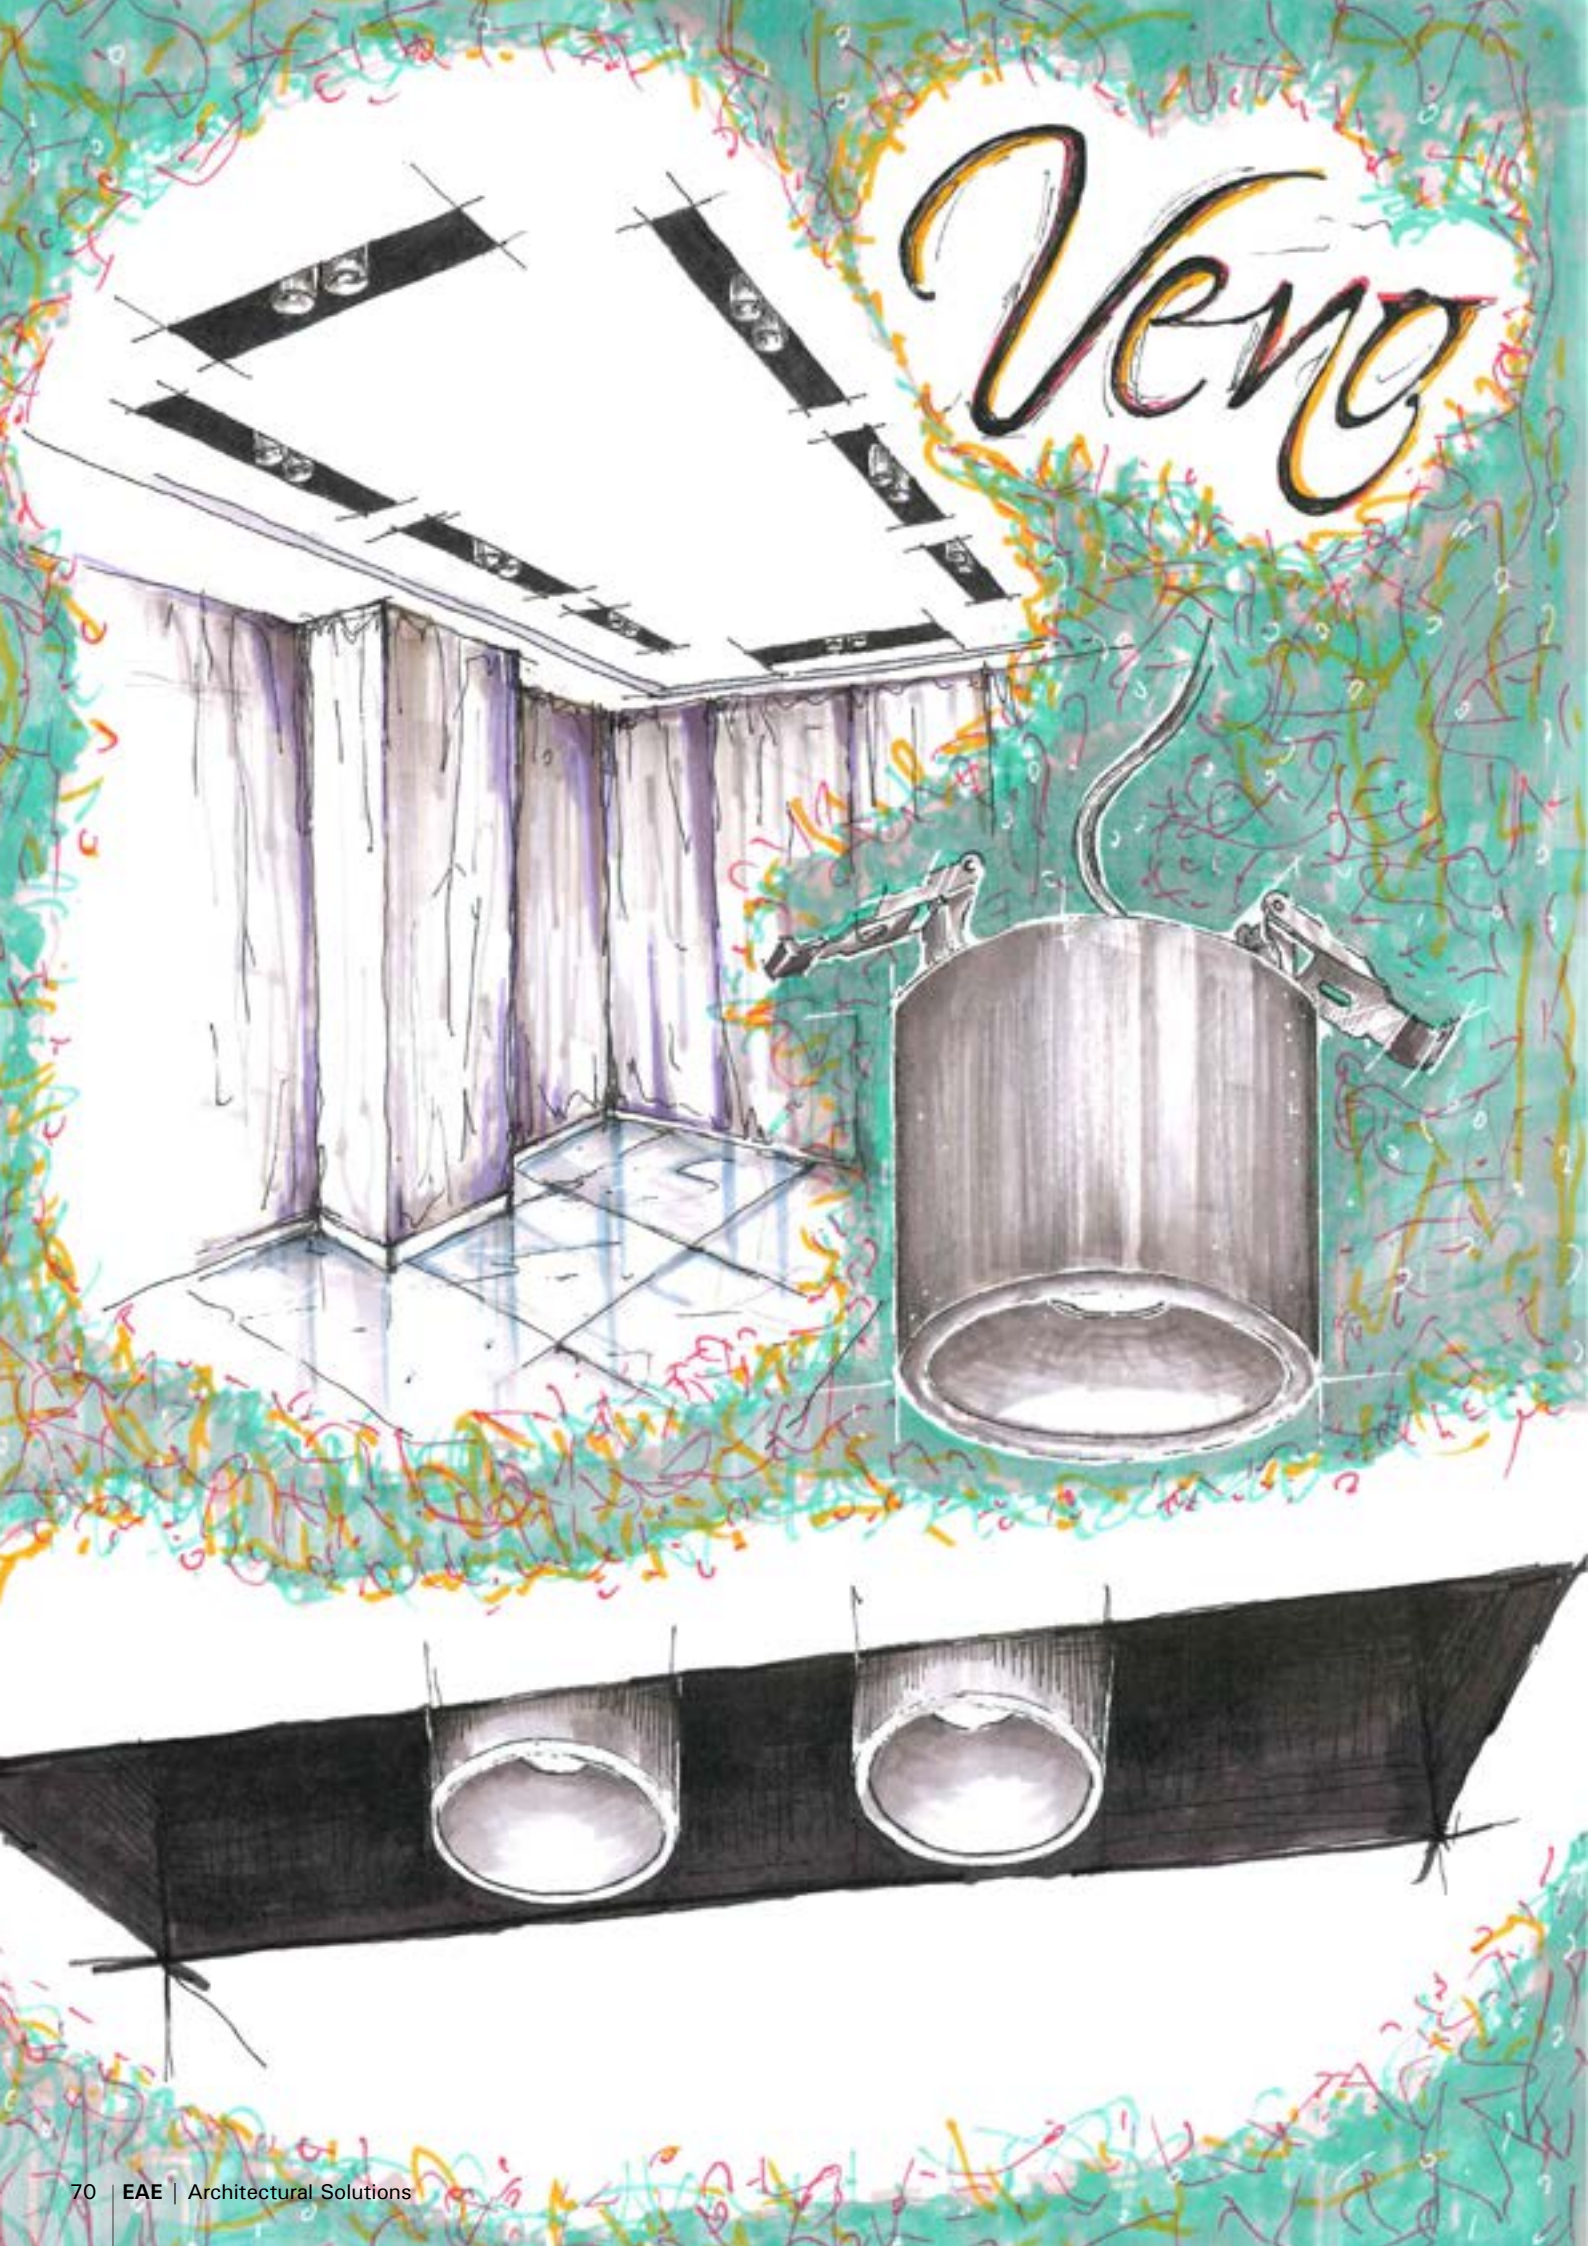

VENO V.2 Semi Recessed Mounted



SEMI-RECESSED MOUNTED SPOT LIGHTING LUMINAIRES




“VENO V.2 brings a stylish touch to your spaces with its cylindrical and minimal design. Thanks to its high luminous efficiency, it provides significant savings compared to conventional lighting. The reflector and its surroundings can be colored separately upon request.”


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Housing |
| Optic | : 24° / 36° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 6W / 8W / 10W / 12W / 15W |
| Lumen | : 636 lm / 848 lm / 1060 lm / 1272 lm / 1485 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Semi-Recessed Mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing



Photometric Data



Dimensions (mm)

| Ø | h |
|-----|----|
| 100 | 90 |

Ceiling Cut-Out Dimensions

| |
|------|
| Ø 90 |
|------|

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |
| Optic | : Opal Diffuser |



BRICK SEMI-RECESSED MOUNTED



SEMI-RECESSED MOUNTED SPOT LIGHTING LUMINAIRES




“With its high performance as well as functionality in different project areas, BRICK has an aesthetic design with its semi-recessed, square form and minimalist body. It captures clear light output thanks to its deeply positioned LED light source.”


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Injection Housing |
| Optic | : 24° / 36° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 6W / 8W / 10W / 12W / 15W |
| Lumen | : 692 lm / 866 lm / 1099 lm / 1195 lm / 1370 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Semi-Recessed Mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

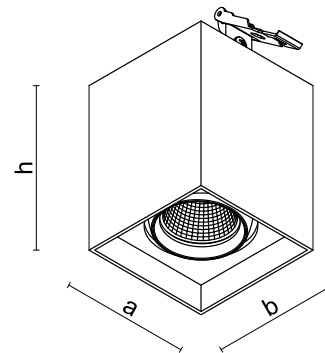

Photometric Data



Dimensions (mm)

| a | b | h |
|----|----|-----|
| 80 | 80 | 100 |

Ceiling Cut-Out Dimensions

| |
|------|
| Ø 68 |
|------|

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |



GIZA SEMI-RECESSED MOUNTED



SEMI-RECESSED MOUNTED SPOT LIGHTING LUMINAIRES




GIZA is used to illuminate interiors with its aesthetic design in square form. With its various lumen options and 50° and 80° optics, it easily meets the local and general lighting needs of your living spaces. With its deeply positioned reflector structure, it guarantees comfortable lighting without creating glare.


Technical Specifications

| | |
|-------------------|--|
| Housing | : Aluminium Injection Housing |
| Optic | : 50° / 80° Lens + Reflector (Black) |
| Light Source | : SMD LED |
| Power Consumption | : 8W / 10W / 12W / 15W / 20W / 24W / 28W |
| Lumen | : 894 lm / 1076 lm / 1209 lm / 1376 lm / 2200 lm / 2539 lm / 2963 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Semi-Recessed Mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing



Photometric Data



Dimensions (mm)

| a | b | h |
|-----|-----|-----|
| 105 | 105 | 100 |

Ceiling Cut-Out Dimensions

| |
|------|
| Ø 89 |
|------|

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |



GIZA SLIM Adjustable SEMI-RECESSED MOUNTED



SEMI-RECESSED MOUNTED SPOT LIGHTING LUMINAIRES




“With its minimal design, GIZA is a stylish architectural lighting solution. GIZA is ideal for illuminating spaces such as retail stores, museums and exhibition halls. Thanks to its deeply positioned reflector structure, it promises comfortable lighting without creating glare.”


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Injection Housing |
| Optic | : 50° / 80° Reflector |
| Light Source | : SMD LED |
| Power Consumption | : 8W / 10W / 12W / 15W / 20W / 24W / 28W |
| Lumen | : 894 lm / 1076 lm / 1209 lm / 1376 lm / 2200 lm / 2539 lm / 2963 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Semi-Recessed Mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

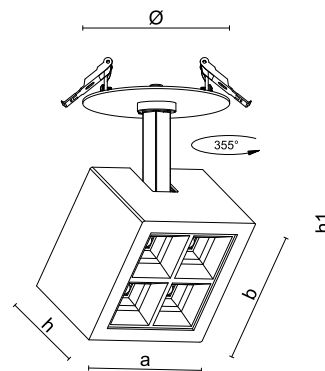

Photometric Data



Dimensions (mm)

| a | b | h | h1 | Ø |
|-----|-----|----|-----|----|
| 105 | 105 | 70 | 173 | 90 |

Ceiling Cut-Out Dimensions

| |
|------|
| Ø 76 |
|------|

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |



STORM SLIM Adjustable SEMI-RECESSED MOUNTED



SEMI-RECESSED MOUNTED SPOT LIGHTING LUMINAIRES




STORM semi-recessed, meets the needs of retail and exhibition areas to the maximum. Available in various lumen and optical options, STORM is ideal for accent lighting.




Technical Specifications

| | |
|-------------------|----------------------------------|
| Housing | : Aluminium Injection Housing |
| Optic | : 24° / 40° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 20W / 28W / 36W |
| Lumen | : 2420 lm / 3330 lm / 4176 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Semi-Recessed Mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

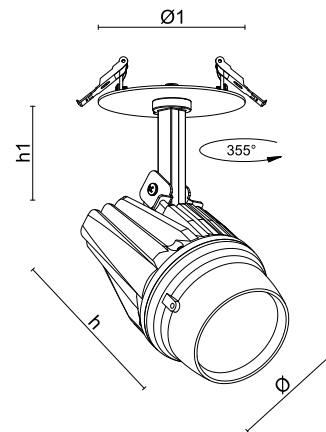

Photometric Data



Dimensions (mm)

| h | h1 | Ø | Ø1 |
|-----|----|----|----|
| 138 | 48 | 90 | 90 |

Ceiling Cut-Out Dimensions

| |
|------|
| Ø 76 |
|------|

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |



GIZA L4 Adjustable SEMI-RECESSED MOUNTED Dikey / Yatay



SEMI RECESSED MOUNTED SPOT LIGHTING LUMINAIRES





GIZA L4 is a minimally designed architectural lighting solution for illuminating different interior spaces with its horizontal and vertical semi-recessed design. GIZA L4 is used to illuminate interior spaces such as retail stores, museums and exhibition halls. With its deep reflector structure, it provides homogeneous illumination without creating glare. It provides 50° and 80° light distribution thanks to its highly efficient special optical lenses.


Technical Specifications

| | |
|-------------------|--|
| Housing | : Aluminium Injection Housing |
| Optic | : 50° / 80° Lens + Reflector (Black) |
| Light Source | : SMD LED |
| Power Consumption | : 8W / 10W / 12W / 15W |
| Lumen | : 894 lm / 1076 lm / 1209 lm / 1376 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Semi-Recessed Mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

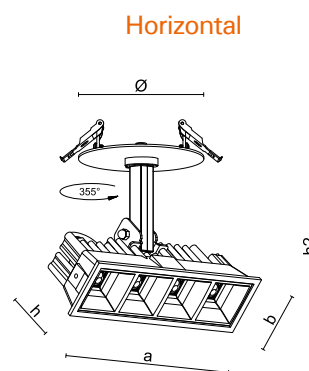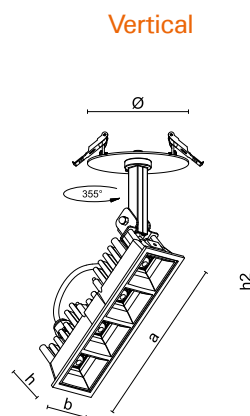

Photometric Data



Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |

Dimensions (mm)

Vertical

| a | b | h | Ø | h2 |
|-----|----|----|----|-----|
| 170 | 50 | 52 | 90 | 238 |

Ceiling Cut-Out Dimensions

Ø 76

Horizontal

| a | b | h | Ø | h2 |
|-----|----|----|----|-----|
| 170 | 50 | 52 | 90 | 118 |

Ceiling Cut-Out Dimensions

Ø 76





SEMI RECESSED MOUNTED SPOT LIGHTING LUMINAIRES




LUP semi-recessed has a wide usage area from hotels to offices, hospitals to residences. In addition to providing ease of application in narrow ceiling depths by providing advantages with its minimal installation height, its lenses can be changed where it is mounted according to the required light angle. In this context, it is the ideal choice for accent lighting. Thanks to its semi-submersible, deeply positioned light; LUP does not create glare, reduces unwanted shadows and increases visual comfort.


Technical Specifications

| | |
|-------------------|----------------------------------|
| Housing | : Aluminium Housing |
| Optic | : 24° / 36° / 60° Lens |
| Light Source | : COB LED |
| Power Consumption | : 8W / 10W / 15W |
| Lumen | : 838 lm / 1028 lm / 1411 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 4000K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Semi-Recessed Mounted |
| Housing Colour | : RAL 9005 / RAL 9016 / RAL 7016 |

Technical Drawing



Photometric Data



Dimensions (mm)

| Ø | h | h1 |
|----|----|----|
| 85 | 85 | 41 |

Ceiling Cut-Out Dimensions

| |
|------|
| Ø 73 |
|------|

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |

ART Adjustable SEMI-RECESSED MOUNTED



SPOT LIGHTING LUMINAIRES




ART, which has a modern and stylish design with its aesthetic-looking square-shaped case, is an economical semi-recessed luminaire. It is robust and durable thanks to its aluminum body. ART, which has a steerable body, can be directed towards the desired location as needed.




Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Housing |
| Optic | : 24° / 36° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 6W / 8W / 10W / 12W / 15W |
| Lumen | : 612lm / 800lm / 995lm / 1164lm / 1344lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Semi-Recessed Mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

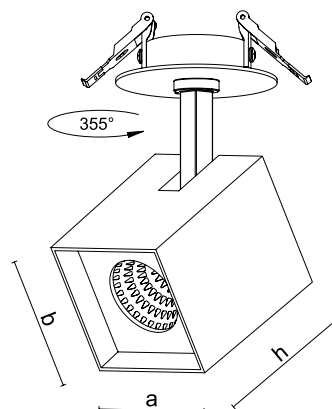

Photometric Data



Dimensions (mm)

| a | b | h |
|----|----|-----|
| 80 | 80 | 100 |

Ceiling Cut-Out Dimensions

| |
|------|
| Ø 76 |
|------|

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |





SPOT LIGHTING LUMINAIRES




“ART, which has a modern and stylish design with its aesthetically pleasing square-shaped case, is an economical semi-recessed luminaire. It is robust and durable thanks to its aluminum body. ART, which can be offered with different color temperature options, provides lighting at the desired intensity thanks to its dimmable feature.”


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Housing |
| Optic | : 24° / 36° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 6W / 8W / 10W / 12W / 15W |
| Lumen | : 612lm / 800lm / 995lm / 1164lm / 1344lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Semi-Recessed Mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing



Photometric Data



Dimensions (mm)


| a | b | h |
|----|----|-----|
| 80 | 80 | 100 |


Ceiling Cut-Out Dimensions

| |
|------|
| Ø 68 |
|------|


Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |

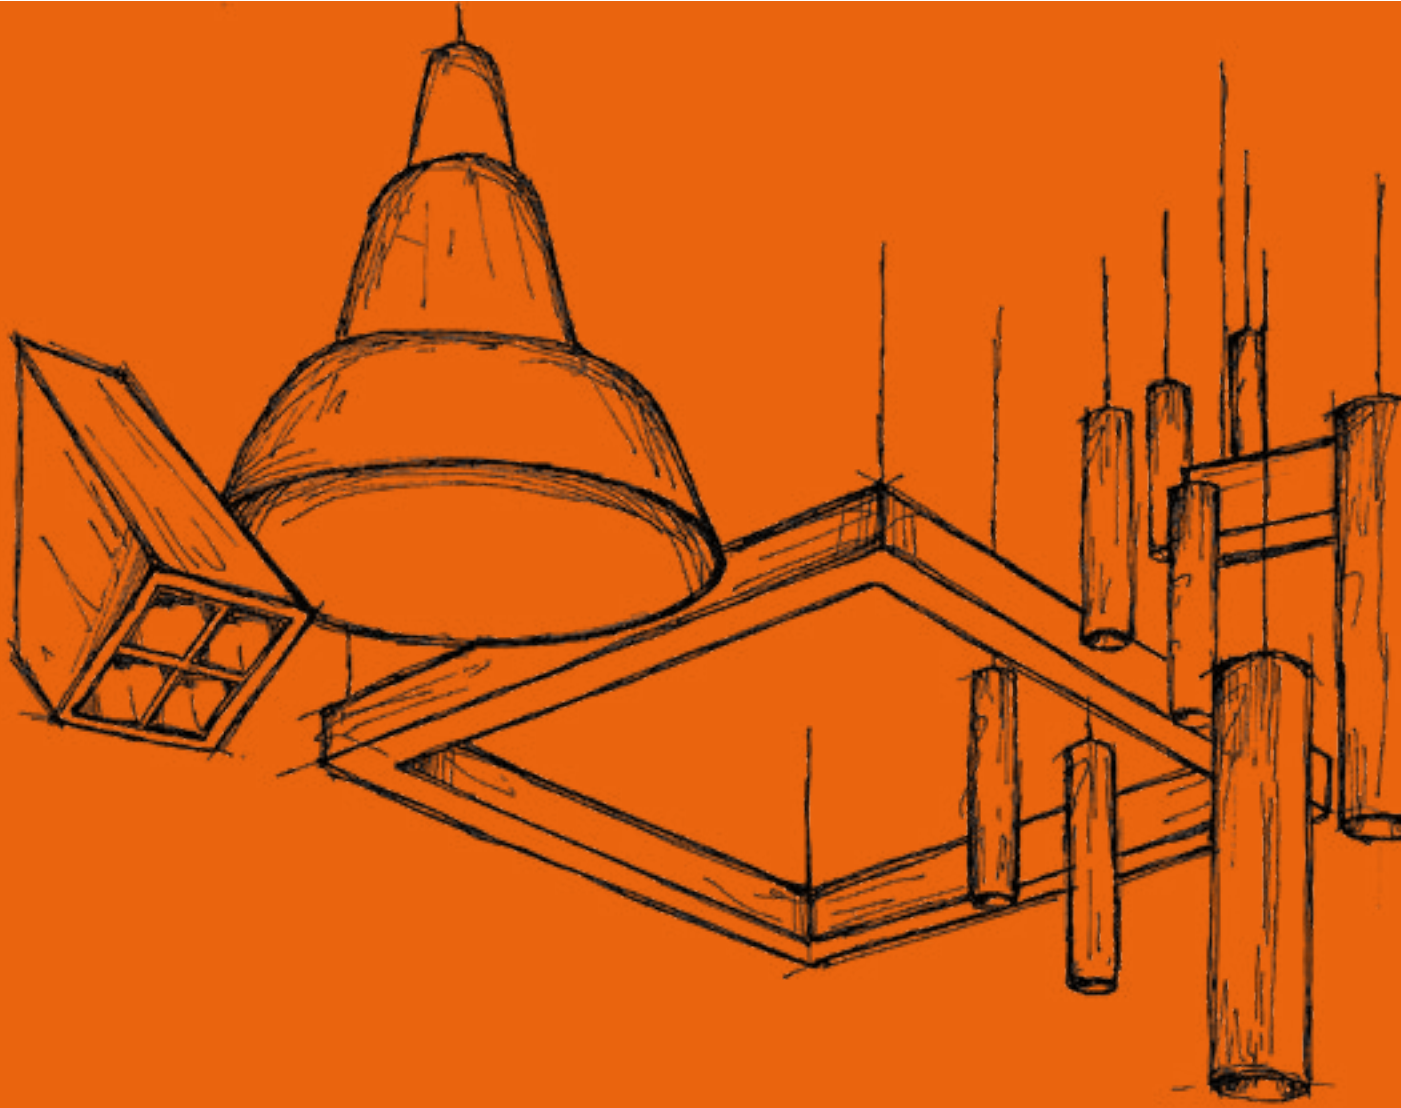

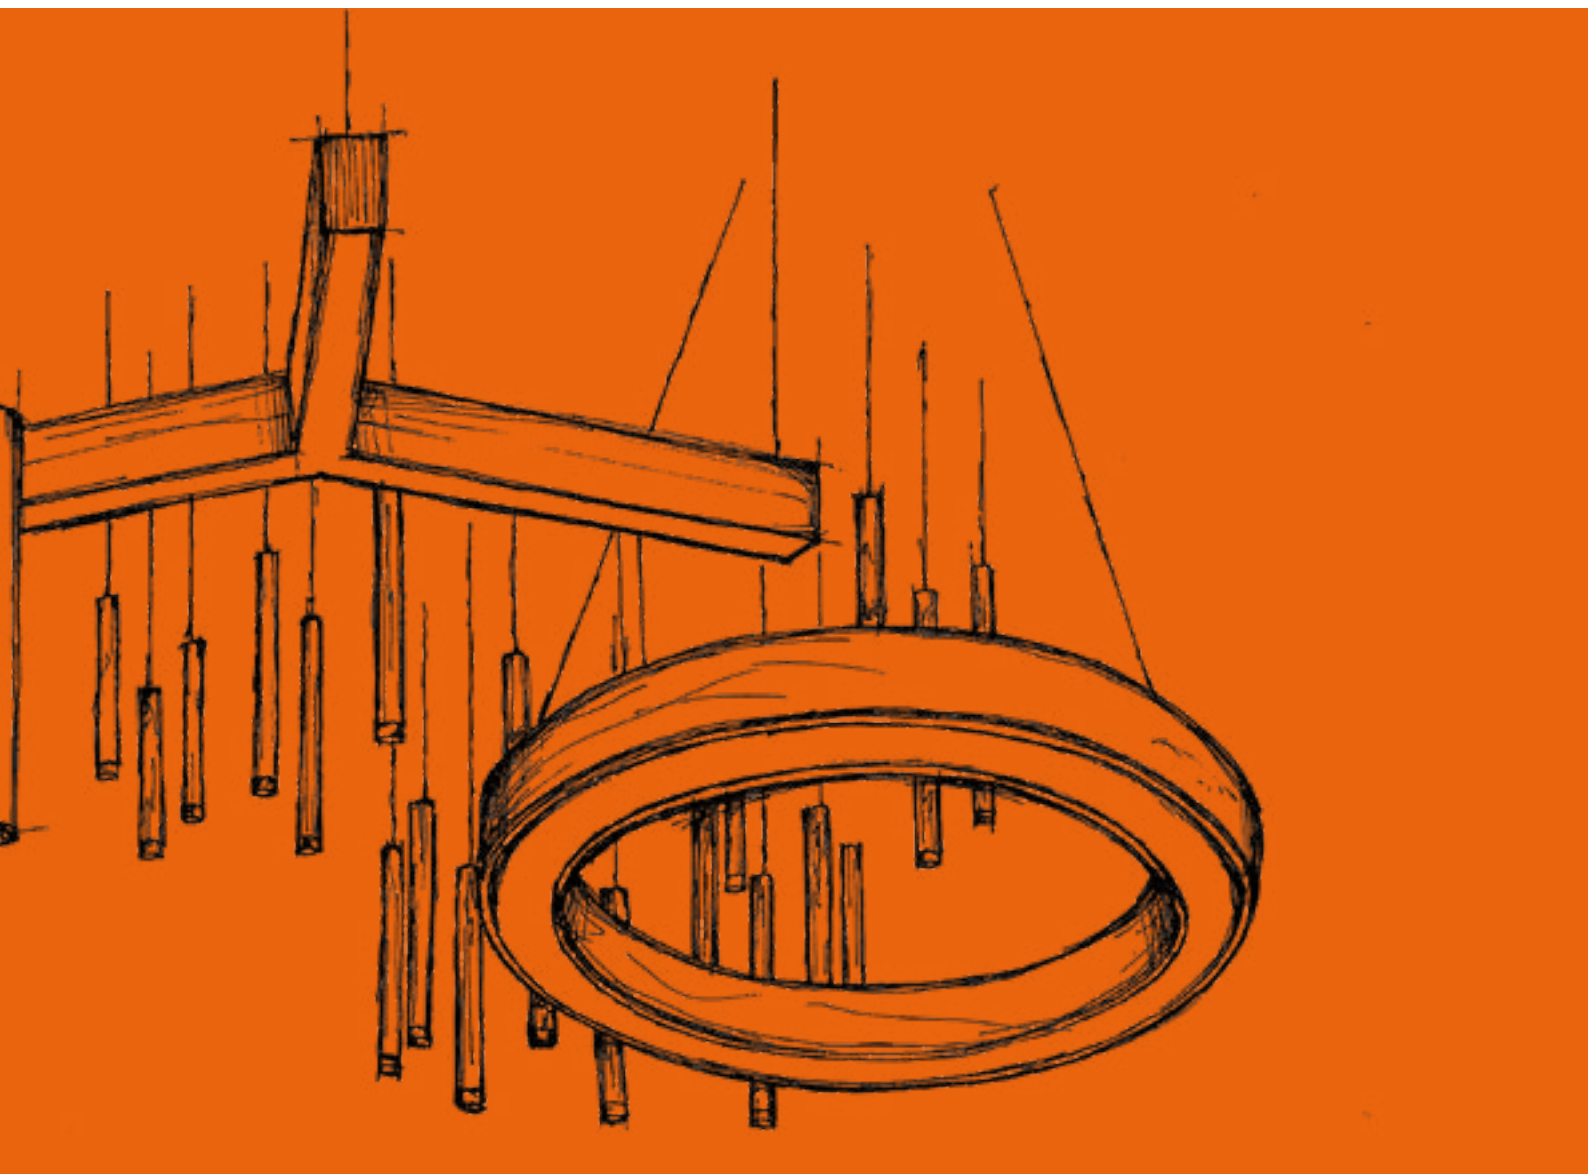

SURFACE MOUNTED PENDANT
LUMINAIRES

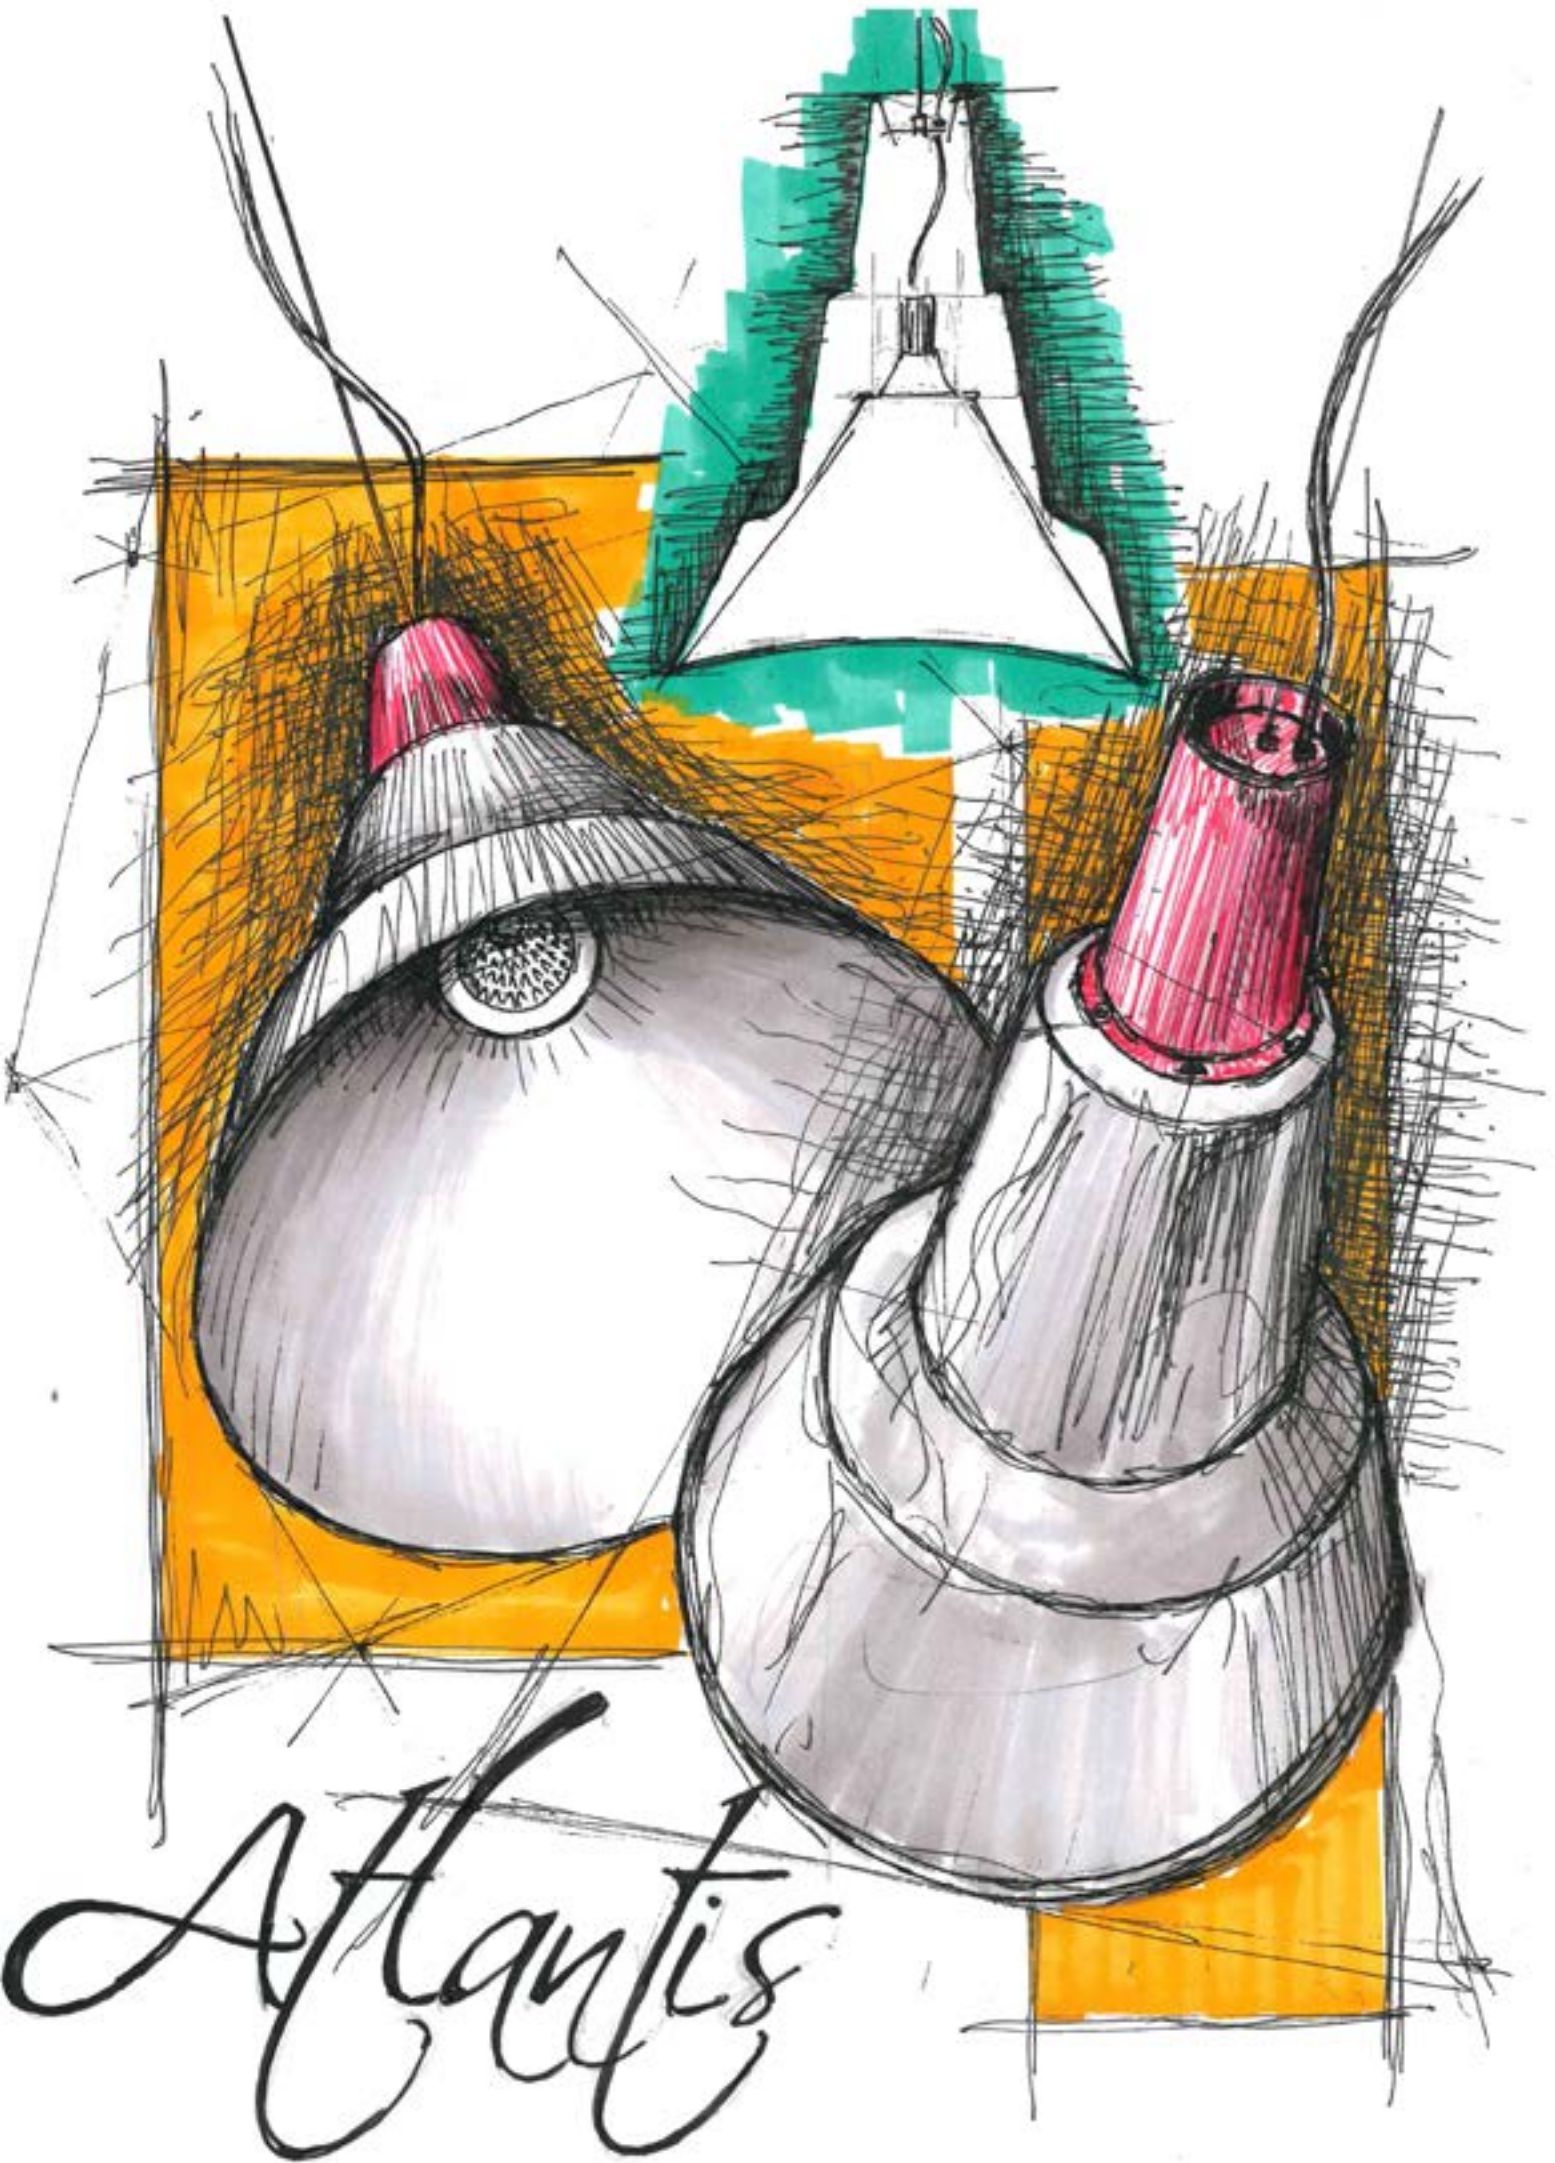

ATLANTIS MAXI / MIDI



SURFACE MOUNTED PENDANT LUMINAIRES




“ ATLANTIS comes in MAXI and MIDI body options. Adding a style to the ambiance with its retro-looking body ATLANTIS is a complement to modern spaces. Thanks to its deeply positioned light source, it creates no glare and provides a homogeneous illumination. The customizable parts of ATLANTIS allow you to change the interior and exterior colors of the product. ”

Technical Specifications


| | |
|-------------------|----------------------------------|
| Housing | : Aluminium Housing |
| Optic | : 24° / 40° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 20W / 28W / 36W |
| Lumen | : 2420 lm / 3330 lm / 4176 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Pendant |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing


Maxi

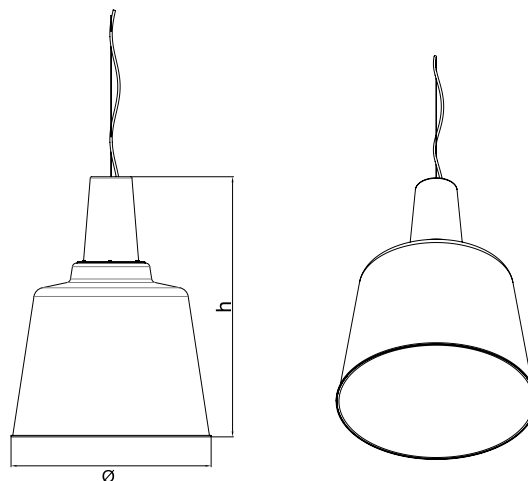

Midi

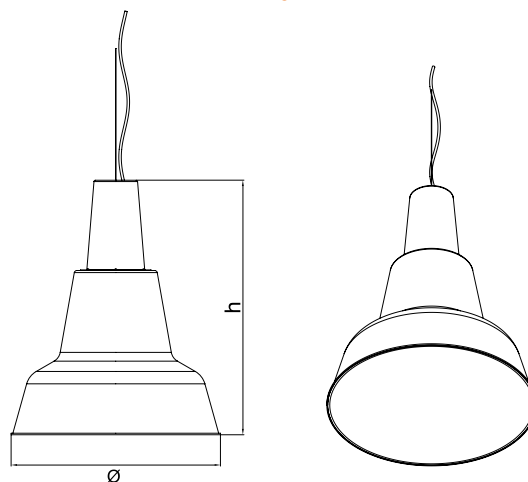

Photometric Data



Options

| | |
|--------------------|--|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| CRI | : > 90 |
| Optic | : Opal diffuser |
| Housing Colour | : Internal body / External body / Shade may be selected in different colours |

Dimensions (mm)

Maxi

| Ø | h |
|-----|-----|
| 505 | 660 |

Midi

| Ø | h |
|-----|-----|
| 505 | 660 |





SURFACE MOUNTED PENDANT LUMINAIRES




“The smallest member of the ATLANTIS product family, ATLANTIS MINI provides comfortable lighting thanks to its deeply positioned light source and lensed optical structure. Developed with LED technology, ATLANTIS MINI provides maximum energy savings, enabling both functional and aesthetically pleasing lighting.”


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Housing |
| Optic | : 24° / 36° / 60° Lens |
| Light Source | : COB LED |
| Power Consumption | : 8W / 10W / 12W / 15W / 20W |
| Lumen | : 838lm / 1047lm / 1257lm / 1466lm / 2080lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Pendant |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

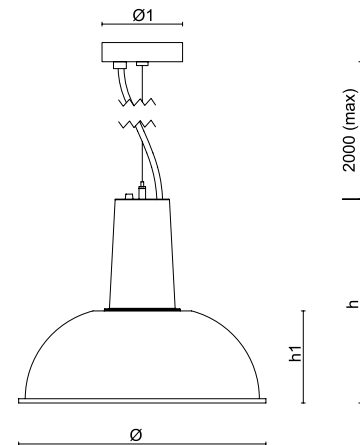

Photometric Data



Dimensions (mm)

| \varnothing | $\varnothing 1$ | h | h1 |
|---------------|-----------------|-----|-----|
| 376 | 80 | 310 | 140 |

Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| CRI | : > 90 |

VENO Pendant



SURFACE MOUNTED PENDANT LUMINAIRES




VENO is designed based on a cylinder form. It has a simple design and decorative character. When used as a pendant, it is ideal for general lighting. When used in rhythmic or creative patterns during the application phase, it becomes a complementary element of interior design. Designed with different body heights, VENO creates a new atmosphere in architectural spaces by providing its decorative contribution to concept projects.

Technical Specifications


| | |
|-------------------|---|
| Housing | : Aluminium Housing |
| Optic | : 24° / 36° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 6W / 8W / 10W / 12W / 15W |
| Lumen | : 636 lm / 848 lm / 1060 lm / 1272 lm / 1485 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Pendant |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

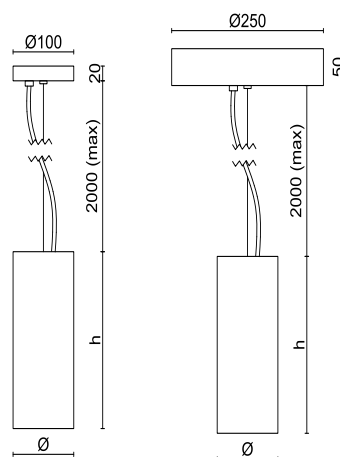

Emergency Kit

Photometric Data



Dimensions (mm)

| | Ø | h |
|----------|-----|-----|
| Veno 180 | 100 | 180 |
| Veno 240 | 100 | 240 |
| Veno 425 | 100 | 425 |

Options

| | |
|--------------------|---|
| Emergency Kit | : Yes (in the pendant model, inside the external cover) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |
| Optic | : Opal Diffuser |



SURFACE MOUNTED PENDANT LUMINAIRES




“LILI is a reinterpretation of a traditional candle with an elegant and functional LED light source emerging from a minimal body. It can be combined in single or multiple combinations as desired.”

Technical Specifications

- Housing : Extruded Aluminum Housing
- Optic : Transparent acrylic
- Light Source : COB LED
- Power Consumption : 3W / 5W / 6W
- Lumen : 250 lm / 420 lm / 506 lm
- Input Voltage : 220-240V AC 50/60Hz
- Color Temperature : 2700K / 3000K / 4000K / 6500K
- CRI : > 80
- IP : IP20
- Mounting Type : Pendant
- Housing Colour : RAL 9005 / RAL 9016


Technical Drawing

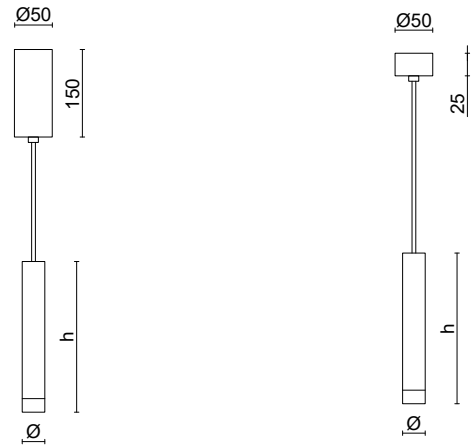

Technical drawing of the resealable cover for single use
NOTE: Single driver (Driver is inside the rözans cover.)


Technical drawing of the resence cover for multiple use

Photometric Data



Options

- Emergency Kit : None
- DALI Compatibility : Yes
- CRI : > 90
- Option : Badge (Ø150mm)

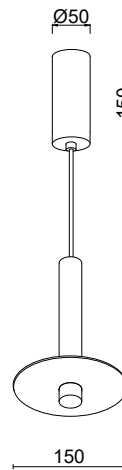


Rosette size technical drawing

Dimensions (mm)

| | Ø | h |
|----------|----|-----|
| Lili 100 | 30 | 100 |
| Lili 200 | 30 | 200 |
| Lili 300 | 30 | 300 |
| Lili 400 | 30 | 400 |
| Lili 500 | 30 | 400 |

| | Ø | h |
|----------------|----|-----|
| Lili Large 100 | 50 | 100 |
| Lili Large 200 | 50 | 200 |
| Lili Large 300 | 50 | 300 |
| Lili Large 400 | 50 | 400 |
| Lili Large 500 | 50 | 500 |

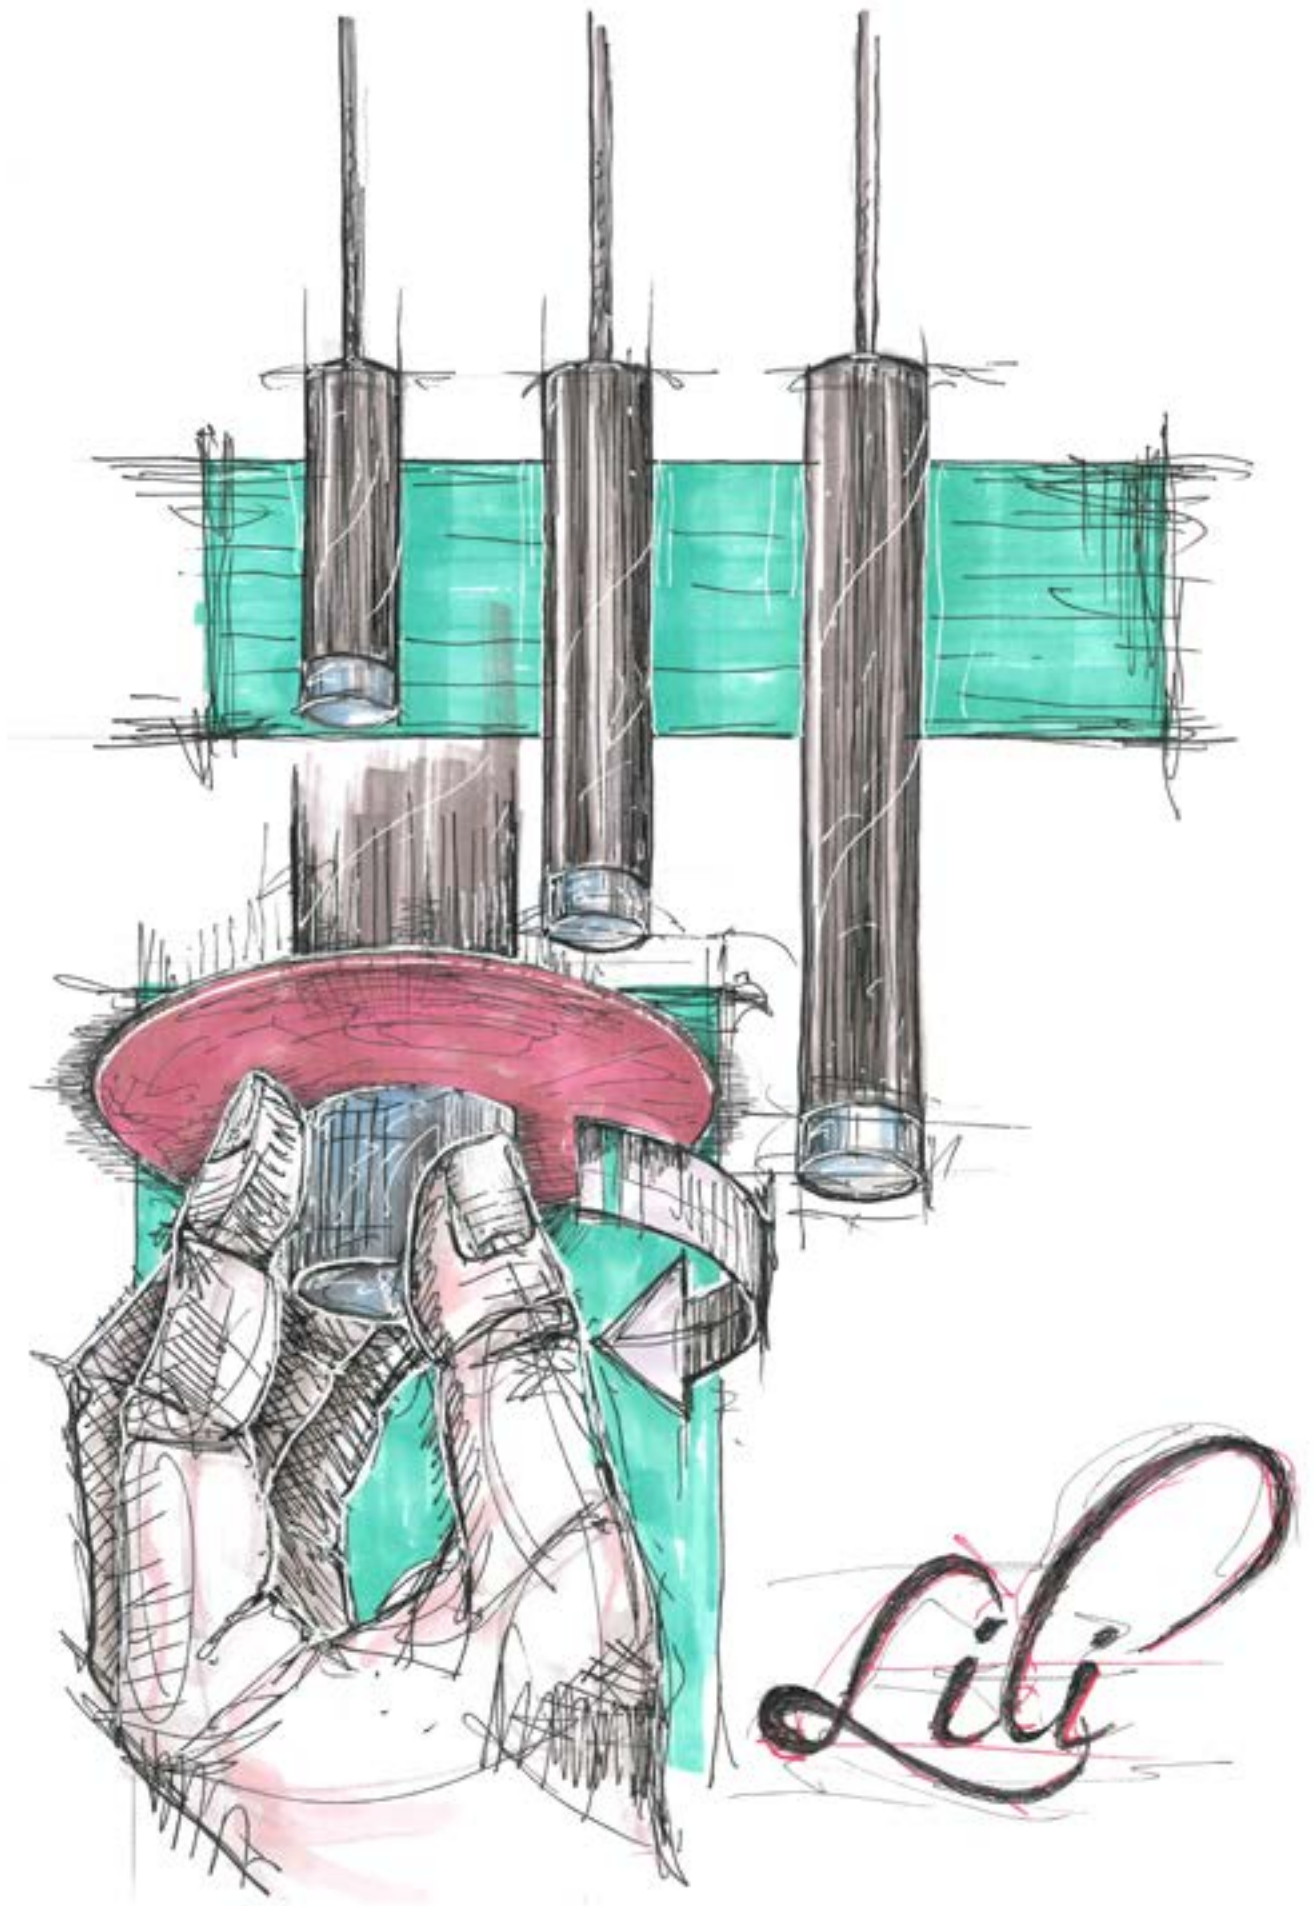

Lili

LUP YV / KR Pendant



SURFACE MOUNTED PENDANT LUMINAIRES




Designed in two configurations as round and square for use in architectural spaces, LUP adds an elegant atmosphere to your spaces by appealing to a wide range of uses from hotels, offices, hospitals to residences. It provides the right light distribution by combining with alternatives that enable multiple power, light color, angle and control combinations suitable for different areas. LUP, whose lenses can be easily changed where it is mounted according to the required light angle, captures clear light output and allows you to create an aesthetic appearance in your spaces.


Technical Specifications

| | |
|-------------------|----------------------------------|
| Housing | : Aluminum Housing |
| Optic | : 24° / 36° / 60° Lens |
| Light Source | : COB LED |
| Power Consumption | : 8W / 10W / 15W |
| Lumen | : 838 lm / 1028 lm / 1411 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Pendant |
| Housing Colour | : RAL 9005 / RAL 9016 / RAL 7016 |

Technical Drawing

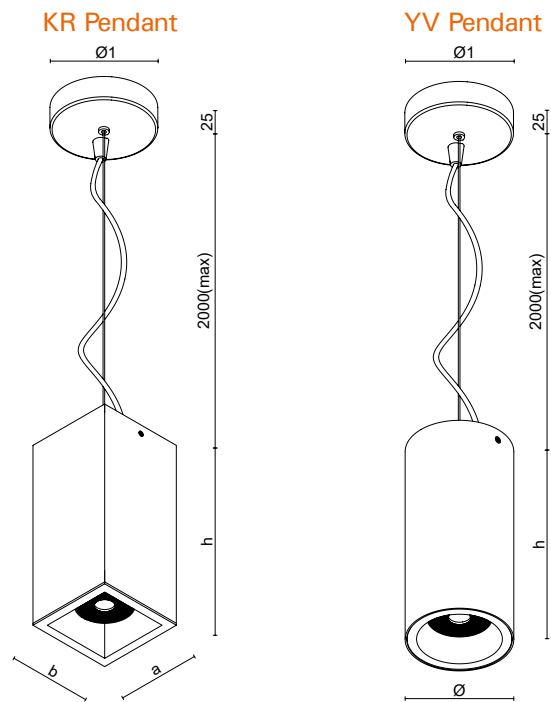

Photometric Data



Dimensions (mm)

| KR | YV | h | Standard Driver | DALI |
|---------|------|-----|-----------------|------|
| 80 x 80 | Ø 85 | 120 | Yes | None |
| | | 180 | Yes | Yes |
| | | 240 | Yes | Yes |
| | | 300 | Yes | Yes |

Options

| | |
|--------------------|---------------------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes (except h120) |
| CRI | : > 90 |



STL Frame Rectangular



SURFACE MOUNTED PENDANT LUMINAIRES




With its rectangular aesthetic and stylish design, STL FRAME brings its own dynamism to the spaces with its sharp lines. Thanks to its glare-controlled opal diffuser, it minimizes glare and provides homogeneous lighting.




Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Extrusion Body And Injected Cover |
| Optic | : Opal diffuser with glare control |
| Light Source | : Mid Power LED |
| Power Consumption | |
| 40x120 | : 64W / 96W |
| 60x120 | : 72W / 108W |
| 90x180 | : 108W / 162W |
| Lumen | |
| 40x120 | : 5070lm / 9303lm |
| 60x120 | : 5700lm / 10466lm |
| 90x180 | : 8550lm / 15700lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 3000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Pendant |
| Housing Colour | : RAL 9005 / RAL 7047 |

Technical Drawing

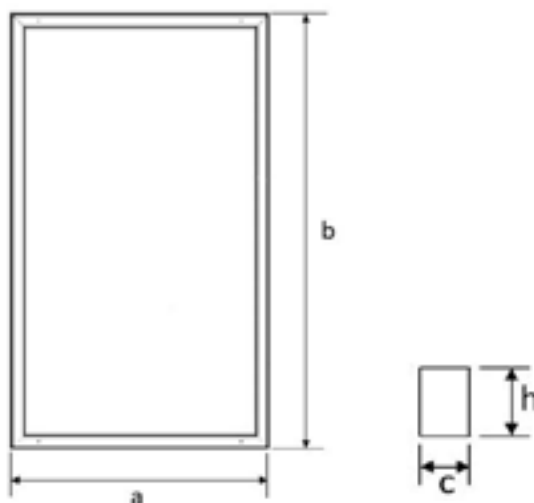

Photometric Data



Dimensions (mm)

| | a | b | c | h |
|-------------|-----|------|----|----|
| 64W / 96W | 400 | 1200 | 50 | 70 |
| 72W / 108W | 600 | 1200 | 50 | 70 |
| 108W / 162W | 900 | 1800 | 50 | 70 |

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |





STL Frame Square



SURFACE MOUNTED PENDANT LUMINAIRES




Inspired by the basic square geometry, STL FRAME brings its own dynamism to the spaces with its reduced light surface and sharp lines. It provides homogeneous light output thanks to its opal acrylic diffuser.




Technical Specifications

| | |
|-------------------|--|
| Housing | : Aluminium Extrusion Body |
| Optic | : High-opacity diffuser with glare control |
| Light Source | : Mid Power LED |
| Power Consumption | |
| 60x60 | : 64W / 96W |
| 90x90 | : 72W / 108W |
| 120x120 | : 96W / 144W |
| 150x150 | : 120W / 180W |
| 180x180 | : 144W / 216W |
| Lumen | |
| 60x60 | : 3801lm / 6977lm |
| 90x90 | : 5700lm / 10466lm |
| 120x120 | : 7602lm / 13955lm |
| 150x150 | : 9502lm / 17443lm |
| 180x180 | : 11403lm / 20932lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Pendant |
| Housing Colour | : RAL 9005 / RAL 7047 |

Technical Drawing

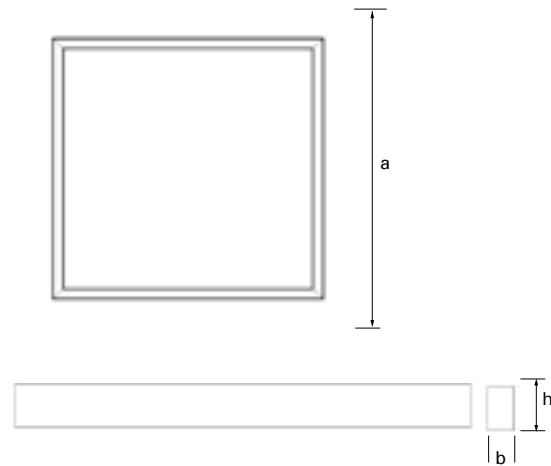

Photometric Data



Dimensions (mm)

| | a | b | h |
|---------------|------|----|----|
| 64 W / 96 W | 600 | 50 | 70 |
| 72 W / 108 W | 900 | 50 | 70 |
| 96 W / 144 W | 1200 | 50 | 70 |
| 120 W / 180 W | 1500 | 50 | 70 |
| 120 W / 180 W | 1800 | 50 | 70 |

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |






SURFACE MOUNTED PENDANT LUMINAIRES



With its ring-shaped geometry and minimal body with clean finishes, RINOVA takes its place as a complementary part of modern spaces. Thanks to its opal diffuser, it diffuses light homogeneously and guarantees eye-friendly illumination.




Technical Specifications*


| | |
|-------------------|---|
| Housing | : Electrostatic Powder Painted Aluminium Body |
| Optic | : Opal diffuser with glare control |
| Light Source | : Mid Power LED |
| Power Consumption | : 36W / 54W / 80W |
| Lumen | : 2520 lm / 3780 lm / 5343.2 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 3000K / 4000K / 5700K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Pendant |
| Housing Colour | : RAL 9003 / RAL 9005 |

* Technical values have a tolerance of $\pm 5\%$.

Technical Drawing

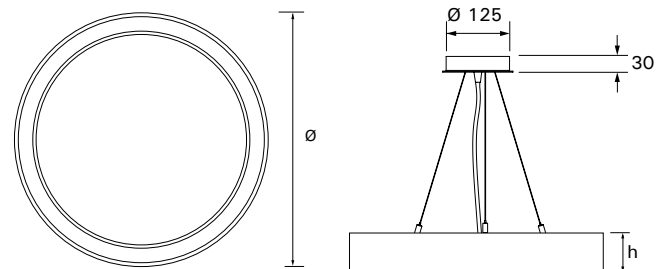

Photometric Data



Dimensions (mm)

| | Ø | h |
|------|------|----|
| 36 W | 606 | 98 |
| 54 W | 886 | 98 |
| 80 W | 1206 | 98 |

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |



SURFACE MOUNTED PENDANT LUMINAIRES



“


NETA stands out in architectural spaces with its light effect and design. It maximizes eye comfort thanks to its opal diffuser. Bringing a stylish touch to interiors as a pendant, NETA provides flexibility to the designer in terms of placement thanks to its rounded shape with minimalist lines required by modern designs.

”


Technical Specifications

| | |
|-------------------|---|
| Housing | : Electrostatic Powder Painted Aluminium Body |
| Optic | : Opal Diffuser |
| Light Source | : Mid Power LED |
| Power Consumption | : 17W / 23W / 47W / 95W / 120W |
| Lumen | : 1622 lm / 2375 lm / 5488 lm / 11889 lm / 15106 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 3000K / 4000K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Pendant |
| Housing Colour | : RAL 9010 |

Technical Drawing

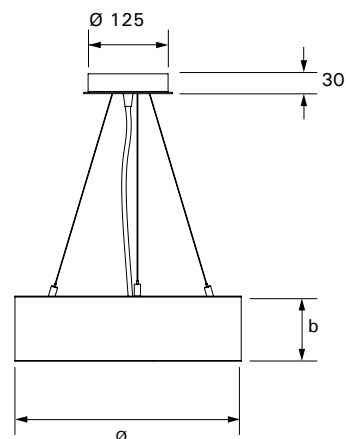

Photometric Data



Dimensions (mm)

| | ø | b |
|-------|------|-----|
| 17 W | 348 | 100 |
| 23 W | 448 | 100 |
| 47 W | 648 | 100 |
| 95 W | 878 | 100 |
| 120 W | 1200 | 100 |

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |

RECESSED MOUNTED LUMINARIES




NETA stands out in architectural spaces with its light effect and design. It maximizes eye comfort thanks to its opal diffuser. Bringing a stylish touch to interiors, NETA provides flexibility to the designer in terms of placement thanks to its rounded shape with minimalist lines required by modern designs.




Technical Specifications*

| | |
|-------------------|---|
| Housing | : Electrostatic Powder Painted Aluminium Body |
| Optic | : Opal diffuser |
| Light Source | : Mid Power LED |
| Power Consumption | : 17W / 23W / 47W / 95W / 120W |
| Lumen | : 1622 lm / 2375 lm / 5488 lm / 11889 lm / 15106 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 3000K / 4000K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Recessed Mounted |
| Housing Colour | : RAL 9010 |

Technical Drawing

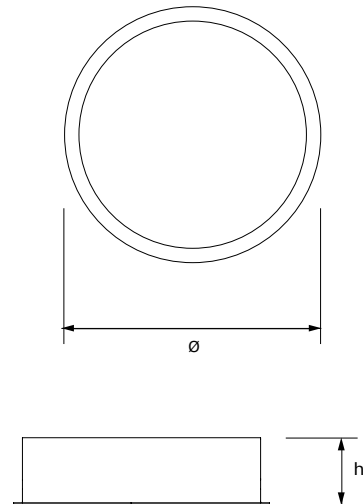

Photometric Data



Dimensions (mm)


| | Ø | h |
|------|------|-----|
| 17W | 364 | 100 |
| 23W | 445 | 100 |
| 47W | 670 | 100 |
| 95W | 895 | 100 |
| 120W | 1220 | 100 |


Ceiling Cut-Out Dimensions

| Ø |
|------|
| 352 |
| 443 |
| 658 |
| 883 |
| 1208 |

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |

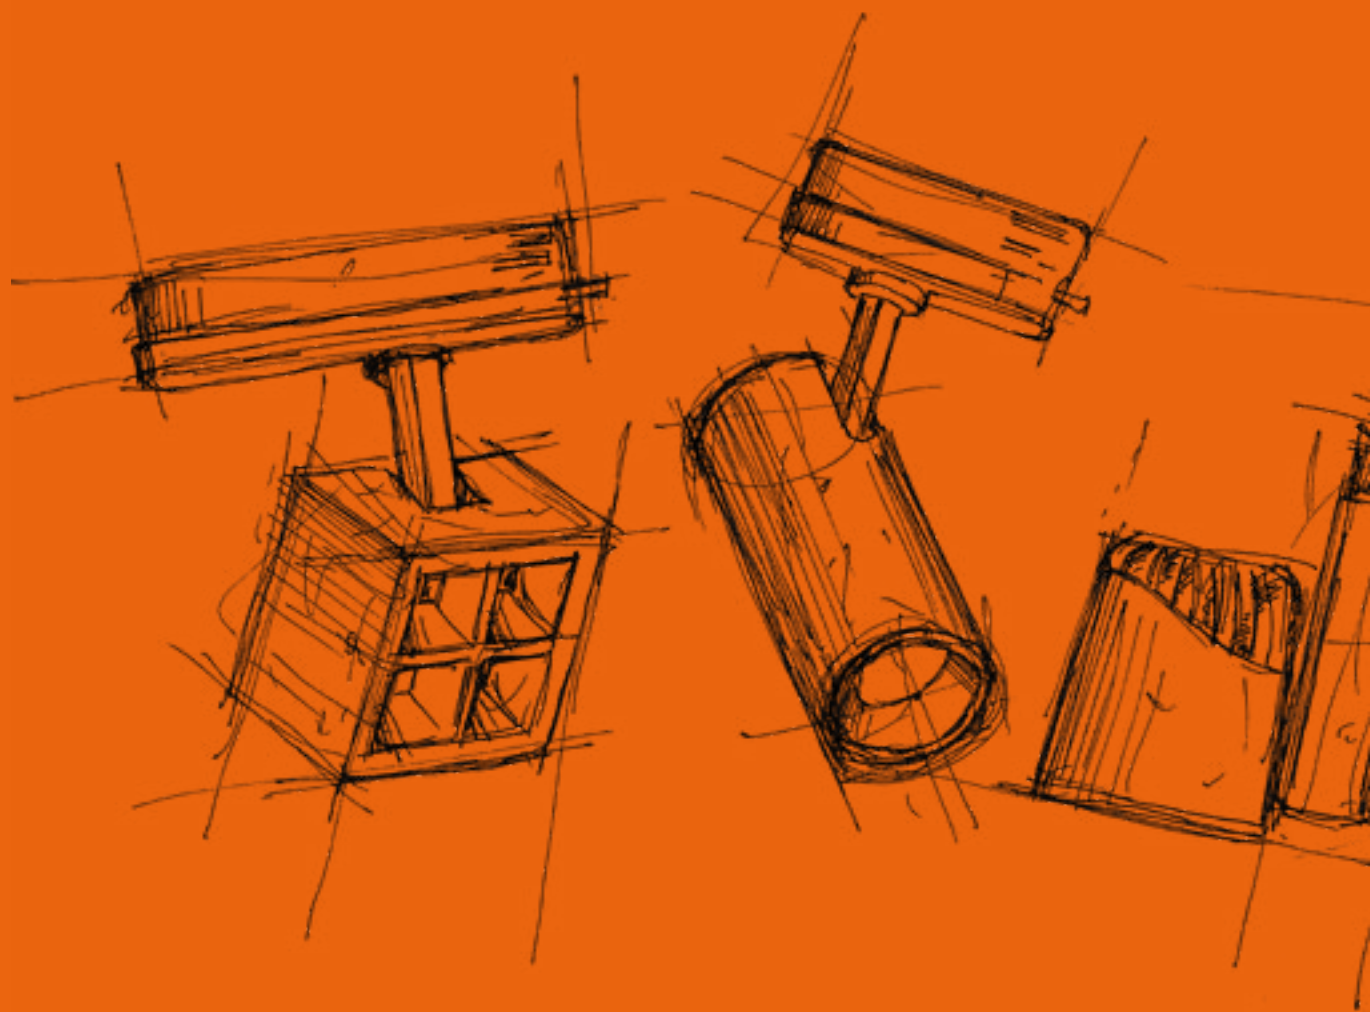

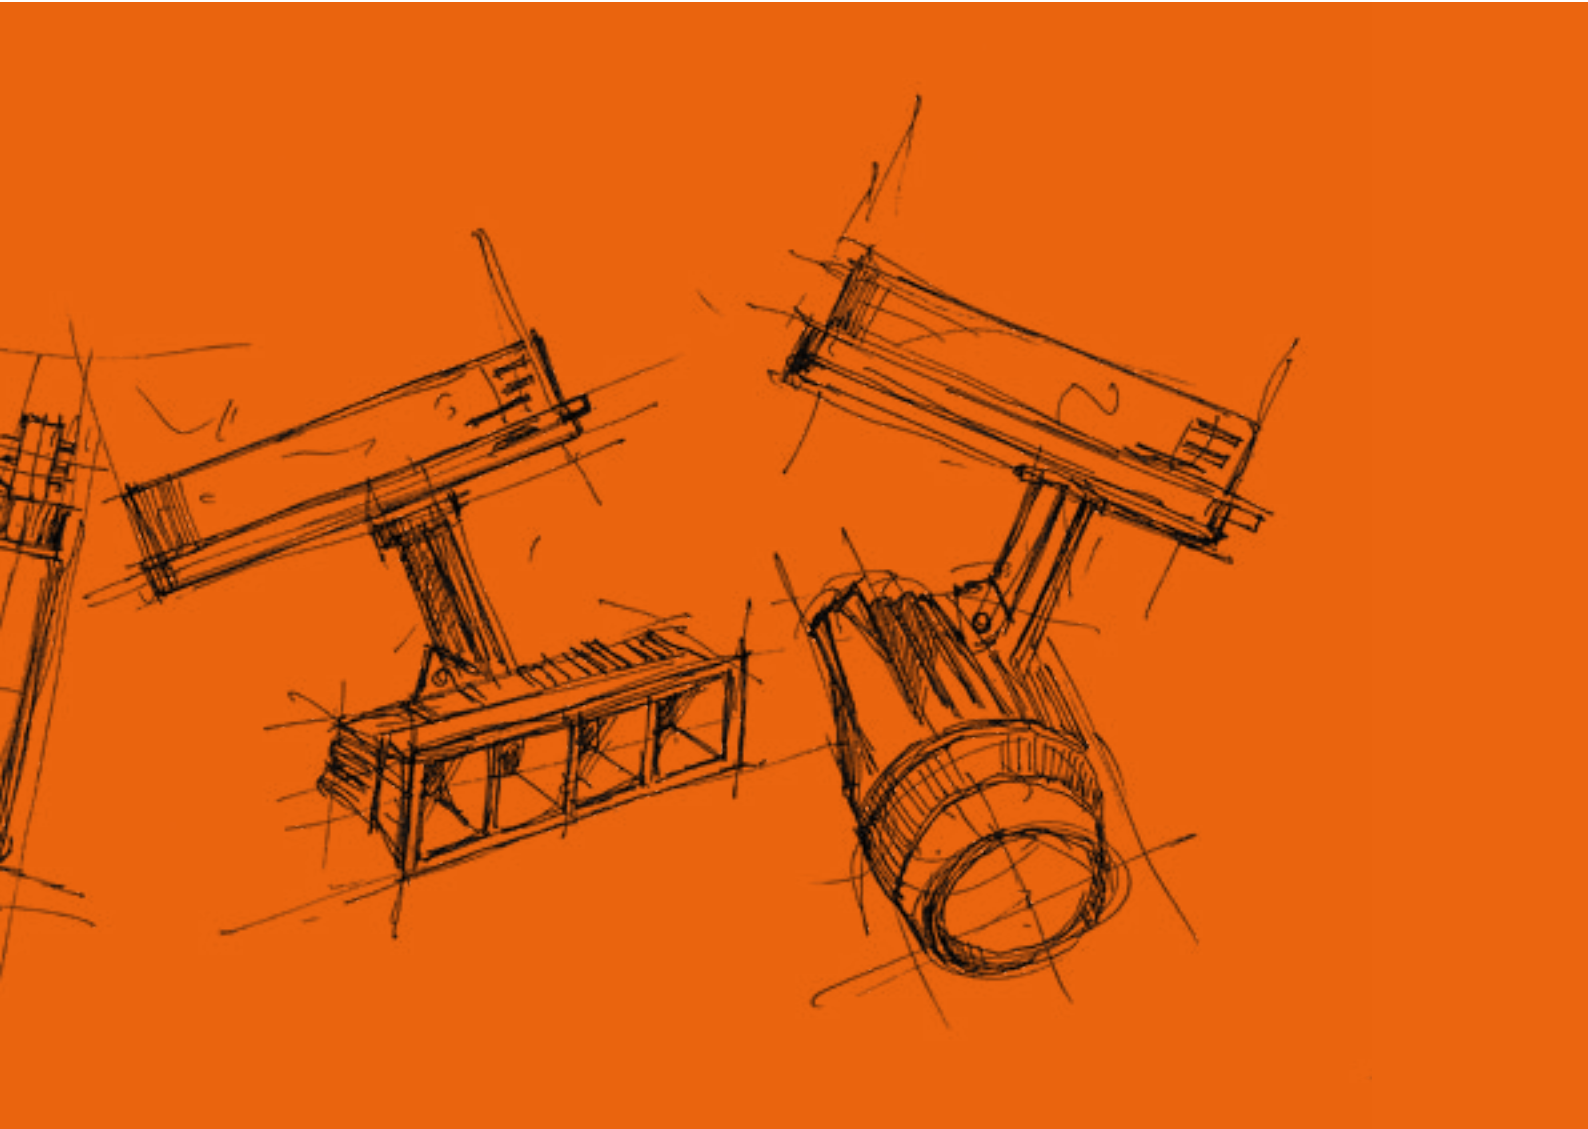

TRACK MOUNTED LUMINAIRES



TRACK MOUNTED LUMINAIRE




GIZA TRACK, a stylish architectural lighting solution, stands out with its high-performance LEDs and optical quality. Thanks to its steerable head, GIZA TRACK guarantees comfortable use in the lighting of interior spaces such as meeting rooms, residences, shops or hotels. In addition to preventing glare thanks to its deeply positioned light source, it provides 50° and 80° light distribution thanks to its special optical design lenses.


Technical Specifications

| | |
|-------------------|--|
| Housing | : Aluminium Injection Housing |
| Optic | : 50° / 80° Lens + Reflector (Black) |
| Light Source | : SMD LED |
| Power Consumption | : 8W / 10W / 12W / 15W / 20W / 24W / 28W |
| Lumen | : 894 lm / 1076 lm / 1209 lm / 1376 lm / 2200 lm / 2539lm / 2963lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Three-phase Rail / Mono-Phase Rail |

Technical Drawing



Photometric Data



Dimensions (mm)

| a | b | h |
|-----|-----|-----|
| 105 | 105 | 100 |

Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| CRI | : > 90 |





TRACK MOUNTED LUMINAIRE




“GIZA L4 Track performs a multifunctional function in illuminating your architectural spaces by rotating 355° around itself in two different forms, horizontal and vertical. Used as a track spot, GIZA L4 Track provides a homogeneous illumination by not creating glare thanks to its deeply positioned light source, as well as providing 50° and 80° light distribution thanks to its highly efficient special optical lenses.”

Technical Specifications


| | |
|-------------------|--|
| Housing | : Aluminium Injection Housing |
| Optic | : 50° / 80° Lens + Reflector (Black) |
| Light Source | : SMD LED |
| Power Consumption | : 8W / 10W / 12W / 15W |
| Lumen | : 894 lm / 1076 lm / 1209 lm / 1376 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Three-phase Rail / DALI Rail |
| Housing Colour | : RAL 9005 / RAL 9016 |

Technical Drawing


Horizontal



Vertical



Photometric Data



Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| CRI | : > 90 |

Dimensions (mm)

Horizontal

| a | b | h | h1 |
|-----|----|----|----|
| 170 | 50 | 52 | 82 |

Vertical

| a | b | h | h1 |
|-----|----|----|----|
| 170 | 50 | 52 | 82 |

STORM Track Spot



TRACK MOUNTED LUMINAIRE




“STORM TRACK SPOT can be directed wherever it is needed with its steerable head. In this way, it meets the lighting needs of retail and exhibition areas at maximum level.”


Technical Specifications*

| | |
|-------------------|---------------------------------|
| Housing | : Aluminium Injection Housing |
| Optic | : 24° / 40° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 20W / 28W / 36W |
| Lumen | : 2420 lm / 3330 lm / 4176 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 / > 90 |
| IP | : IP20 |
| Mounting Type | : Three-phase Rail / DALI Rail |
| Housing Colour | : RAL 9005 / RAL 9016 |

Technical Drawing

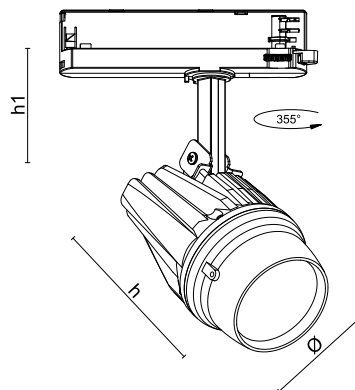

Photometric Data



Dimensions (mm)

| Ø | h | h1 |
|----|-----|----|
| 90 | 138 | 60 |

Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| CRI | : > 90 |



TRACK MOUNTED LUMINAIRE




GIZA SLIM meets all the needs of accent lighting at the highest level; It is an excellent choice for places that need accent lighting, such as retail stores, museums and exhibition halls. It achieves maximum energy savings thanks to its high-performance LEDs. In addition to maximizing visual comfort without creating glare due to its deeply positioned light source. Thanks to its special optical design lenses, it can provide 50° and 80° light distribution.


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Injection Housing |
| Optic | : 50° / 80° Lens + Reflector (Black) |
| Light Source | : SMD LED |
| Power Consumption | : 10W / 15W / 20W / 24W / 28W |
| Lumen | : 1076 lm / 1376 lm / 2200 lm / 2539 lm / 2963 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Three-phase Rail / DALI Rail |
| Housing Colour | : RAL 9005 / RAL 9016 |

Technical Drawing



Photometric Data



Dimensions (mm)

| a | b | h |
|-----|-----|----|
| 105 | 105 | 70 |

Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| CRI | : > 90 |

OCTO V.2 Track Spot



TRACK MOUNTED LUMINAIRE




“OCTO; It provides flexibility to its users with different lumen values and various optical options. It is ideal for illuminating retail and exhibition areas. It is multifunctional thanks to its layered structure and steerable head.”


Technical Specifications

| | |
|-------------------|--|
| Housing | : Aluminium Injection Housing |
| Optic | : 15° / 30° / 45° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 20W / 30W |
| Lumen | : 2000 lm / 2900 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 3000K / 4000K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Three-phase Rail / Mono-Phase Rail / DALI Rail |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

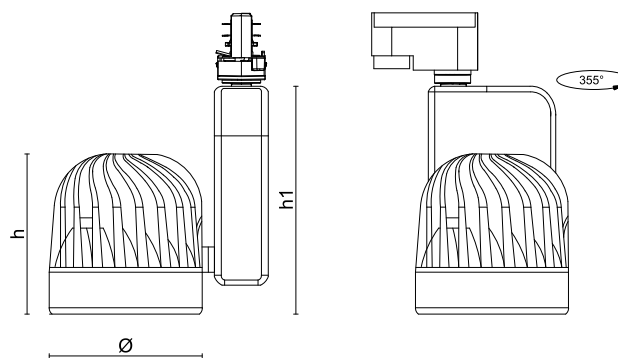

Photometric Data



Dimensions (mm)

| Ø | h | h1 |
|-----|-----|-----|
| 100 | 110 | 150 |

Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| CRI | : > 90 |



PICA V.2 Track Spot



TRACK MOUNTED LUMINAIRE




“ PICA V.2 TRACK SPOT uses a simple and polite language with its layered body structure that covers the cooling fins. Vertically positioned driver box displays a compact appearance. It meets all the requirements of accent lighting technique with different optical and lumen values. ”


Technical Specifications

| | |
|-------------------|--|
| Housing | : Aluminium Injection Housing |
| Optic | : 15° / 30° / 45° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 20W / 30W |
| Lumen | : 2000 lm / 2982 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 3000K / 4000K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Three-phase Rail / Mono-Phase Rail / DALI Rail |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

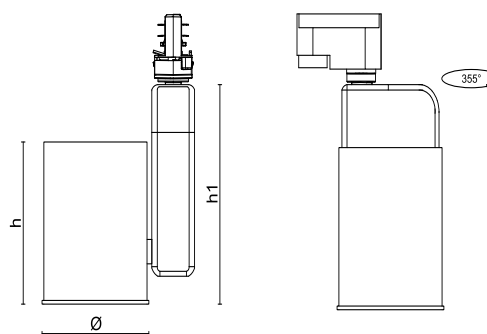

Photometric Data



Dimensions (mm)

| Ø | h | h1 |
|----|-----|-----|
| 85 | 110 | 150 |

Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| CRI | : > 90 |



TACO Mini / Midi / Maxi Track Spot



TRACK MOUNTED LUMINAIRE




TACO TRACK SPOT, a member of the track spot family; It appears in three different forms: MINI, MIDI and MAXI. In addition to adding a different touch to the ambient atmosphere where they are used thanks to their designs, they perfectly meet the lighting needs of architectural areas thanks to their high-performance LEDs. Capturing clear light output thanks to its deeply positioned light source, TACO TRACK SPOT does not create glare and provides homogeneous illumination.

Technical Specifications


| | |
|-------------------|--|
| Housing | : Aluminium Housing |
| Optic | : 15° / 30° / 45° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 8W / 10W / 15W |
| Lumen | : 838 lm / 1028 lm / 1411 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Three-phase Rail / Mono-Phase Rail / DALI Rail |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing


Mini




Midi



Maxi



Photometric Data



Dimensions (mm)

Mini

| Ø | h | h1 |
|----|-----|-----|
| 60 | 185 | 207 |

Midi

| Ø | h1 | h |
|----|-----|-----|
| 85 | 225 | 215 |

Maxi

| Ø | h | h1 |
|-----|-----|-----|
| 100 | 215 | 235 |

Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| CRI | : > 90 |





TRACK MOUNTED LUMINAIRE




OXI TRACK SPOT is ideal for illuminating retail and exhibition areas with its different lumen values and optical options. Its layered body structure and angled-ended head create a dynamic effect in its environment.




Technical Specifications

| | |
|-------------------|--------------------------------------|
| Housing | : Aluminium Injection Housing |
| Optic | : 15° / 30° / 45° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 20W / 30W |
| Lumen | : 2020 lm / 3046 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 3000K / 4000K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Three-phase Rail / Mono-Phase Rail |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

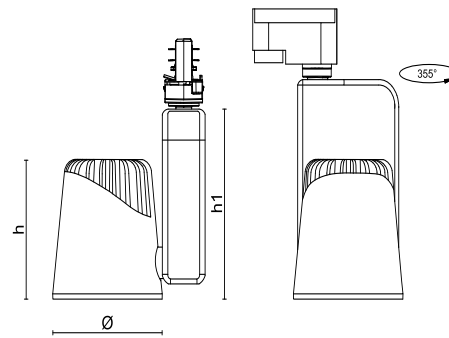

Photometric Data



Dimensions (mm)

| Ø | h1 | h |
|-----|-----|-----|
| 100 | 150 | 115 |

Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| CRI | : > 90 |



TRACK MOUNTED LUMINAIRE




“ART TRACK SPOT, which has a stylish appearance with its square-shaped body, can be produced in different lengths and sizes and adapts to any area where it is used. Thanks to the elegance and simplicity of its design, it can be used easily in both modern and classical style interiors.”


Technical Specifications

| | |
|-------------------|--|
| Housing | : Aluminium Housing |
| Optic | : 24° / 36° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 6W / 8W / 10W / 12W / 15W |
| Lumen | : 612 lm / 800 lm / 995 lm / 1164 lm / 1344 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Three-phase Rail / DALI Rail |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

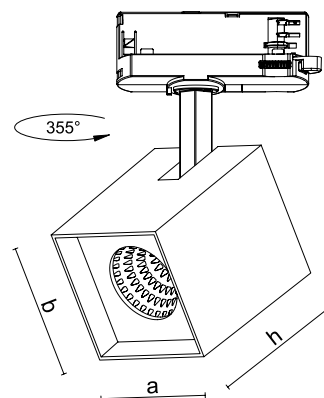

Photometric Data





Dimensions (mm)

| a | b | h |
|----|----|-----|
| 80 | 80 | 100 |

Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| CRI | : > 90 |

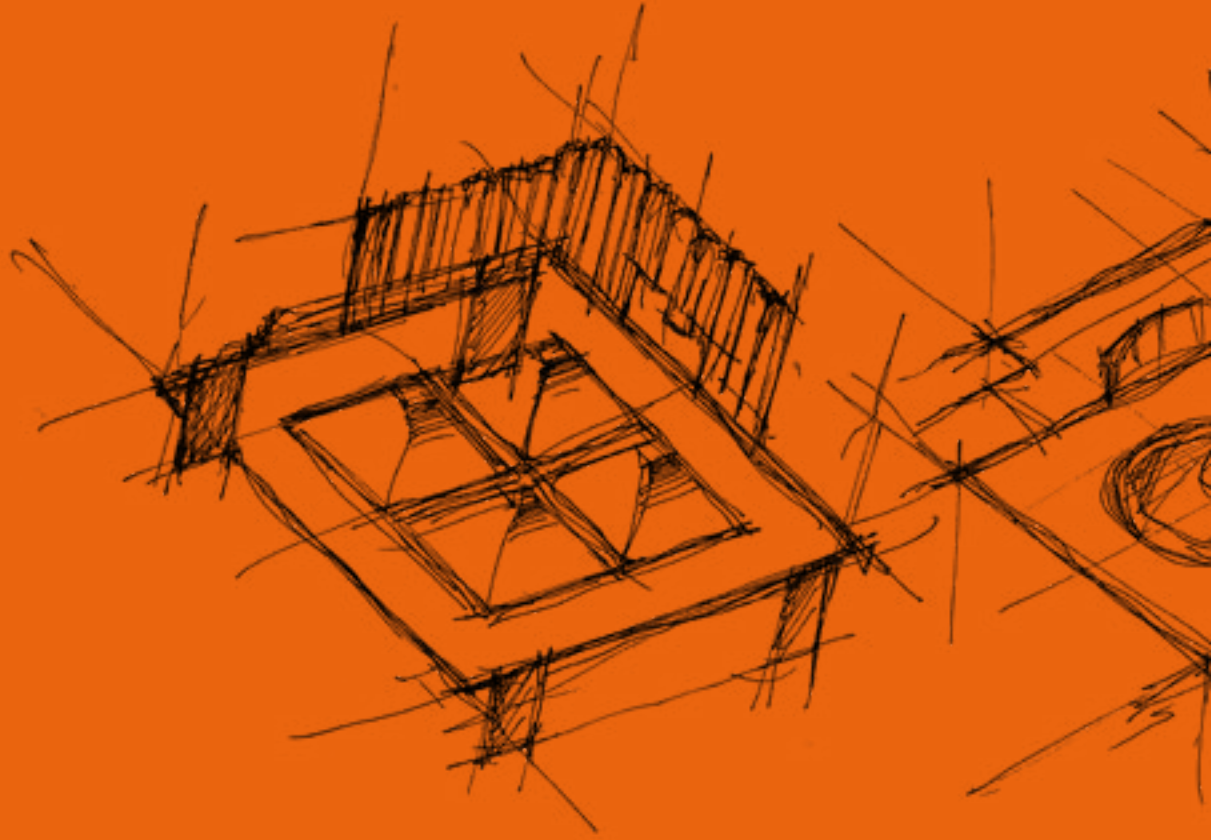

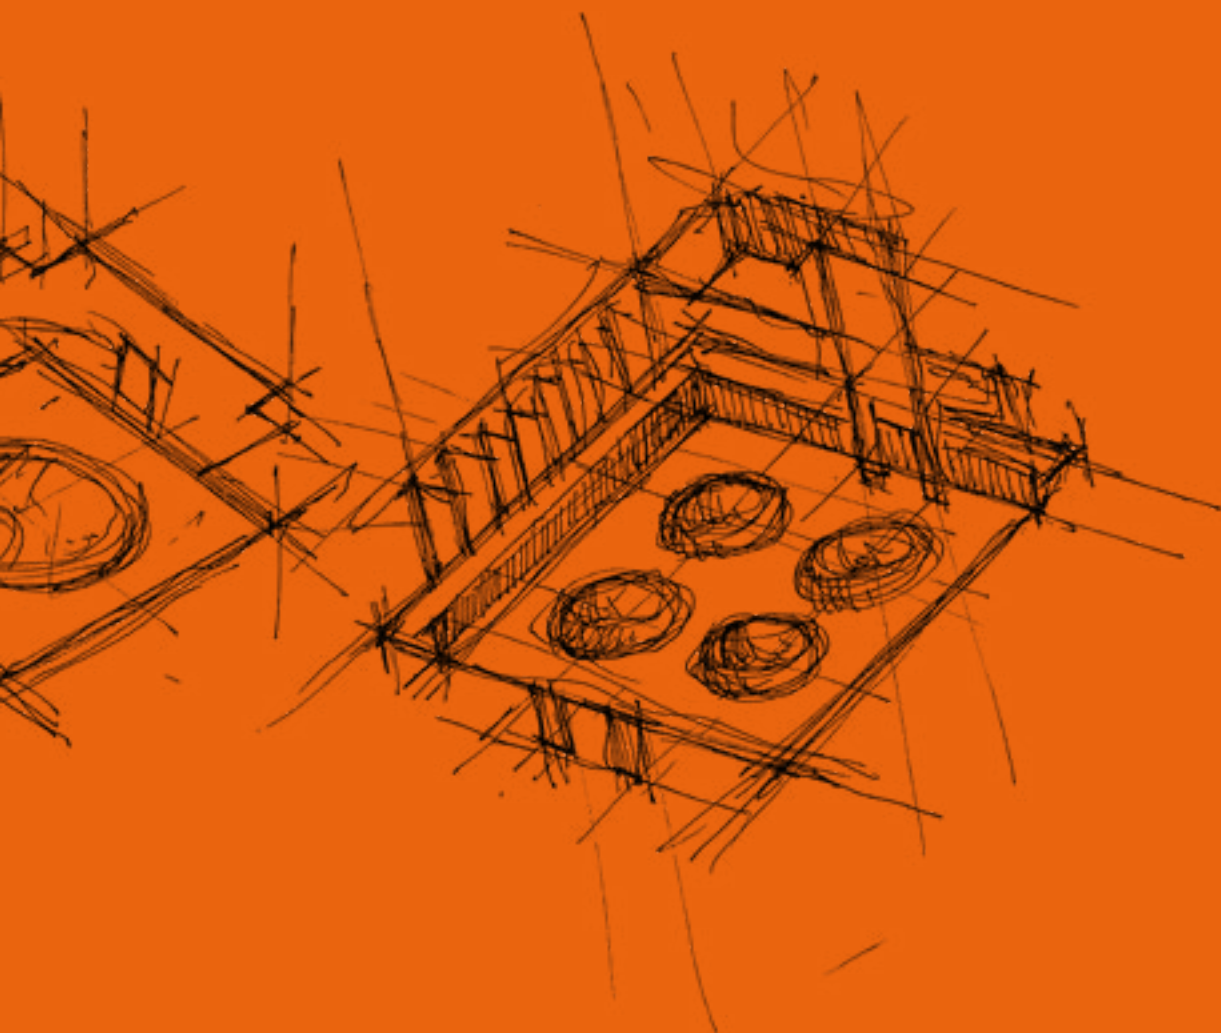

CELL CEILING
LUMINAIRES





CELL CEILING LUMINAIRE




Designed as a recessed luminaire, LORY MESH can be easily placed in open ceiling cells. Thanks to its LED technology, it provides high energy savings; It does not create glare even at maximum light output.



Technical Specifications


| | |
|-------------------|---|
| Housing | : Aluminium Injection Housing |
| Optic | : 24° / 36° / 60° Lens |
| Light Source | : COB LED |
| Power Consumption | : 8W / 10W / 12W / 15W / 20W |
| Lumen | : 800 lm / 984 lm / 1149 lm / 1378 lm / 1820 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Cell Ceiling |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

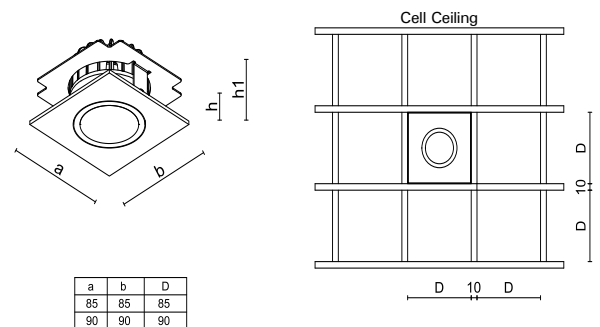

| a | b | D |
|----|----|----|
| 85 | 85 | 85 |
| 90 | 90 | 90 |

Photometric Data



Dimensions (mm)

| a | b | h | h1 |
|----|----|----|----|
| 85 | 85 | 32 | 75 |
| 90 | 90 | 32 | 75 |

Mesh Ceiling Size

| |
|---------|
| 85 x 85 |
| 90 x 90 |

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |





CELL CEILING LUMINAIRE




GIZA MESH, which minimizes glare even at maximum light output, can be easily installed in open ceiling cells. In addition to having high energy savings thanks to its special optical design lenses, it enables 50° and 80° light distribution.


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Injection Housing |
| Optic | : 50° / 80° Lens + Reflector (Black) |
| Light Source | : SMD LED |
| Power Consumption | : 8W / 10W / 12W / 15W / 20W / 24W / 28W |
| Lumen | : 894 lm / 1076 lm / 1209 lm / 1376 lm / 2200 lm / 2539lm / 2963lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Cell Ceiling |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

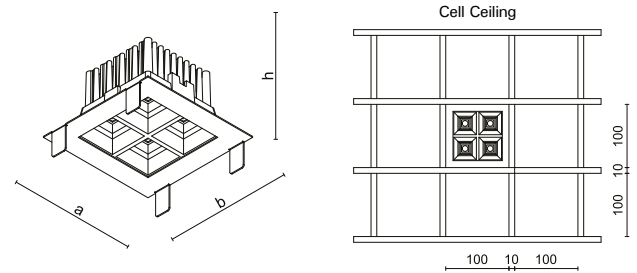

Photometric Data



Dimensions (mm)

| a | b | h |
|-----|-----|-----|
| 117 | 117 | 100 |

Mesh Ceiling Size

| |
|-----------|
| 100 x 100 |
|-----------|

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |





CELL CEILING LUMINAIRE




“Thanks to its LED technology, MIDDY MESH is energy efficient. Thanks to its design, it can be easily mounted in open ceiling cells, which makes the luminaire body almost invisible and provides a stylish appearance in your architectural spaces.”


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Housing |
| Optic | : 60° Lens |
| Light Source | : SMD LED |
| Power Consumption | : 6W / 8W / 10W / 12W / 15W |
| Lumen | : 480 lm / 640 lm / 800 lm / 960 lm / 1138 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Cell Ceiling |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

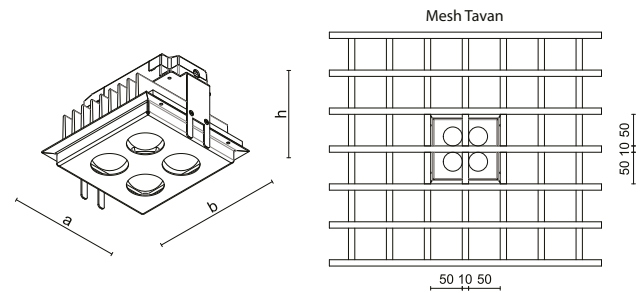

Photometric Data



Dimensions (mm)


| a | b | h |
|-----|-----|----|
| 115 | 115 | 80 |

Mesh Ceiling Size

| |
|---------|
| 50 x 50 |
|---------|

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |





CELL CEILING LUMINAIRE




“ORI SMALL MESH has a structure that does not create glare due to its 58mm diameter, micro-sized and deeply positioned light source. In addition to being easily integrated into open ceiling cells; Thanks to its high light efficiency, it provides significant savings compared to classical lighting.”


Technical Specifications

| | |
|-------------------|--------------------------------------|
| Housing | : Aluminium Injection Housing |
| Optic | : 24° / 36° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 6W / 8W / 10W / 12W |
| Lumen | : 558 lm / 784 lm / 983 lm / 1155 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Cell Ceiling |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

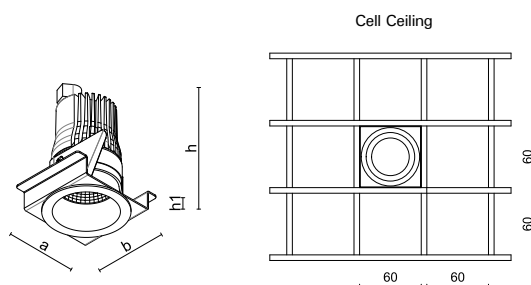

Photometric Data



Dimensions (mm)

| a | b | h | h1 |
|----|----|-----|----|
| 57 | 57 | 100 | 15 |

Mesh Ceiling Size

| |
|---------|
| 60 x 60 |
|---------|

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |





CELL CEILING LUMINAIRE




“LUP KR MESH adds a pleasant aesthetic to your architectural spaces thanks to its square frame design. Thanks to its deeply positioned LED, it captures clear light output, does not create glare and increases visual comfort. Its lenses can be easily changed where it is positioned according to the required light angle.”


Technical Specifications

| | |
|-------------------|----------------------------------|
| Housing | : Aluminium Housing |
| Optic | : 24° / 36° / 60° Lens |
| Light Source | : COB LED |
| Power Consumption | : 8W / 10W / 15W |
| Lumen | : 852 lm / 1045 lm / 1435 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Cell Ceiling |
| Housing Colour | : RAL 9005 / RAL 9016 / RAL 7016 |

Technical Drawing

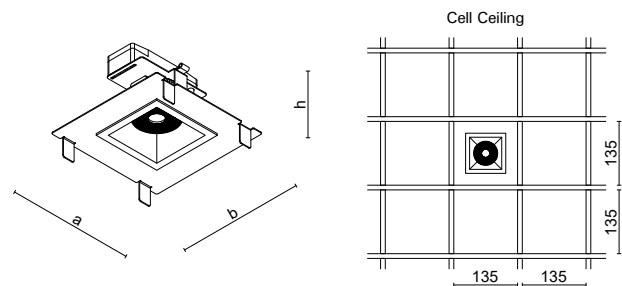

Photometric Data



Dimensions (mm)

| a | b | h |
|-----|-----|----|
| 148 | 148 | 83 |


Mesh Ceiling Size


135 x 135

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |
| CRI | : > 90 |



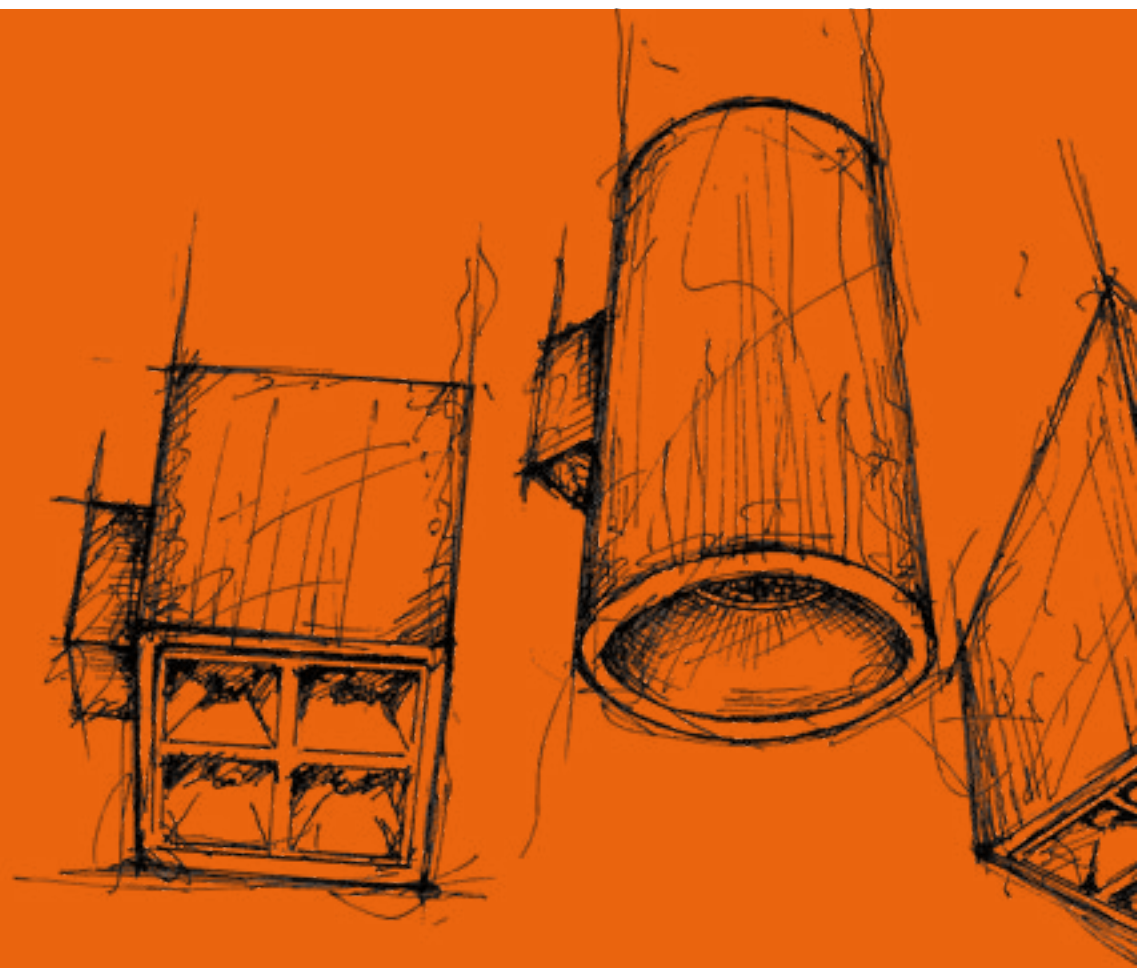

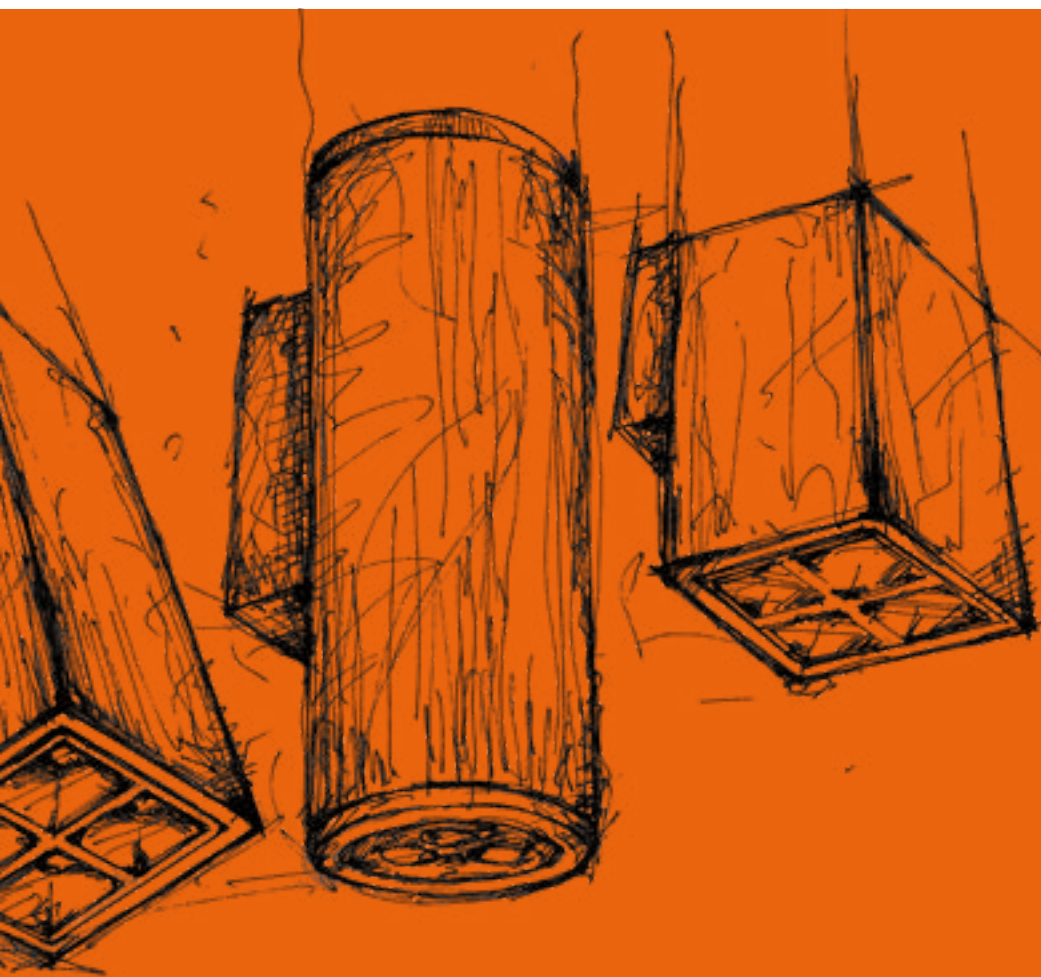

WALL MOUNTED LUMINAIRES

VENO Wall Mounted



DECORATIVE WALL MOUNTED LUMINAIRE




“Designed as a stylish and decorative complement to architectural spaces, VENO softens sharp shadows with its clean light output. It is multifunctional with various optical and lumen options. Thanks to its deep light source, it provides a lighting experience that does not tire the eyes.”


Technical Specifications

| | |
|-------------------|--|
| Housing | : Aluminium Housing |
| Optic | : 24° / 36° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 6W / 8W / 10W / 12W / 15W |
| Lumen | : 636lm / 848lm / 1060lm / 1272lm / 1485lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Surface Mounted |
| Housing Colour | : RAL 9016 / RAL 9005 / RAL 9006 |

Technical Drawing

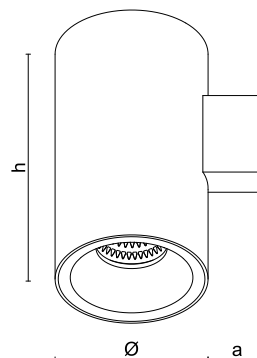

Photometric Data



Dimensions (mm)

| a | h | Ø |
|----|-----|-----|
| 45 | 180 | 100 |

Options

| | |
|--------------------|-----------------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| CRI | : > 90 |
| Optic | : Opal Diffuser |



VENO Double Side Wall Mounted



DECORATIVE WALL MOUNTED LUMINAIRE




“ VENO displays light in an aesthetic and stylish way with its bi-directional feature. Designed as a decorative complement to architectural areas, VENO adds difference to the atmosphere of the area by softening sharp shadows. ”


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Housing |
| Optic | : 24° / 36° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 2x6W / 2x7W / 2x10W / 2x12W / 2x15W |
| Lumen | : 1272 lm / 1485 lm / 2120 lm / 2544 lm / 2970 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Surface Mounted |
| Housing Colour | : RAL 9016 / RAL 9005 / RAL 9006 |

Technical Drawing

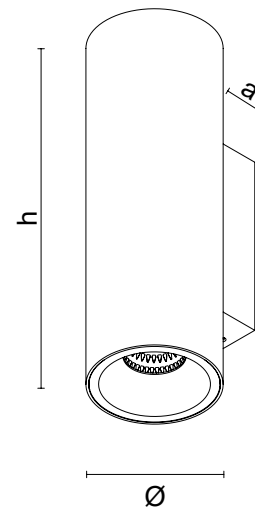

Photometric Data



Dimensions (mm)

| a | h | Ø |
|----|-----|-----|
| 28 | 300 | 100 |

Options

| | |
|--------------------|-----------------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| CRI | : > 90 |
| Optic | : Opal Diffuser |





DECORATIVE WALL MOUNTED LUMINAIRE




“APLIKED’s cylindrical form is made of aluminum profile. APLIKED, which has various optical options, can shine on wall surfaces in one and two directions. Equipped with LED technology, APLIKED achieves maximum efficiency by saving energy besides providing full protection against dust and strong water sprays with its IP66 protection class.”


Technical Specifications

| | |
|-------------------|--|
| Housing | : Aluminium Housing |
| Optic | : 11° / 18° / 31° / 44° Lens |
| Diffuser | : Tempered transparent glass |
| Light Source | : Power LED |
| Power Consumption | : 7W / 8W |
| Lumen | : (7 W 11°) 670 lm / (7 W 18°) 624 lm (8 W 31°) 640 lm / (7 W 44°) 660 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 3000K / 4000K / 5700K |
| CRI | : > 70 |
| IP | : IP66 |
| Mounting Type | : Surface Mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

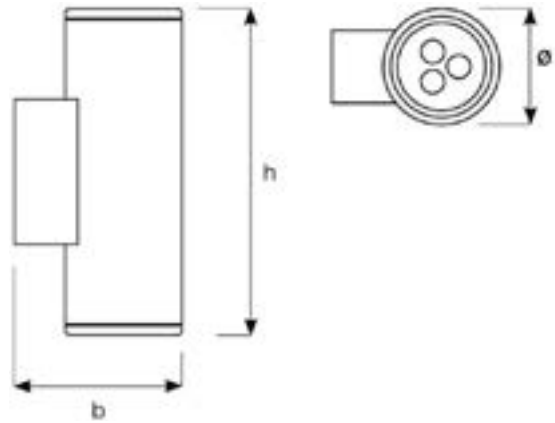


Photometric Data

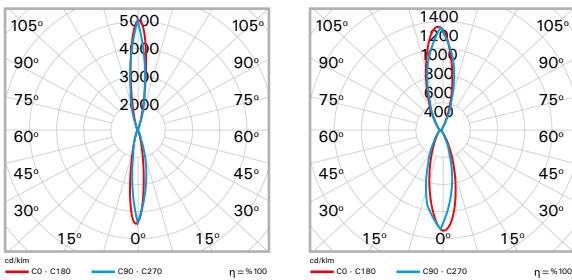

11°

18°

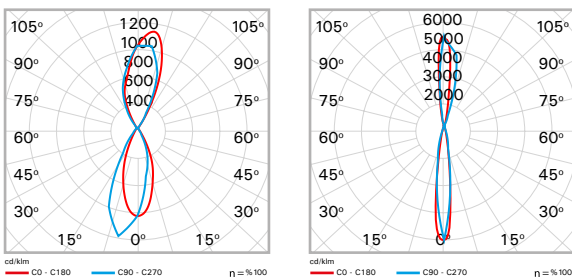


31°

44°

Dimensions (mm)

| Ø | b | h |
|----|-----|-----|
| 80 | 115 | 225 |

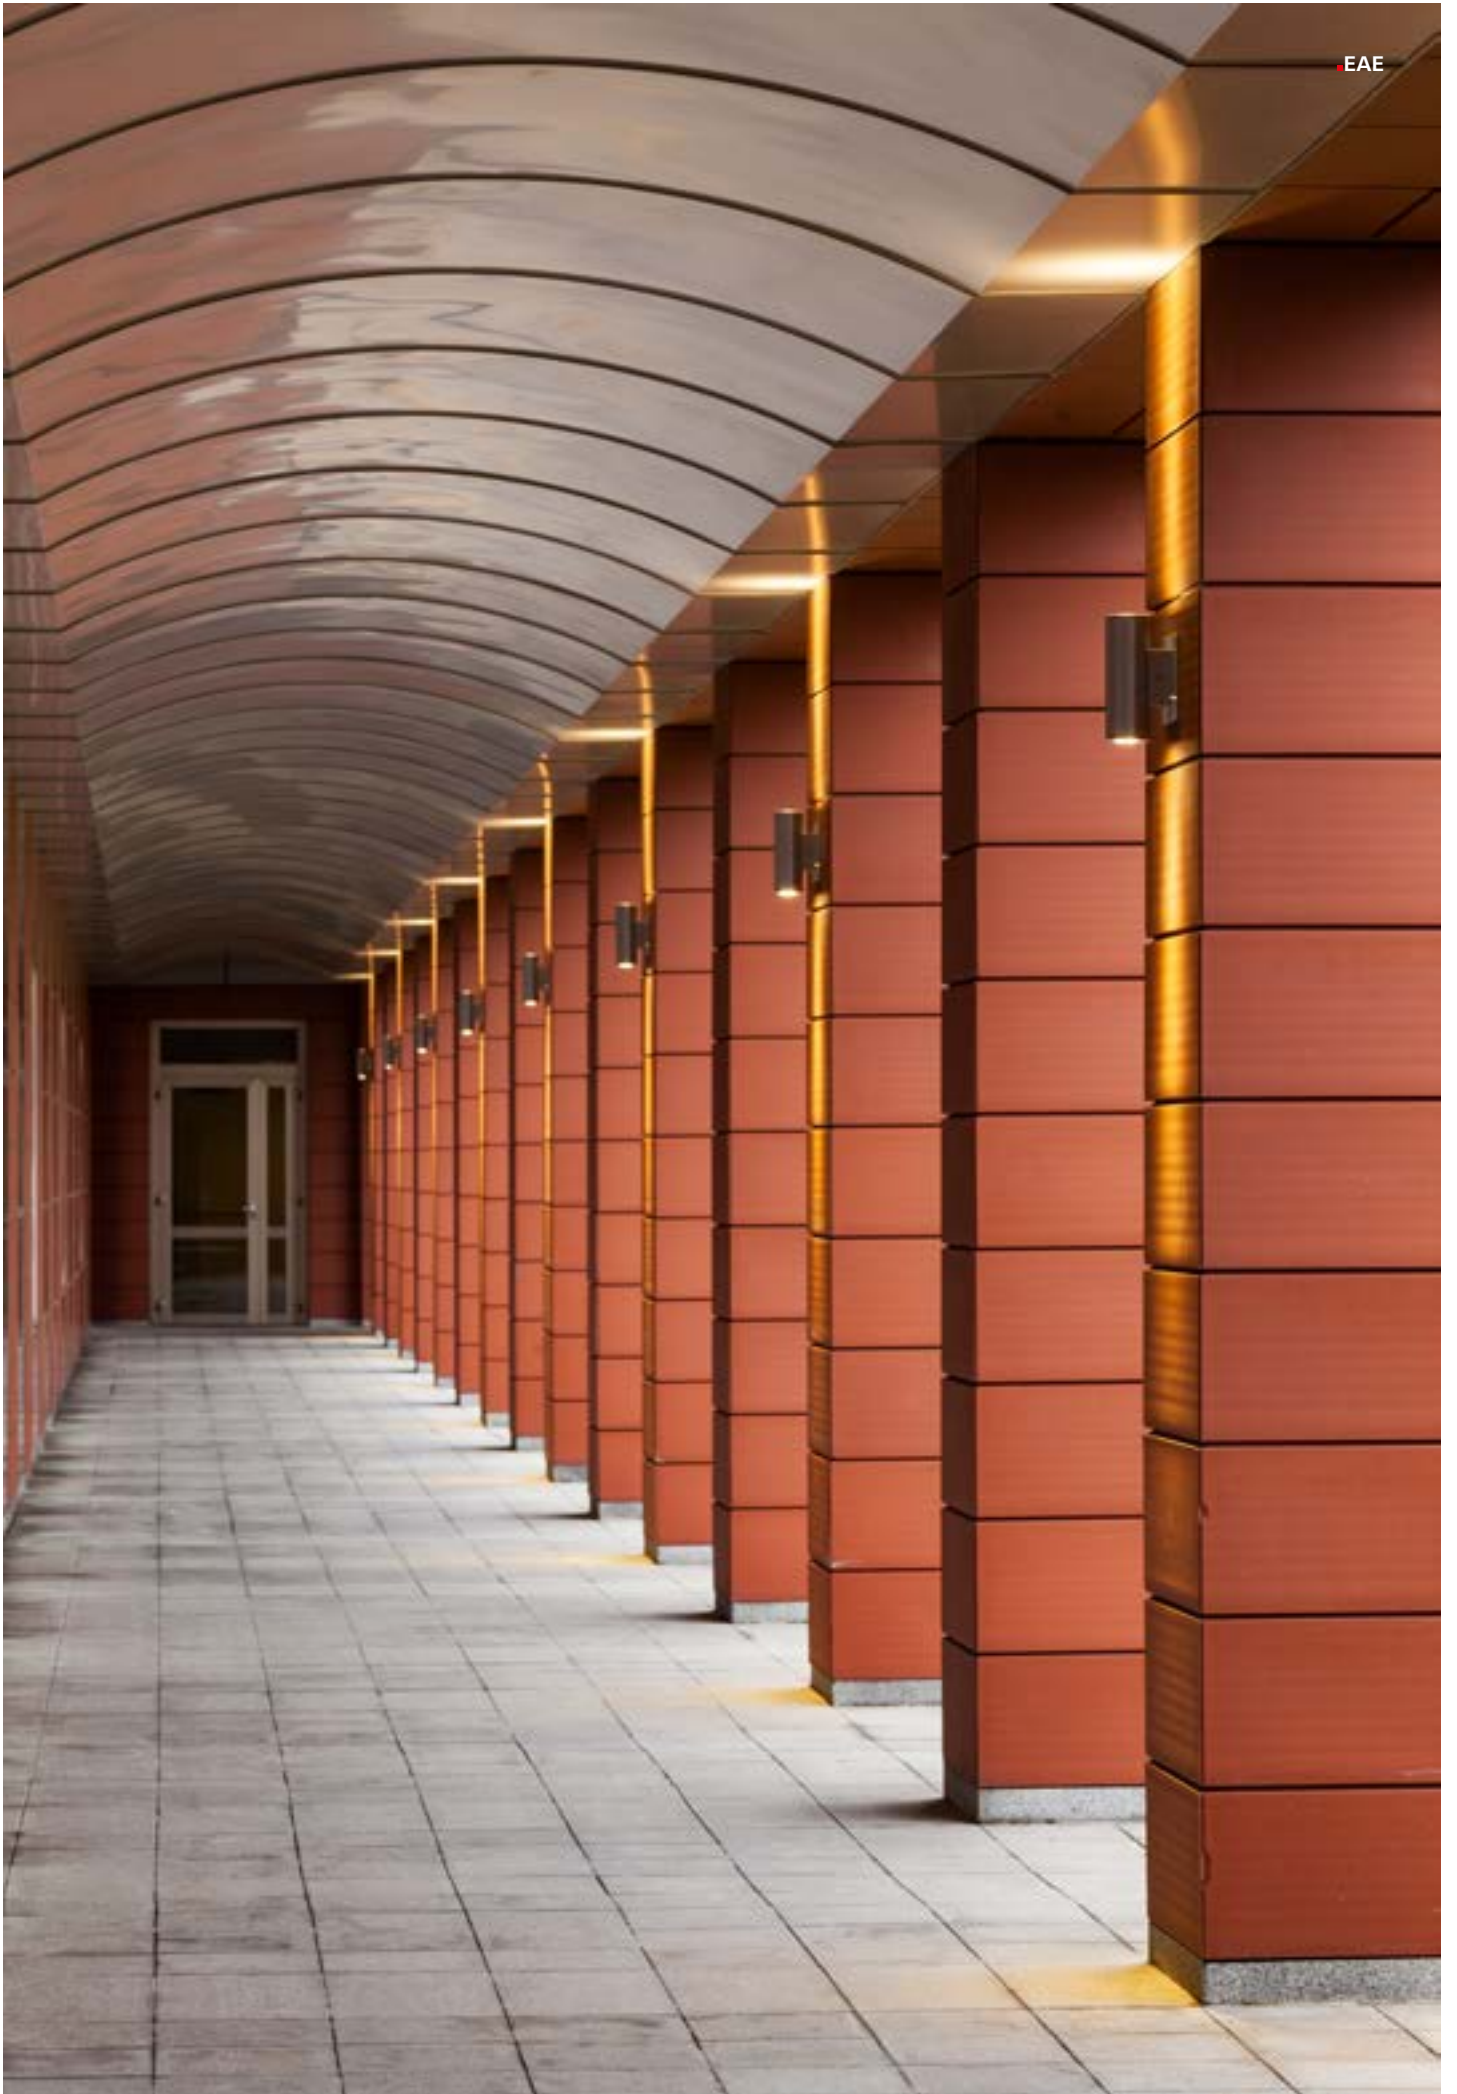




DECORATIVE WALL MOUNTED LUMINAIRE




Standing out with its modern design and maximum light efficiency, ART WALL MOUNTED adds an aesthetic touch to spaces. Featuring LED technology, ART WALL MOUNTED provides high-performance lighting by consuming low energy.




Technical Specifications

| | |
|-------------------|--|
| Housing | : Aluminium Housing |
| Optic | : 24° / 36° / 60° Reflector |
| Light Source | : COB LED |
| Power Consumption | : 6W / 8W / 10W / 12W / 15W |
| Lumen | : 612 lm / 800 lm / 995 lm / 1164 lm / 1344 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Surface Mounted |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing



Photometric Data



Dimensions (mm)

| a | b | h |
|----|----|-----|
| 80 | 80 | 100 |

Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : None |
| CRI | : > 90 |

GIZA Wall Mounted Asymmetrical



DECORATIVE WALL MOUNTED LUMINAIRE




“GIZA WALL MOUNTED ASYMMETRICAL, which looks like it is coming out of the wall, brings a new perspective to wall lamp design with its 30° asymmetrical form. With its deep reflective structure, it does not create glare and increases visual comfort. It can be mounted in different ways with its special base.”


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Injeciton Housing |
| Optic | : 50° / 80° Lens + Reflector (Black) |
| Light Source | : SMD LED |
| Power Consumption | : 8W / 10W / 12W / 15W / 20W / 24W / 28W |
| Lumen | : 894 lm / 1076 lm / 1209 lm / 1376 lm / 2200 lm / 2539 lm / 2963 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Surface Mounted |

Technical Drawing

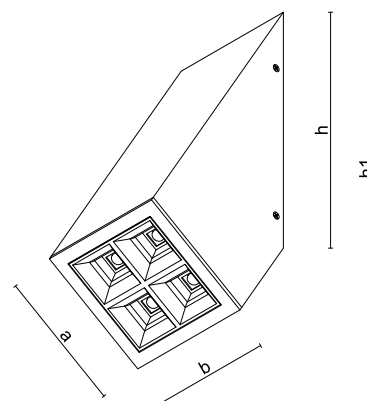

Photometric Data



Dimensions (mm)

| a | b | h | h1 |
|-----|-----|-----|-----|
| 100 | 100 | 200 | 275 |

Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : None |
| CRI | : > 90 |



GIZA Wall Mounted IP65 / IP20



DECORATIVE WALL MOUNTED LUMINAIRE




“GIZA WALL MOUNTED does not create glare with its deeply positioned light source, which brings a new perspective to the classic sconce design. It provides protection against dust and water sprays with its IP65 protection class. Thanks to its highly efficient special optical design lenses, it offers 50° and 80° circular light distribution.”

Technical Specifications


| | |
|-------------------|---|
| Housing | : Aluminium Injection Housing |
| Optic | : 50° / 80° Lens + Reflector (Black) |
| Light Source | : SMD LED |
| Power Consumption | : 8W / 10W / 12W / 15W / 20W / 24W / 28W |
| Lumen | : 894 lm / 1076 lm / 1209 lm / 1376 lm / 2200 lm / 2539 lm / 2963 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 / IP65 |
| Mounting Type | : Surface Mounted |

Technical Drawing


IP20 Wall Mounted



IP65 Wall Mounted



Photometric Data



Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| CRI | : > 90 |


Dimensions (mm)


IP20 / IP65

| a | b | h |
|-----|-----|-----|
| 105 | 105 | 100 |





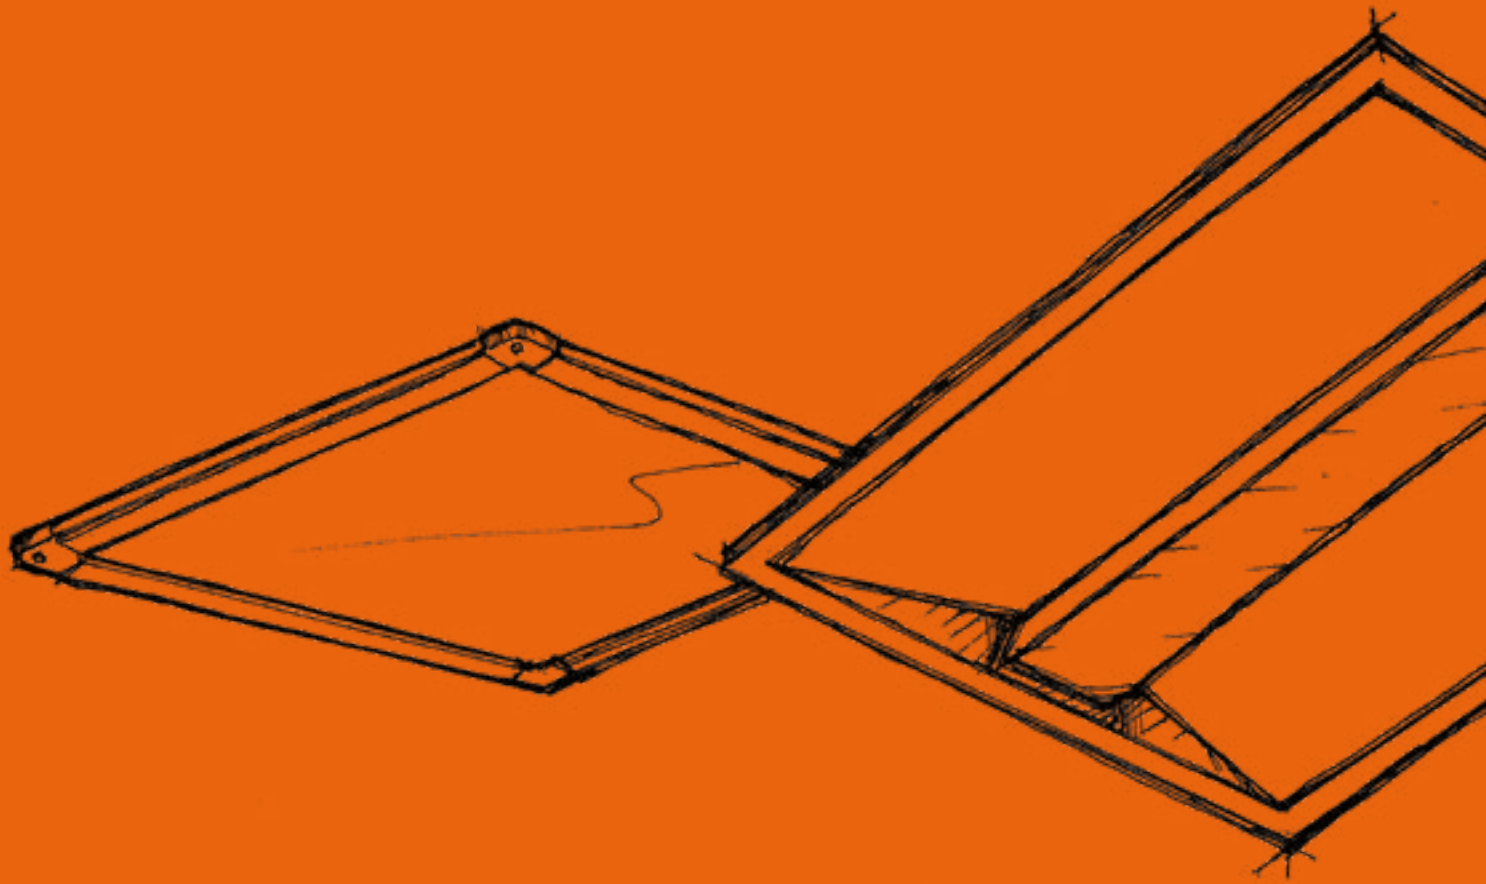

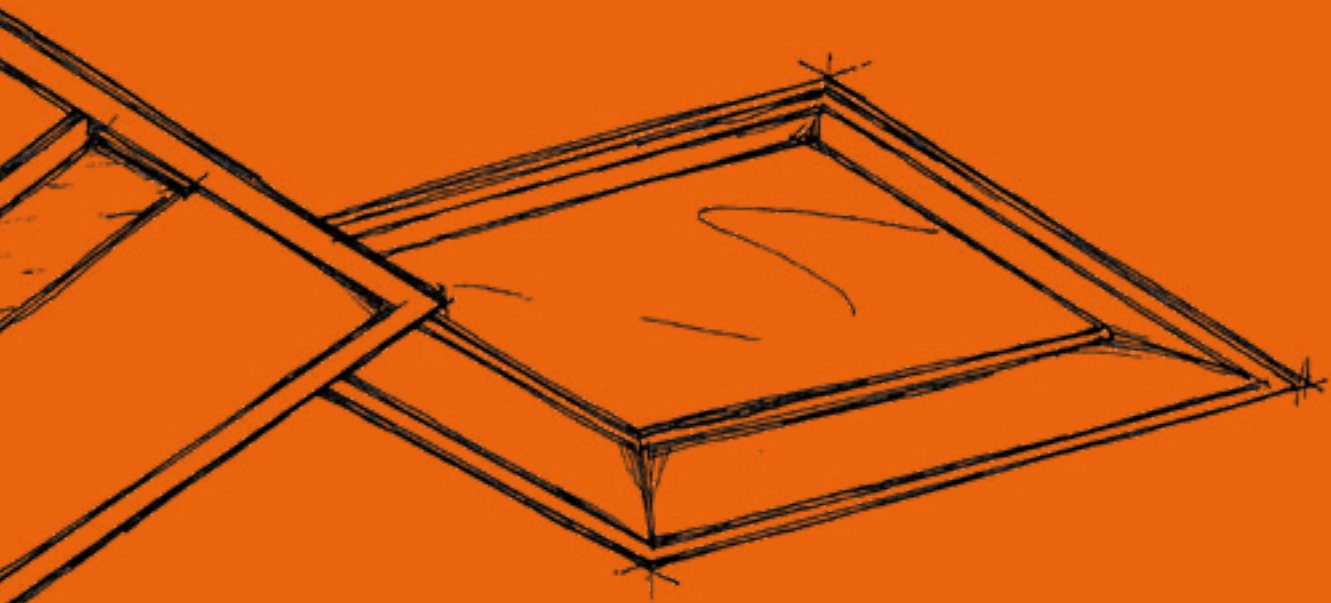

OFFICE
LUMINAIRES



OFFICE LIGHTING LED LUMINAIRE



“BLOOM is ideal for illuminating offices, schools and retail areas thanks to its opal diffuser. Light surfaces defined in different sizes can be adapted to modular ceiling types.”

Technical Specifications


- Housing : Sheet Body
- Optic : Opal Diffuser
- Light Source : Mid Power LED

- Power Consumption : **60x60 HE**: 25W, 29W, 38W, 53W - **60x60 ECO**: 26W
30x30: 18W - **30x60**: 18W - **30x90**: 30W
30x120: 32W, 42W - **15x120**: 18W - **60x120**: 30W, 59W, 68W


- Lumen : **60x60 HE**: 3120.5 lm / 4492.9 lm / 3597.1 lm / 6127.6 lm
60x60 ECO: 2724.4 lm - **30x30**: 1355.9 lm - **30x60**: 1718.9 lm
30x90: 3181.9 lm - **30x120**: 2875.9 lm / 4595.9 lm
15x120: 2397.5 lm - **60x120**: 3463.1 lm / 5537.2 lm / 7626.7 lm

- Input Voltage : 220-240V AC 50/60Hz
- Color Temperature : 3000K / 4000K / 5700K
- CRI : > 80
- IP : IP20 / IP40
- Mounting Type : Recessed Mounted
- Housing Colour : RAL 9003

Technical Drawing

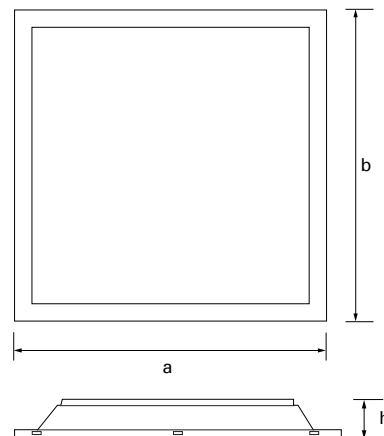

Photometric Data



Dimensions (mm)

| | a | b | h |
|----------|-----|------|-----|
| 300x300 | 295 | 295 | 60 |
| 300x600 | 295 | 595 | 87 |
| 300x900 | 295 | 895 | 80 |
| 300x1200 | 295 | 1195 | 75 |
| 150x1200 | 146 | 1196 | 87 |
| 600x600 | 595 | 595 | 75 |
| 600x1200 | 595 | 1195 | 100 |

Ceiling Cut-Out Dimensions

| | |
|----------|------------|
| 300x300 | 275 x 275 |
| 300x600 | 280 x 580 |
| 300x900 | 275 x 870 |
| 300x1200 | 255 x 1155 |
| 150x1200 | 120 x 1170 |
| 600x600 | 580 x 580 |
| 600x1200 | 575 x 1175 |

Options

- False Ceiling Compatibility : Plasterboard / Clip-in / Lay-in / Surface Mounted / Acoustic
- Emergency Kit : Yes (1-3 Hours)
- DALI Compatibility : Yes



OFFICE LIGHTING LED LUMINAIRE




BLOOM-S NG has clean lines; It has a wide range of uses, from hospitals to schools, from offices to retail. It is energy efficient with advanced LED technology. Standing out with being both environmentally friendly and economical, BLOOM-S NG increases your energy efficiency and reduces your costs by offering a long-term lighting solution.


Technical Specifications

| | |
|-------------------|---------------------------|
| Housing | : Sheet Body |
| Optic | : Opal Polistren Diffuser |
| Light Source | : Mid Power LED |
| Power Consumption | : 24W / 36W |
| Lumen | : 3376 lm / 5106 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 3000K / 4000K / 5700K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Recessed Mounted |
| Housing Colour | : RAL 9003 |

Technical Drawing

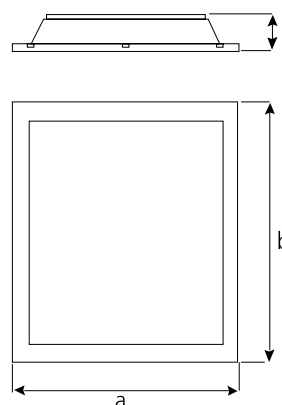

Photometric Data



Dimensions (mm)

| | a | b | h | d ¹ x d ² |
|---------|-----|-----|----|---------------------------------|
| 600x600 | 595 | 595 | 75 | 580x580 |

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |



OFFICE LIGHTING LED LUMINAIRE




BLOOM IP65 provides the ideal lighting solution in accordance with standards in many areas such as medical product, medical equipment production, operating rooms and intensive care units that require cleanliness and hygiene. Thanks to its opal diffuser, it offers a homogeneous illumination that does not tire the eyes.


Technical Specifications

| | |
|-------------------|-------------------------|
| Housing | : DKP Sheet Body |
| Optic | : Opal Diffuser |
| Light Source | : Mid Power LED |
| Power Consumption | : 25W |
| Lumen | : 2875 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 3000K / 4000K / 5700K |
| CRI | : > 80 |
| IP | : IP65 |
| Mounting Type | : Recessed Mounted |
| Housing Colour | : RAL 9003 |

Technical Drawing

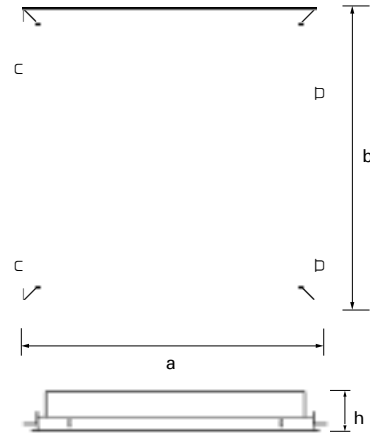

Photometric Data



Dimensions (mm)

| | a | b | h |
|---------|-----|-----|----|
| 600x600 | 633 | 633 | 86 |

Ceiling Cut-Out Dimensions

| | |
|---------|-----------|
| 600x600 | 610 x 610 |
|---------|-----------|

Options

| | |
|-----------------------------|-------------------------------------|
| False Ceiling Compatibility | : Plasterboard / Rockwool / Clip-in |
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |



BLOOM Recessed Mounted



OFFICE LIGHTING LED LUMINAIRE




BLOOM ELP is designed to meet the needs of all types of interiors. With different sizes and color temperatures, it helps you create the atmosphere you want in your living spaces. Equipped with LED technology, BLOOM ELP not only offers an environmentally friendly option with low energy consumption; With its recessed mounted design, plasterboard, rock wool, etc. it integrates into the ceilings as a whole.


Technical Specifications

| | |
|-------------------|-----------------------|
| Housing | : Sheet Body |
| Optic | : Opal Diffuser |
| Light Source | : LED |
| Power Consumption | : 36W |
| Lumen | : 4000 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Recessed Mounted |
| Housing Colour | : RAL 9003 |

Technical Drawing

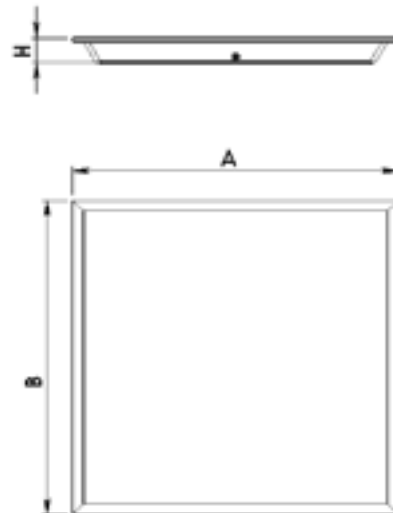

Photometric Data



Dimensions (mm)

| | a | b | h |
|----------|-----|------|----|
| 300x300 | 300 | 300 | 35 |
| 600x600 | 600 | 600 | 50 |
| 300x1200 | 300 | 1200 | 35 |
| 600x1200 | 600 | 1200 | 35 |

Ceiling Cut-Out Dimensions

| | |
|----------|------------|
| 300x300 | 275 x 275 |
| 600x600 | 575 x 575 |
| 300x1200 | 275 x 1175 |
| 600x1200 | 575 x 1175 |

Options

| | |
|-----------------------------|---|
| False Ceiling Compatibility | : Plasterboard / Rockwool / Clip-in / Lay-in / Acoustic |
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |





OFFICE LIGHTING LED LUMINAIRE





It is especially designed to meet the demanding requirements of controlled environments where cleanliness and sterility are very important, and stands out with its compliance with GMP conditions. It provides full protection against dust and splashes of water with its IP65 and IP40 classes. It fulfills its compliance with clean room standards by minimizing the risk of glare with its opal diffuser. It completely meets the lighting needs of sectors such as pharmaceuticals, food, biotechnology, electronics production and sterile laboratories.



Technical Specifications

| | |
|-------------------|-------------------------|
| Housing | : Sheet Body |
| Optic | : Opal Diffuser |
| Light Source | : Mid Power LED |
| Power Consumption | : 47W / 53W |
| Lumen | : 4400 lm / 6156 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 3000K / 4000K / 5700K |
| CRI | : > 80 |
| IP | : IP65 / IP40 |
| Mounting Type | : Recessed Mounted |
| Housing Colour | : RAL 9003 |


Technical Drawing

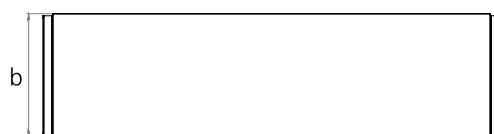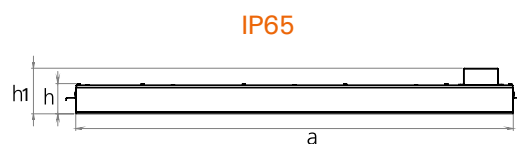

IP40



Photometric Data



Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |


Dimensions (mm)


IP65

| | a | b | h |
|---------|-----|-----|-----|
| 600x600 | 625 | 625 | 125 |

IP40

| | a | b | h | h1 |
|----------|------|-----|----|------|
| 300x1080 | 1080 | 300 | 79 | 1185 |

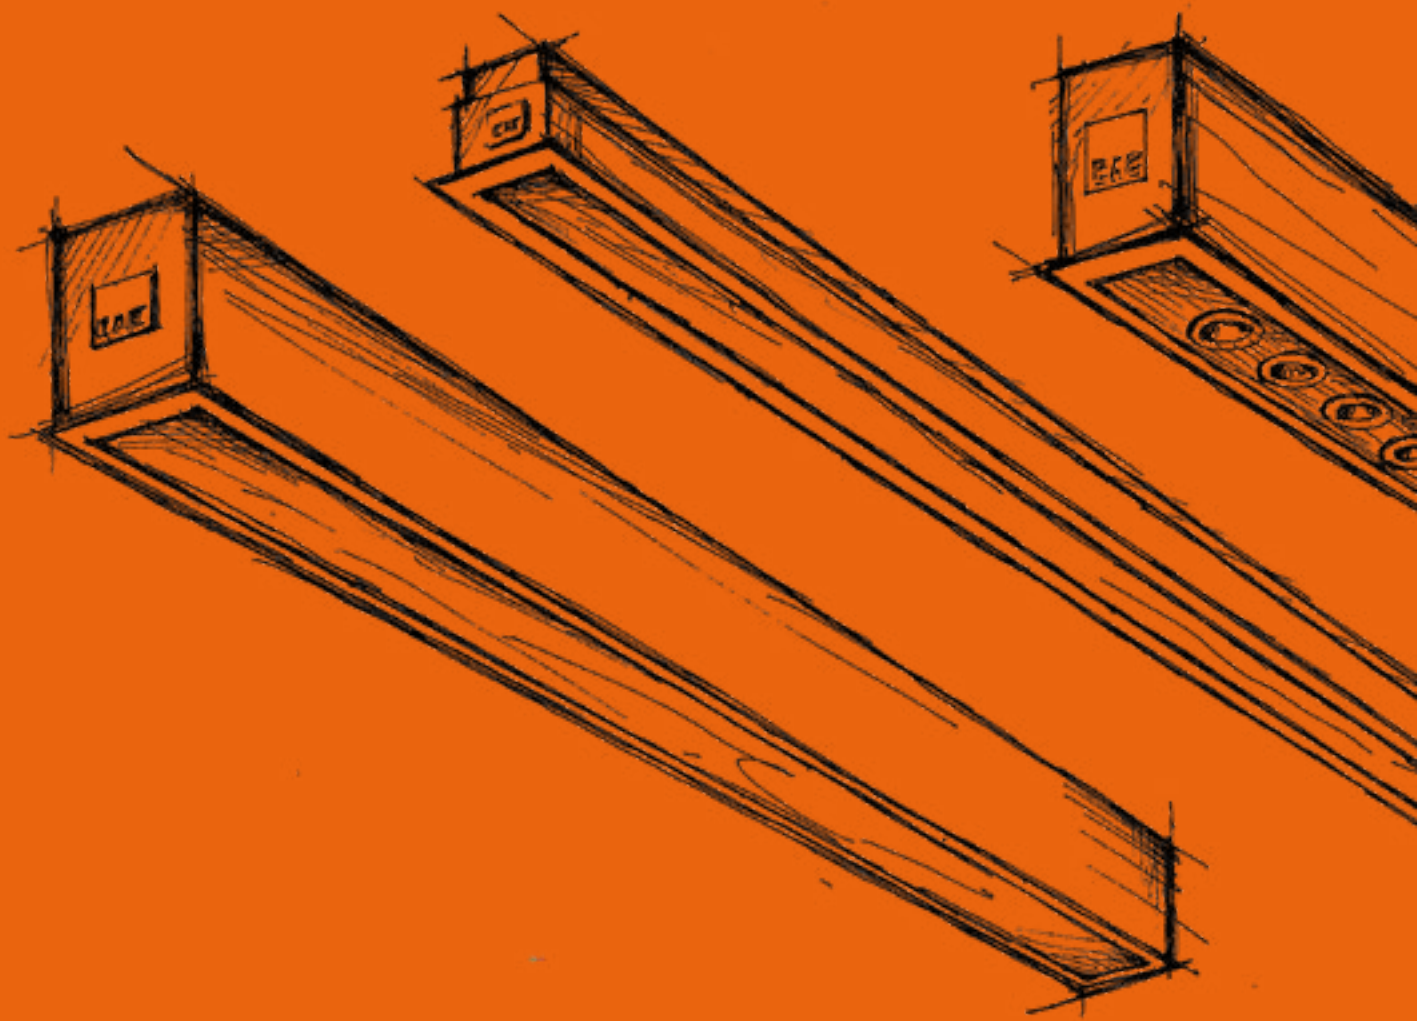

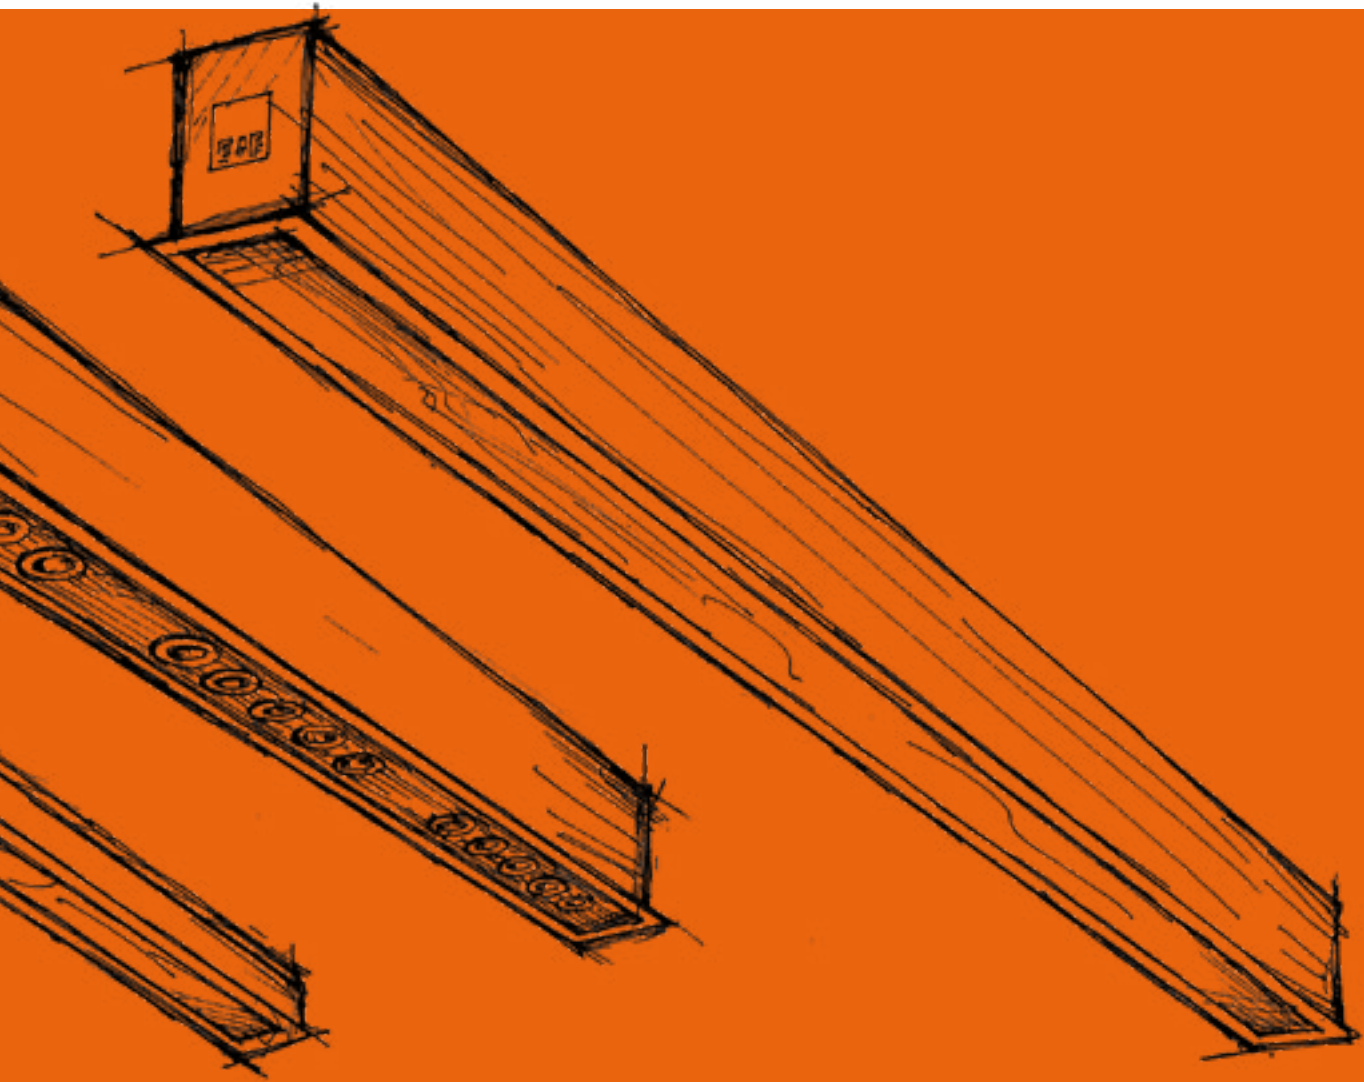

LINEAR LED LIGHTING LUMINAIRES

STL Surface Mounted / Pendant



LINEAR LED LIGHTING SYSTEM




“ STL can be used as a single module or combined in long lines to obtain an uninterrupted linear lighting system. In addition to being able to be used on the surface, it also brings a stylish touch to your living spaces as a pendant luminaire thanks to its mounting accessories. STL creates a new atmosphere in the area where it is used and provides uninterrupted lighting needed by your architectural areas. ”


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Extrusion Body |
| Optic | : Opal Diffuser |
| Light Source | : Mid Power LED |
| Power Consumption | : 20W / 30W / 40W / 50W / 60W / 65W |
| Lumen | : 1938 lm / 2900 lm / 3875 lm / 4845 lm / 5815 lm / 6300 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Surface Mounted / Pendant |
| Housing Colour | : RAL 9005 / RAL 7047 |

Technical Drawing

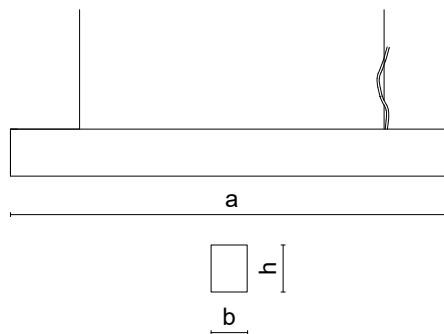

Photometric Data



Dimensions (mm)

Single Modules 500x700

| | a | b | h |
|-----|------|----|----|
| 20W | 600 | 50 | 70 |
| 30W | 900 | 50 | 70 |
| 40W | 1200 | 50 | 70 |
| 50W | 1500 | 50 | 70 |
| 60W | 1800 | 50 | 70 |
| 65W | 2000 | 50 | 70 |

Single Modules 650x850

| | a | b | h |
|-----|------|----|----|
| 20W | 600 | 65 | 85 |
| 30W | 900 | 65 | 85 |
| 40W | 1200 | 65 | 85 |
| 50W | 1500 | 65 | 85 |
| 60W | 1800 | 65 | 85 |
| 65W | 2000 | 65 | 85 |

BS-SN Modules 650x850

| | a | b | h |
|-----|------|----|----|
| 20W | 600 | 65 | 85 |
| 30W | 900 | 65 | 85 |
| 40W | 1200 | 65 | 85 |
| 50W | 1500 | 65 | 85 |
| 60W | 1800 | 65 | 85 |
| 65W | 2000 | 65 | 85 |
| 80W | 2400 | 65 | 85 |

AR Modules 650x850

| | a | b | h |
|-----|------|----|----|
| 30W | 900 | 65 | 85 |
| 40W | 1200 | 65 | 85 |
| 50W | 1500 | 65 | 85 |


Options

| | |
|--------------------|---------------------------------|
| Emergency Kit | : Yes (1-3 Hours) (except 60cm) |
| DALI Compatibility | : Yes |





LINEAR LED LIGHTING SYSTEM

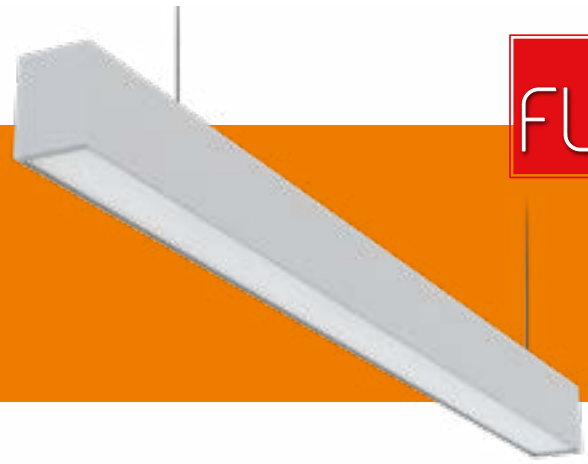


STL, which has an advanced body and a modular structure, can operate as a single module as well as long uninterrupted lines can also be created. STL, which can provide output of light both ways up and down. It also has different body length options.




Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Extrusion Body |
| Optic | : Opal Diffuser |
| Light Source | : Mid Power LED |
| Power Consumption | : 900mm - 45W / 1200mm - 60W / 1500mm - 75W |
| Direct | : 900mm - 27W / 1200mm - 36W / 1500mm - 45W |
| Indirect | : 900mm - 18W / 1200mm - 24W / 1500mm - 30W |
| Direct Lumen | : 2616 lm / 3488 lm / 4360 lm |
| Indirect Lumen | : 1744 lm / 2325 lm / 2907 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Pendant |
| Housing Colour | : RAL 9005 / RAL 7047 |

Technical Drawing

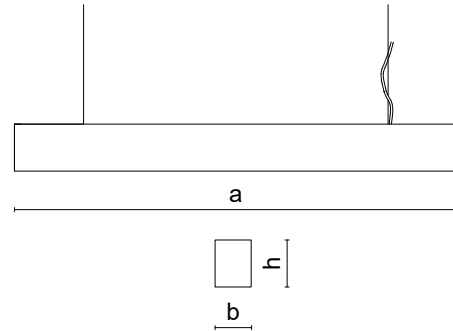

Photometric Data



Options

| | |
|--------------------|---------------------------------|
| Emergency Kit | : Yes (1-3 Hours) (except 60cm) |
| DALI Compatibility | : Yes |

Dimensions (mm)

Single Modules

| | a | b | h |
|-------|------|----|----|
| 45 W | 900 | 65 | 88 |
| 60 W | 1200 | 65 | 88 |
| 75 W | 1500 | 65 | 88 |
| 90 W | 1800 | 65 | 88 |
| 100 W | 2000 | 65 | 88 |
| 140 W | 2800 | 65 | 88 |
| 150 W | 3000 | 65 | 88 |

BS-SN Modules

| | a | b | h |
|------|-----|----|----|
| 60 W | 120 | 65 | 88 |
| 75 W | 150 | 65 | 88 |

AR Modules

| | a | b | h |
|------|-----|----|----|
| 60 W | 120 | 65 | 88 |
| 75 W | 150 | 65 | 88 |

STL Recessed Mounted



LINEAR LED LIGHTING SYSTEM




Having a modular structure, STL Recessed Mounted can operate as a single module or can be created as long uninterrupted lines. Thanks to its opal diffuser, it provides light homogeneously and without tiring the eyes.




Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Extrusion Body |
| Optic | : Opal Diffuser |
| Light Source | : Mid Power LED |
| Power Consumption | : 20W / 30W / 40W / 50W / 60W / 65W |
| Lumen | : 1938 lm / 2900 lm / 3875 lm / 4845 lm / 5815 lm / 6300 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Recessed Mounted |
| Housing Colour | : RAL 9005 / RAL 7047 |

Technical Drawing

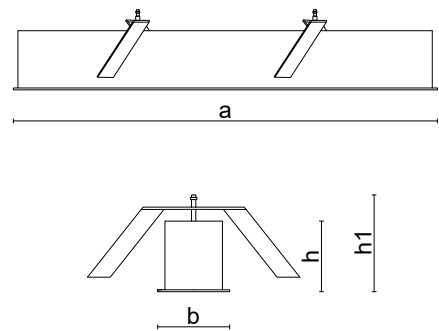

Photometric Data



Dimensions (mm)

Single Modules

| | a | b | h | h1 |
|-----------|------|----|----|-----|
| 10W - 20W | 617 | 67 | 70 | 100 |
| 14W - 30W | 917 | 67 | 70 | 100 |
| 19W - 40W | 1217 | 67 | 70 | 100 |
| 24W - 50W | 1517 | 67 | 70 | 100 |
| 29W - 60W | 1817 | 67 | 70 | 100 |
| 31W - 65W | 2017 | 67 | 70 | 100 |

BS-SN Modules

| | a | b | h | h1 |
|-----------|------|----|----|-----|
| 19W - 40W | 1208 | 67 | 70 | 100 |
| 24W - 50W | 1508 | 67 | 70 | 100 |
| 29W - 60W | 1808 | 67 | 70 | 100 |

AR Modules

| | a | b | h | h1 |
|-----------|------|----|----|-----|
| 19W - 40W | 1200 | 67 | 70 | 100 |
| 24W - 50W | 1500 | 67 | 70 | 100 |
| 29W - 60W | 1800 | 67 | 70 | 100 |

Ceiling Cut-Out Dimensions

| | | |
|-----------|---------------|-----------|
| 10W - 20W | Single Module | 604 x 54 |
| 14W - 30W | Single Module | 904 x 54 |
| 19W - 40W | Single Module | 1204 x 54 |
| 24W - 50W | Single Module | 1504 x 54 |
| 29W - 60W | Single Module | 1804 x 54 |
| 31W - 65W | Single Module | 2004 x 54 |

Options

| | |
|--------------------|---------------------------------|
| Emergency Kit | : Yes (1-3 Hours) (except 60cm) |
| DALI Compatibility | : Yes |





LINEAR LED LIGHTING SYSTEM




TORNADO WATERPROOF is ideal for projects that require a balanced combination of economy and energy efficiency with its traditional body structure. Having various lumen packages and different size options provides flexibility to the user. In addition to providing full protection in humid areas with its IP66 protection class; It provides easy installation with its surface-mounted design. It achieves a more homogeneous light output with its polycarbonate opal cover.


Technical Specifications

| | |
|-------------------|--------------------------------|
| Housing | : Polycarbonate Body |
| Optic | : Polycarbonate opal cover |
| Light Source | : Mid Power LED |
| Power Consumption | |
| 120 cm | : 30W / 40W / 50W |
| 150 cm | : 50W / 60W / 70W / 80W |
| Lumen | |
| 120 cm | : 4050 lm / 5400 lm / 6750 lm |
| 120 cm | : 6750 lm / 8100 lm / 10800 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K |
| CRI | : > 80 |
| IP | : IP66 |
| Mounting Type | : Surface Mounted |
| Housing Colour | : RAL 9003 |

Technical Drawing

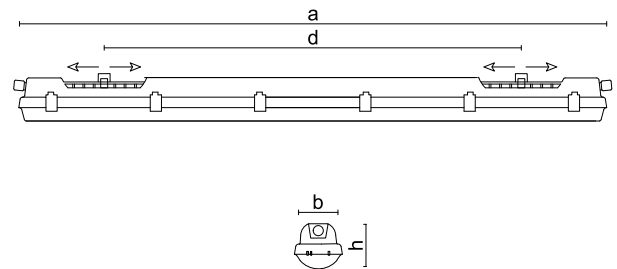

Photometric Data



Dimensions (mm)

TRS Waterproof 1200mm

| | a | b | h | d |
|------|------|----|----|-----------|
| 30 W | 1175 | 98 | 84 | 700 - 960 |
| 40 W | 1175 | 98 | 84 | 700 - 960 |
| 50 W | 1175 | 98 | 84 | 700 - 960 |

TRS Waterproof 1500mm

| | a | b | h | d |
|------|------|----|----|------------|
| 50 W | 1455 | 98 | 84 | 970 - 1230 |
| 60 W | 1455 | 98 | 84 | 970 - 1230 |
| 70 W | 1455 | 98 | 84 | 970 - 1230 |
| 80 W | 1455 | 98 | 84 | 970 - 1230 |

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |



LINEAR LED LIGHTING SYSTEM




“The renewed LINA NG stands out with its professional LED technology and offers the perfect harmony of energy saving and efficiency. LINA NG has IP66 protection class; It is a reliable option for parking lots, warehouse areas, production lines and humid areas.”


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Extrusion Body |
| Optic | : Opal Diffuser |
| Light Source | : LED |
| Power Consumption | : 25W / 30W / 34W / 41W / 55W / 64W / 73W / 84W |
| Lumen | : 2800 lm / 3945 lm / 4453 lm / 5407 lm / 6400 lm / 7300 lm / 8200 lm / 8900 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP66 |
| Mounting Type | : Surface Mounted |
| Housing Colour | : RAL 9006 |

Technical Drawing

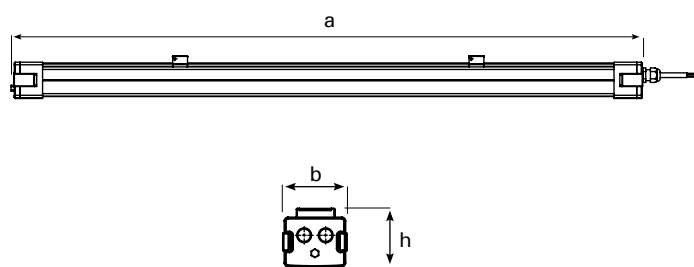

Photometric Data





Dimensions (mm)

| | a | b | h |
|------|------|----|----|
| 1200 | 1200 | 85 | 70 |
| 1500 | 1500 | 85 | 70 |

Options

| | |
|--------------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| DALI Compatibility | : Yes |

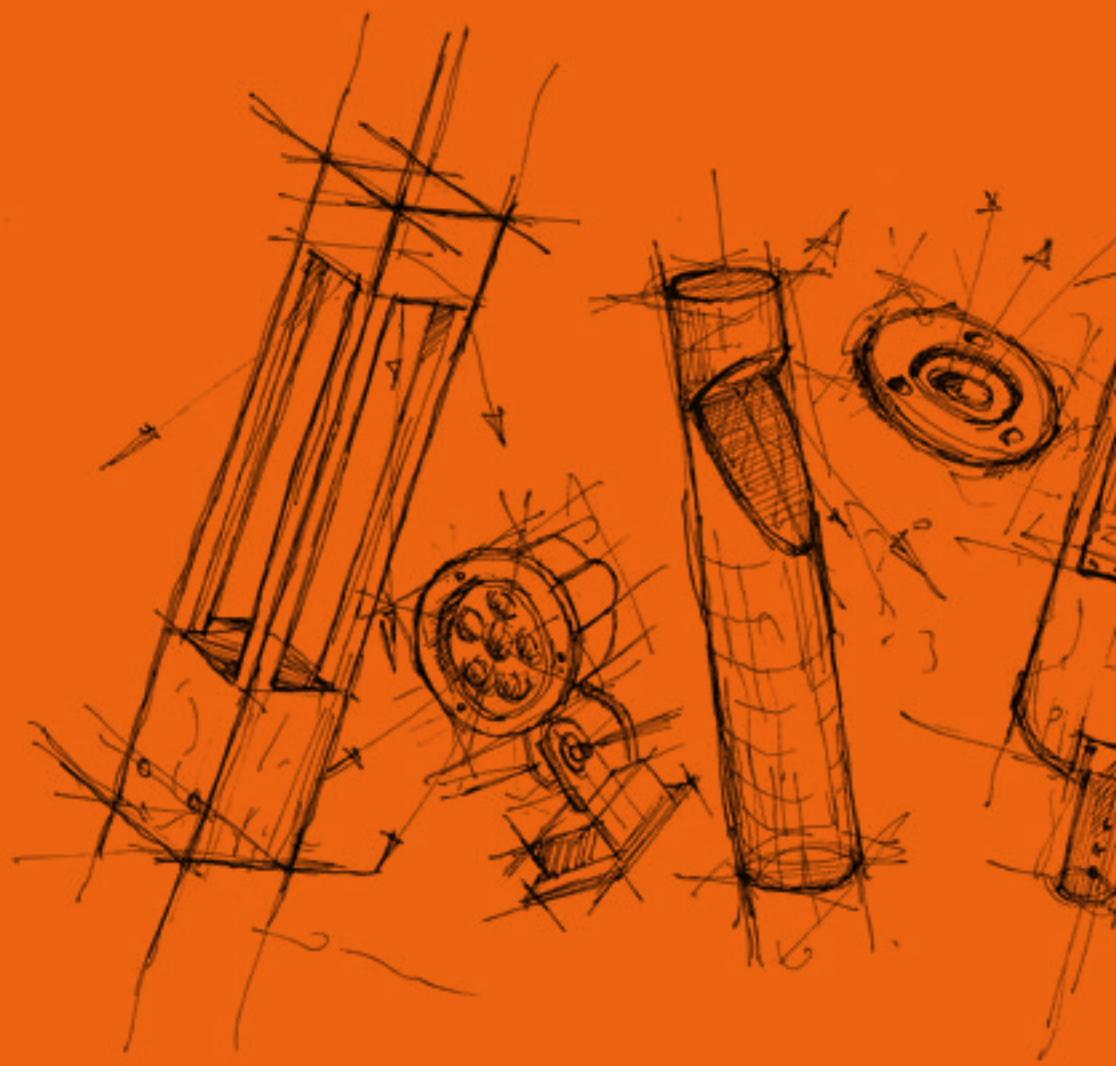

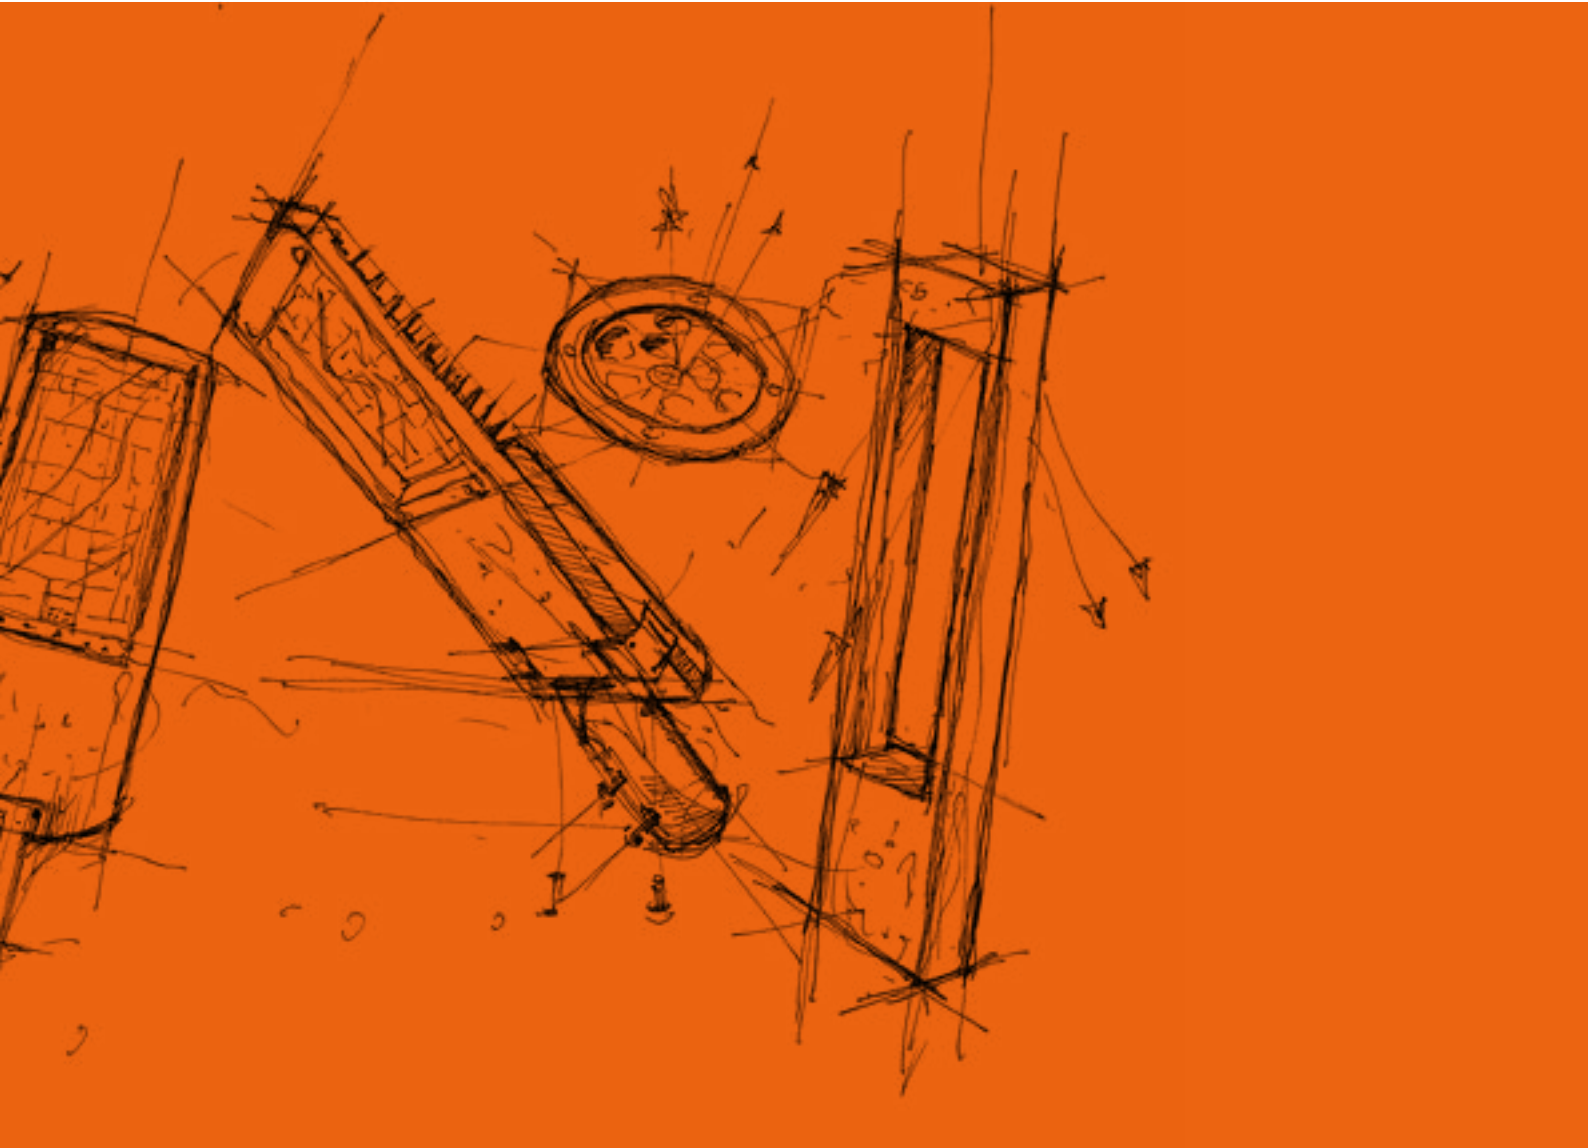

LANDSCAPING LUMINAIRES



Capello | Bollard



Dimensions (mm)

| h | a | Lumen | Power |
|------|-----|-------|-------|
| 300 | 160 | 470 | 15 W |
| 500 | 160 | 470 | 15 W |
| 750 | 160 | 470 | 15 W |
| 1000 | 160 | 470 | 15 W |


Technical Specifications

- Housing : Aluminium Body (Chromate Coated)
- Optic : Acrylic Diffuser
- Light Source : SMD LED
- Input Voltage : 220-240V AC 50/60Hz
- Color Temperature : 3000K / 4000K / 6500K
- CRI : > 80
- IP : IP66
- Mounting Type : Ground Mounted
- Housing Colour : RAL 7016


Options

- Emergency Kit : None
- DALI Compatibility : Yes

Technical Drawing

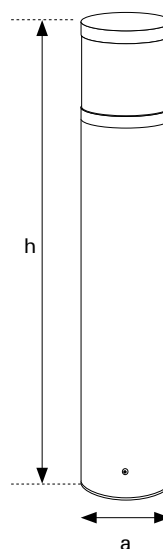

Photometric Data

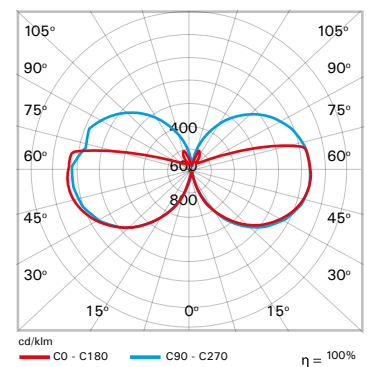



Capello | Pole



LED
IP66
⏚
DALI

Dimensions (mm)

| h | a | Lumen | Power |
|------|-----|-------|-------|
| 3000 | 160 | 877 | 28W |


Technical Specifications

- Housing : Aluminium Body (Chromate Coated)
- Optic : Acrylic Diffuser
- Light Source : SMD LED
- Input Voltage : 220-240V AC 50/60Hz
- Color Temperature : 3000K / 4000K / 6500K
- CRI : > 80
- IP : IP66
- Mounting Type : Ground Mounted
- Housing Colour : RAL 7016


Options

- Emergency Kit : None
- DALI Compatibility : Yes

Technical Drawing

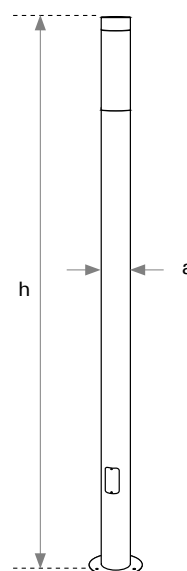

Photometric Data

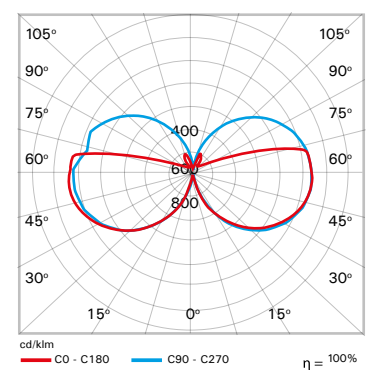



Tower | Bollard



Dimensions (mm)

| h | axb | Lumen | Power |
|------|---------|-------|-------|
| 300 | 200x200 | 789 | 15 W |
| 500 | 150x150 | 789 | 15 W |
| 750 | 150x150 | 789 | 15 W |
| 1000 | 150x150 | 789 | 15 W |


Technical Specifications

- Housing : Aluminium Body (Chromate Coated)
- Optic : 4mm Tempered Glass
- Light Source : COB LED
- Input Voltage : 220-240V AC 50/60Hz
- Color Temperature : 3000K / 4000K / 6500K
- CRI : > 80
- IP : IP66
- Mounting Type : Ground Mounted
- Housing Colour : RAL 7016


Options

- Emergency Kit : None
- DALI Compatibility : Yes

Technical Drawing

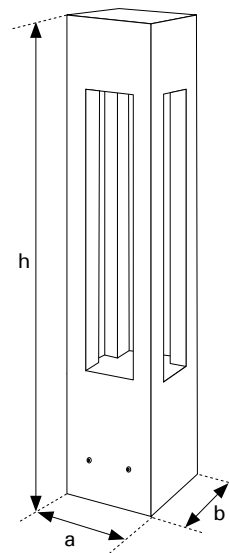

Photometric Data

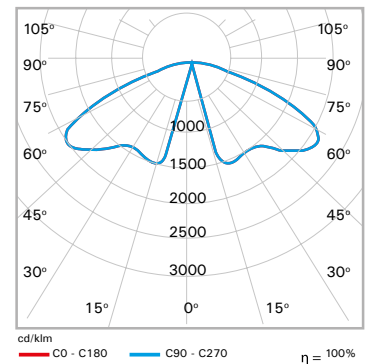



Tower | Pole



Dimensions (mm)

| h | axb | Lumen | Power |
|------|---------|-------|-------|
| 3000 | 180x180 | 1052 | 20W |
| 4000 | 200x200 | 4060 | 35W |


Technical Specifications

- Housing : Aluminium Body (Chromate Coated)
- Optic : 4mm Tempered Glass
- Light Source : COB LED, SMD LED
- Input Voltage : 220-240V AC 50/60Hz
- Color Temperature : 3000K / 4000K / 6500K
- CRI : > 80
- IP : IP66
- Mounting Type : Ground Mounted
- Housing Colour : RAL 7016


Options

- Emergency Kit : None
- DALI Compatibility : Yes

Technical Drawing

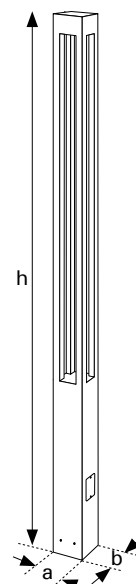

Photometric Data

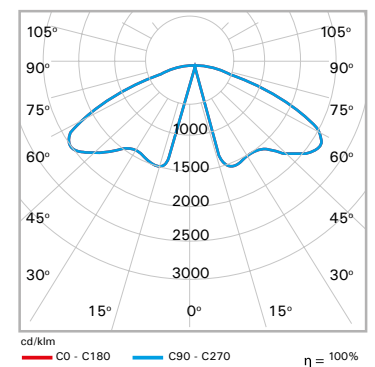



Carmelo | Bollard



Dimensions (mm)

| h | a | Lumen | Power |
|------|-----|-------|-------|
| 300 | 150 | 1032 | 15 W |
| 500 | 150 | 1032 | 15 W |
| 750 | 150 | 1032 | 15 W |
| 1000 | 150 | 1032 | 15 W |


Technical Specifications

- Housing : Aluminium Body (Chromate Coated)
- Optic : 4mm Tempered Glass
- Light Source : COB LED
- Input Voltage : 220-240V AC 50/60Hz
- Color Temperature : 3000K / 4000K / 6500K
- CRI : > 80
- IP : IP66
- Mounting Type : Ground Mounted
- Housing Colour : RAL 7016


Options

- Emergency Kit : None
- DALI Compatibility : Yes

Technical Drawing

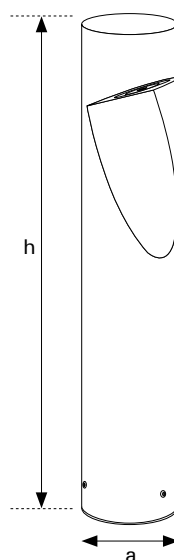

Photometric Data

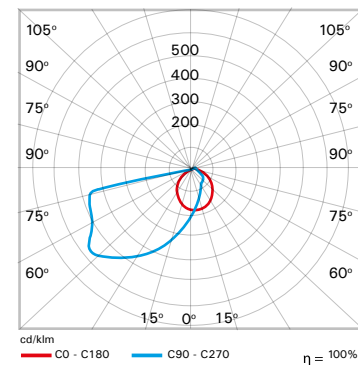



Carmelo | Pole



Dimensions (mm)

| A | ØB | Lumen | Power |
|------|-----|-------|-------|
| 3000 | 160 | 3097 | 3x15W |
| 4000 | 160 | 4128 | 3x20W |
| 5000 | 200 | 12180 | 3x35W |


Technical Specifications

- Housing : Aluminium Body (Chromate Coated)
- Optic : 4mm Tempered Glass, Lens
- Light Source : COB LED, SMD LED
- Input Voltage : 220-240V AC 50/60Hz
- Color Temperature : 3000K / 4000K / 6500K
- CRI : > 80
- IP : IP66
- Mounting Type : Ground Mounted
- Housing Colour : RAL 7016


Options

- Emergency Kit : None
- DALI Compatibility : Yes

Technical Drawing

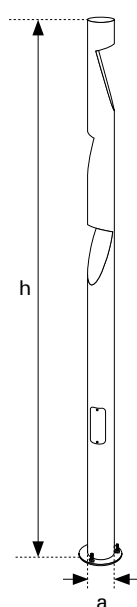

Photometric Data

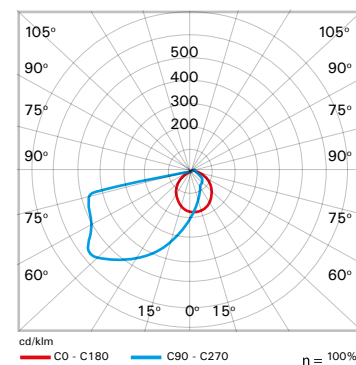



City | Bollard



Dimensions (mm)

| h | a | bxc | Lumen | Power |
|------|-----|---------|-------|-------|
| 300 | 250 | 80 x150 | 994 | 15 W |
| 500 | 250 | 80 x150 | 994 | 15 W |
| 750 | 250 | 80 x150 | 994 | 15 W |
| 1000 | 250 | 80 x150 | 994 | 15 W |


Technical Specifications

- Housing : Aluminium Body (Chromate Coated)
- Optic : 4mm Tempered Glass
- Light Source : COB LED
- Input Voltage : 220-240V AC 50/60Hz
- Color Temperature : 3000K / 4000K / 6500K
- CRI : > 80
- IP : IP66
- Mounting Type : Ground Mounted
- Housing Colour : RAL 7016


Options

- Emergency Kit : None
- DALI Compatibility : Yes

Technical Drawing

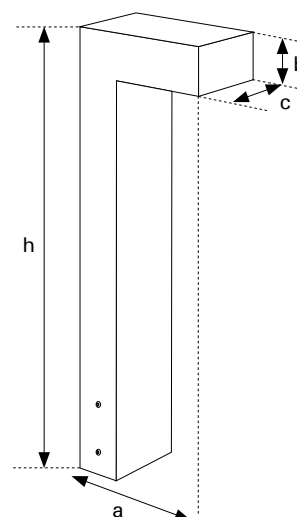

Photometric Data

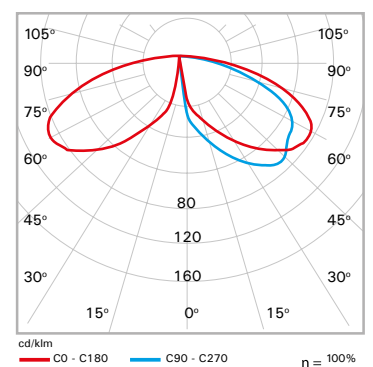



City L | Pole



Dimensions (mm)

| h | a | bxc | Lumen | Power |
|------|------|---------|-------|-------|
| 3000 | 680 | 80x150 | 4060 | 35W |
| 4000 | 850 | 100x150 | 4060 | 35W |
| 5000 | 850 | 100x200 | 8120 | 70W |
| 6000 | 1100 | 100x200 | 8120 | 70W |


Technical Specifications

- Housing : Aluminium Body (Chromate Coated)
- Optic : Lens
- Light Source : SMD LED
- Input Voltage : 220-240V AC 50/60Hz
- Color Temperature : 3000K / 4000K / 6500K
- CRI : > 80
- IP : IP66
- Mounting Type : Ground Mounted
- Housing Colour : RAL 7016


Options

- Emergency Kit : None
- DALI Compatibility : Yes

Technical Drawing

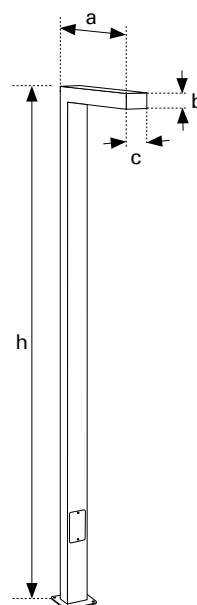

Photometric Data

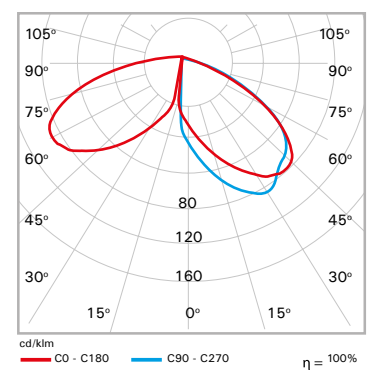



City S | Wall Light



Dimensions (mm)

| h | b | c | Lumen | Power |
|-----|-----|----|-------|-------|
| 500 | 150 | 80 | 994 | 15 W |


Technical Specifications

- Housing : Aluminium Body (Chromate Coated)
- Optic : 4mm Tempered Glass
- Light Source : COB LED
- Input Voltage : 220-240V AC 50/60Hz
- Color Temperature : 3000K / 4000K / 6500K
- CRI : > 80
- IP : IP66
- Mounting Type : Wall Mounted
- Housing Colour : RAL 7016


Options

- Emergency Kit : None
- DALI Compatibility : Yes

Technical Drawing

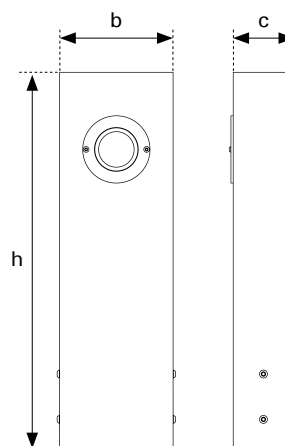

Photometric Data

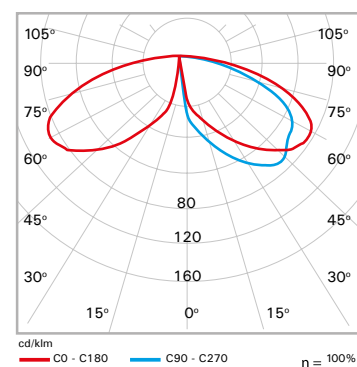



City L | Wall Light



Dimensions (mm)

| A | B | C | Lumen | Power |
|-----|-----|----|-------|-------|
| 600 | 150 | 80 | 4060 | 35 W |


Technical Specifications

| | |
|-------------------|------------------------------------|
| Housing | : Aluminium Body (Chromate Coated) |
| Optic | : Lens |
| Light Source | : SMD LED |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP66 |
| Mounting Type | : Ground Mounted |
| Housing Colour | : RAL 7016 |


Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |

Technical Drawing

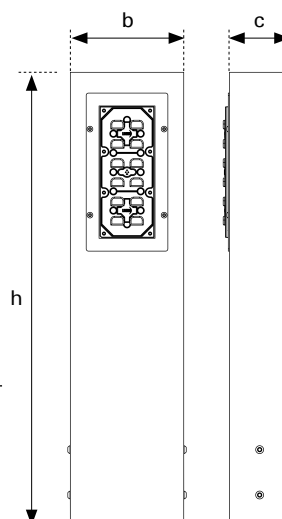

Photometric Data

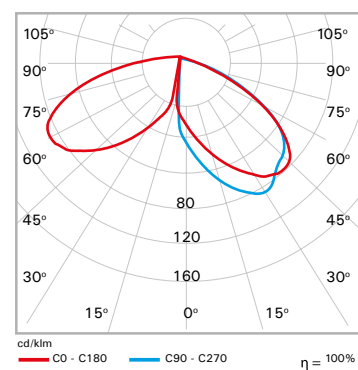



City T | Pole



Dimensions (mm)

| h | a | bxc | Lumen | Power |
|------|------|---------|-------|-------|
| 3000 | 1280 | 80x150 | 8120 | 2x35W |
| 4000 | 1600 | 100x150 | 8120 | 2x35W |
| 5000 | 1600 | 100x200 | 16240 | 2x70W |
| 6000 | 2100 | 100x200 | 16240 | 2x70W |


Technical Specifications

- Housing : Aluminium Body (Chromate Coated)
- Optic : Lens
- Light Source : SMD LED
- Input Voltage : 220-240V AC 50/60Hz
- Color Temperature : 3000K / 4000K / 6500K
- CRI : > 80
- IP : IP66
- Mounting Type : Ground Mounted
- Housing Colour : RAL 7016


Options

- Emergency Kit : None
- DALI Compatibility : Yes

Technical Drawing

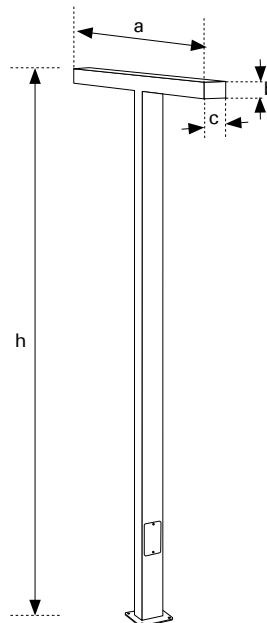

Photometric Data

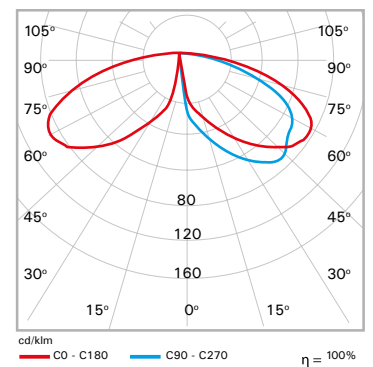



City F | Pole



Dimensions (mm)

| h | a | bxc | Lumen | Power |
|------|------|---------|-------|---------|
| 3000 | 1280 | 80x150 | 8210 | 35W-35W |
| 4000 | 1600 | 100x150 | 8210 | 35W-35W |
| 5000 | 1600 | 100x200 | 12180 | 35W-70W |
| 6000 | 1850 | 100x200 | 12180 | 35W-70W |


Technical Specifications

- Housing : Aluminium Body (Chromate Coated)
- Optic : Lens
- Light Source : SMD LED
- Input Voltage : 220-240V AC 50/60Hz
- Color Temperature : 3000K / 4000K / 6500K
- CRI : > 80
- IP : IP66
- Mounting Type : Ground Mounted
- Housing Colour : RAL 7016


Options

- Emergency Kit : None
- DALI Compatibility : Yes

Technical Drawing

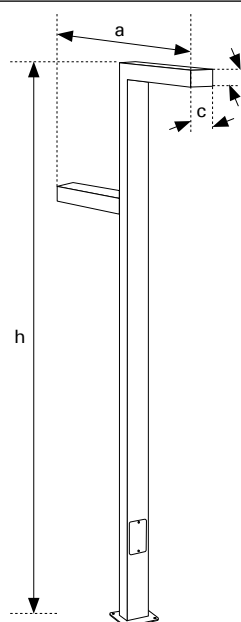

Photometric Data

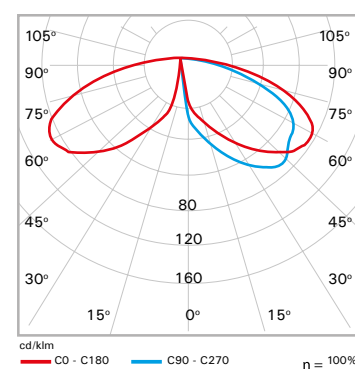



Bridge | Bollard



Dimensions (mm)

| h | axb | Lumen | Power |
|------|---------|-------|-------|
| 300 | 100x240 | 752 | 15 W |
| 500 | 100x240 | 752 | 15 W |
| 750 | 100x240 | 752 | 15 W |
| 1000 | 100x240 | 752 | 15 W |


Technical Specifications

| | |
|-------------------|------------------------------------|
| Housing | : Aluminium Body (Chromate Coated) |
| Optic | : 4mm Tempered Glass |
| Light Source | : COB LED |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP66 |
| Mounting Type | : Ground Mounted |
| Housing Colour | : RAL 7016 |


Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |

Technical Drawing

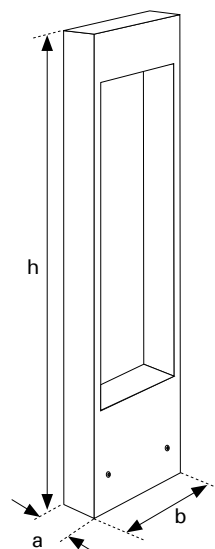

Photometric Data

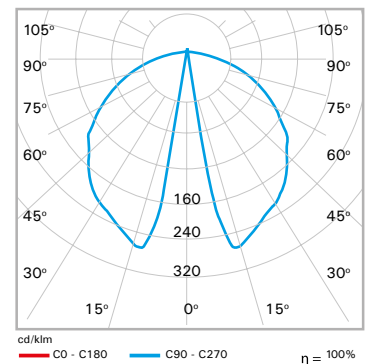



Bridge | Pole



Dimensions (mm)

| h | axb | Lumen | Power |
|------|---------|-------|-------|
| 3000 | 100x240 | 1003 | 20W |
| 4000 | 100x280 | 4060 | 35W |


Technical Specifications

- Housing : Aluminium Body (Chromate Coated)
- Optic : 4mm Tempered Glass, Lens
- Light Source : COB LED, SMD LED
- Input Voltage : 220-240V AC 50/60Hz
- Color Temperature : 3000K / 4000K / 6500K
- CRI : > 80
- IP : IP66
- Mounting Type : Ground Mounted
- Housing Colour : RAL 7016


Options

- Emergency Kit : None
- DALI Compatibility : Yes

Technical Drawing



Photometric Data

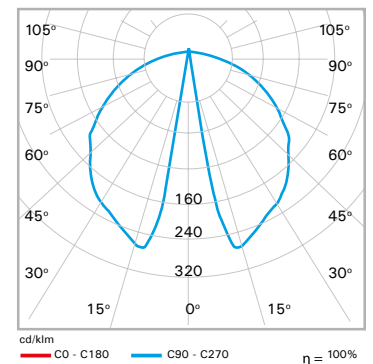



City NG | Bollard



Dimensions (mm)

| h | a | bxc | Lumen | Power |
|------|-----|---------|-------|-------|
| 300 | 250 | 60 x120 | 663 | 10 W |
| 500 | 250 | 60 x120 | 663 | 10 W |
| 750 | 250 | 60 x120 | 663 | 10 W |
| 1000 | 250 | 60 x120 | 663 | 10 W |


Technical Specifications

- Housing : Aluminium Body (Chromate Coated)
- Optic : 4mm Tempered Glass
- Light Source : COB LED
- Input Voltage : 220-240V AC 50/60Hz
- Color Temperature : 4000K
- CRI : > 80
- IP : IP65
- Mounting Type : Ground Mounted
- Housing Colour : RAL 7016


Options

- Emergency Kit : None
- DALI Compatibility : None

Technical Drawing

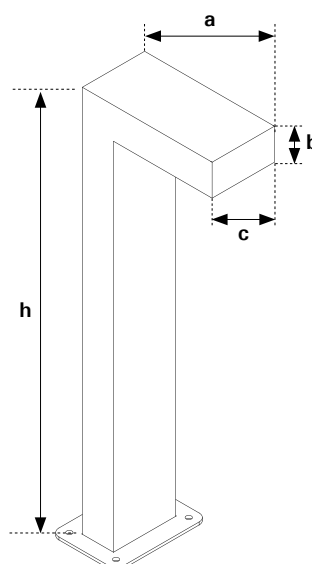

Photometric Data

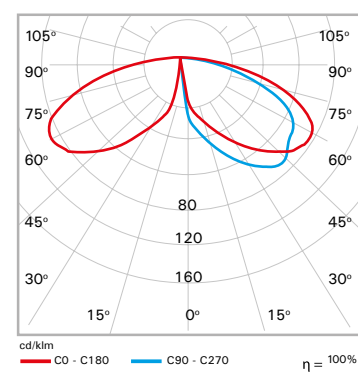



Tower NG | Bollard



Dimensions (mm)

| h | axb | Lumen | Power |
|------|---------|-------|-------|
| 300 | 120x120 | 526 | 10 W |
| 500 | 120x120 | 526 | 10 W |
| 750 | 120x120 | 526 | 10 W |
| 1000 | 120x120 | 526 | 10 W |


Technical Specifications

- Housing : Aluminium Body (Chromate Coated)
- Optic : 4mm Tempered Glass
- Light Source : COB LED
- Input Voltage : 220-240V AC 50/60Hz
- Color Temperature : 4000K
- CRI : > 80
- IP : IP65
- Mounting Type : Ground Mounted
- Housing Colour : RAL 7016


Options

- Emergency Kit : None
- DALI Compatibility : None

Technical Drawing

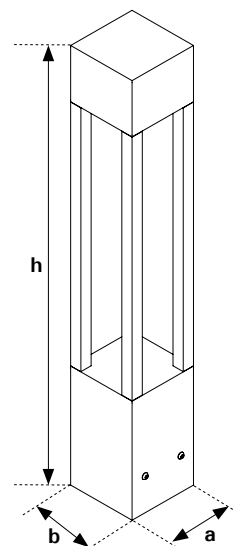

Photometric Data

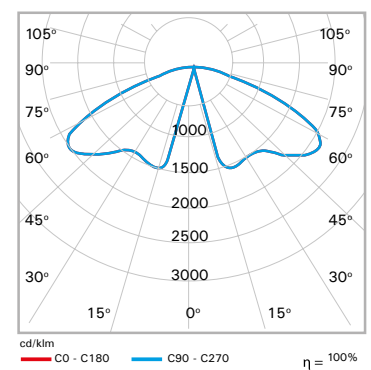

HORUS-1



PERIMETER LANDSCAPE LUMINAIRE




HORUS 1, which allows you to have advanced LED technology and energy saving at affordable costs, is perfect for illuminating outdoor spaces with its durable body structure. Designed in accordance with TEDAS specifications, the back cover of HORUS 1 allows the driver to be replaced easily.


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Injection Housing |
| Optic | : 100° / 110° Lens |
| Light Source | : Mid Power LED |
| Power Consumption | : 32W / 54W / 63W / 87W / 115W |
| Lumen | : 4238 lm / 6626 lm / 7483 lm / 10222 lm / 15036 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 5000K / 5700K / 6500K |
| CRI | : > 80 |
| IP | : IP66 |
| Mounting Type | : Pillar |
| Housing Colour | : SW306G Smoked Gray |

Technical Drawing

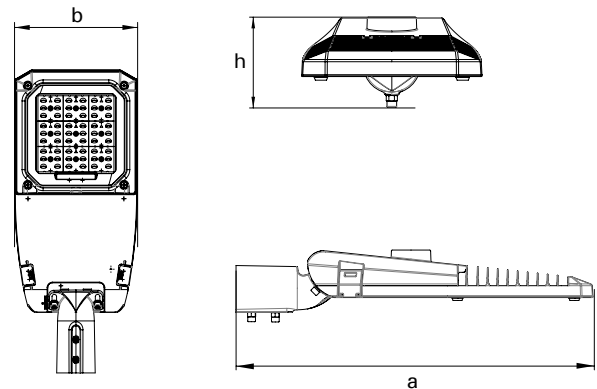

Photometric Data

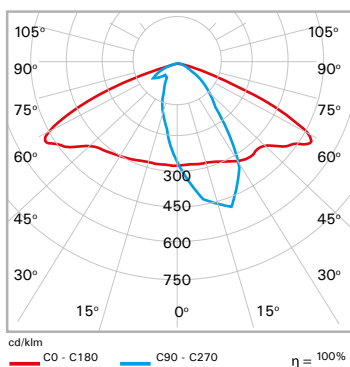

Dimensions (mm)

| a | b | h |
|-----|-----|-----|
| 601 | 243 | 120 |

Options

| | |
|---------------------|-------|
| DALI Compatibility | : Yes |
| DIMKO Compatibility | : Yes |



HORUS-2



PERIMETER LANDSCAPE LUMINAIRE




Featuring the latest LED technology, HORUS 2 can be used for outdoor lighting with its durable body structure. HORUS, which has an aesthetic appearance, is designed in accordance with TEDAS conditions. HORUS 2, which allows easy driver replacement thanks to its back cover, meets the lighting needs in many areas in the best way with all these features.


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Injection Housing |
| Optic | : 100° Lens |
| Light Source | : Mid Power LED |
| Power Consumption | : 86W / 113W / 130W / 153W / 170W |
| Lumen | : 10997 lm / 13980 lm / 15653 lm / 17988 lm / 23044 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 5000K / 5700K / 6500K |
| CRI | : > 80 |
| IP | : IP66 |
| Mounting Type | : Pillar |
| Housing Colour | : SW306G Smoked Gray |

Technical Drawing

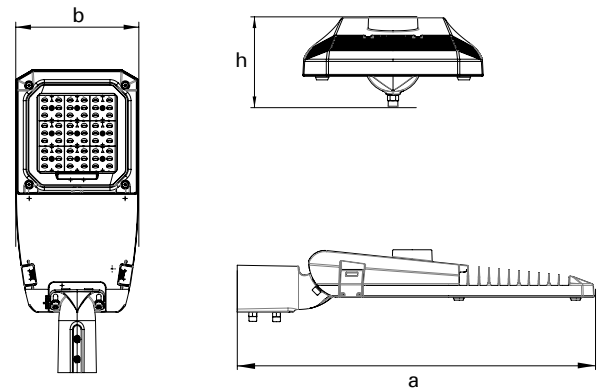

Photometric Data

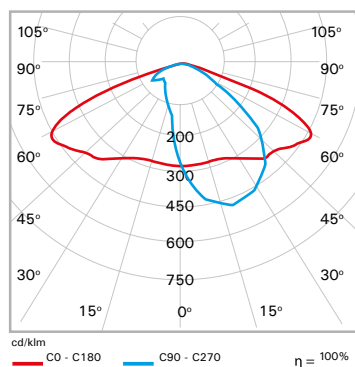

Dimensions (mm)

| a | b | h |
|-----|-----|-----|
| 721 | 313 | 120 |

Options

| | |
|---------------------|-------|
| DALI Compatibility | : Yes |
| DIMKO Compatibility | : Yes |



PERIMETER LANDSCAPE LUMINAIRE




“ Equipped with high-performance LED technology, OSIRIS provides maximum efficiency. It provides full protection against dust and splashes with its IP66 protection class. In addition to being extremely resistant to external factors with its IK08 impact resistance, it has tempered transparent glass. OSIRIS perfectly meets the requirements of outdoor lighting with operating temperatures from -20°C to +40°C. ”


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Injection Housing, Aluminium Injection Cover |
| Optic | : 60° Lens |
| Light Source | : Power LED |
| Power Consumption | : 250W / 272W / 310W / 355W / 415W |
| Lumen | : 30000 lm / 33000 lm / 36000 lm / 40000 lm / 45000 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 5000K / 5700K / 6500K |
| CRI | : > 80 |
| IP | : IP66 |
| Mounting Type | : Pillar |
| Housing Colour | : RAL 9005 / RAL 7047 |

Technical Drawing

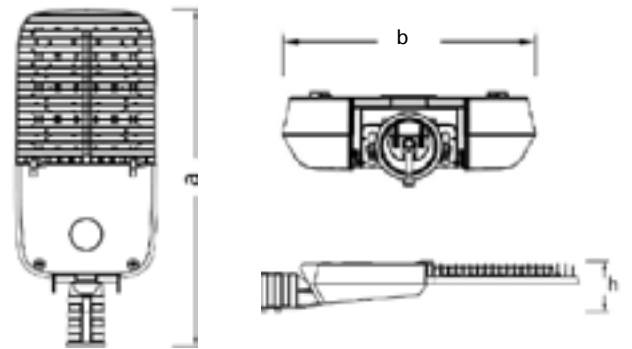

Photometric Data



Dimensions (mm)

| a | b | h |
|-----|-----|-----|
| 910 | 320 | 112 |

Options

| | |
|---------------------|-------|
| DALI Compatibility | : Yes |
| DIMKO Compatibility | : Yes |

PERIMETER LANDSCAPE LUMINAIRE




“Designed for the best form of street lighting, ALBA allows you to have the energy savings provided by LED technology at affordable costs. ALBA, which will exhibit the best performance in outdoor conditions, emphasizes the unique texture and beauty of the buildings with the use of correct light and offers a lighting experience beyond your expectations.”


Technical Specifications

| | |
|-------------------|-------------------------------|
| Housing | : Aluminium Injection Housing |
| Optic | : 100° Lens |
| Light Source | : Mid Power LED |
| Consumption Power | : 50W / 60W |
| Lumen | : 8405 lm / 10015 lm |
| Input Voltage | : 220-240V AC 50/60 Hz |
| Color Temperature | : 4000K / 6500K |
| CRI | : > 70 |
| IP | : IP66 |
| Mounting Type | : Pole |
| Housing Colour | : RAL 9005 |

Technical Drawing

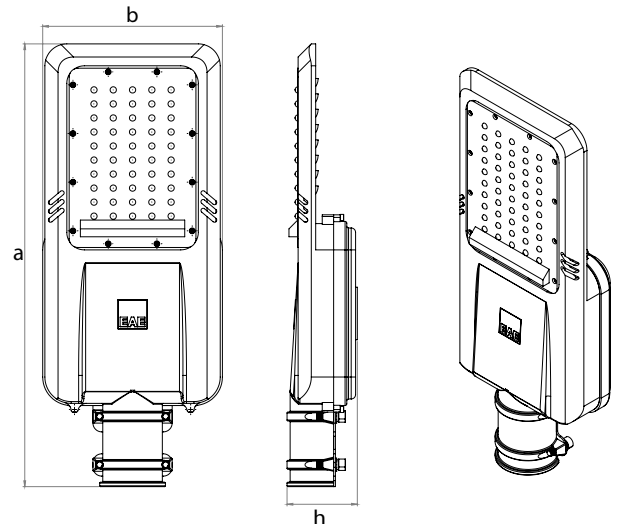

Photometric Data



Dimensions (mm)

| a | b | h |
|-----|-----|----|
| 505 | 205 | 80 |

Options

DALI Compatibility : Yes

PERIMETER LANDSCAPE LUMINAIRE




“VALERIA offers a solution to the lighting needs of large areas. It has a strong structure with IK08 impact resistance and IP66 protection class, so it is ideal for outdoor lighting in long-term use. It has a wide range of uses, from sports facilities, airport aprons and port loading areas to tunnels.”


Technical Specifications

| | |
|-------------------|---|
| Housing | : Aluminium Injection Housing |
| Optic | : 60° / 90° LED |
| Light Source | : Power LED / Mid Power LED |
| Consumption Power | : 45W / 100W / 144W / 193W / 292W |
| Lumen | : 5616 lm / 13398 lm / 18832 lm / 25524 lm / 37938 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 3000K / 4000K / 5000K / 5700K / 6500K |
| CRI | : > 70 |
| IP | : IP66 |
| Mounting Type | : Auto Road / Pole / Floor |
| Housing Colour | : RAL 9005 |

Technical Drawing

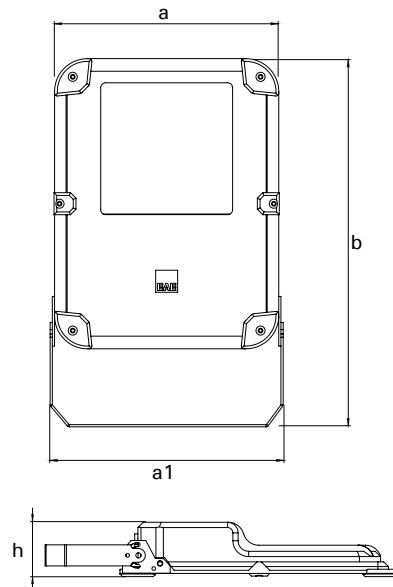

Photometric Data



Dimensions (mm)

| | a | b | h |
|------|-----|-----|----|
| 50W | 335 | 205 | 50 |
| 100W | 370 | 342 | 55 |
| 150W | 400 | 320 | 55 |
| 200W | 445 | 345 | 60 |
| 300W | 445 | 395 | 65 |

Options

| | |
|---------------|-------------------|
| Emergency Kit | : Yes (1-3 Hours) |
| Driver | : On/Off - DALI |
| CRI | : > 80 |

D-BAR



PERIMETER LANDSCAPE LUMINAIRE




“With D-BAR, which is included in the IP66 protection class, you can create an effective contour effect, especially in linear facade lighting. D-BAR cove lighting which offers easy and trouble-free installation option with IP sockets it provides a wide range of advantages by being used in decorative landscaping objects such as railings, step lighting or seating benches.”


Technical Specifications

- Housing : UV Protected Polycarbonate / Grey
- Optic : 126° UV Protected Polycarbonate
- Light Source : SMD LED
- Consumption Power: 3W / 4W / 5W / 6W / 10W / 15W
- Lumen : 155 lm / 206 lm / 258,5 lm / 310,2 lm / 517 lm / 775 lm
- Input Voltage : 220-240V AC 50/60Hz
- Color Temperature : 4000K
- CRI : > 80
- IP : IP66
- Mounting Type : Hidden Lighting
- Housing Colour : RAL 9005 / RAL 7047

Technical Drawing

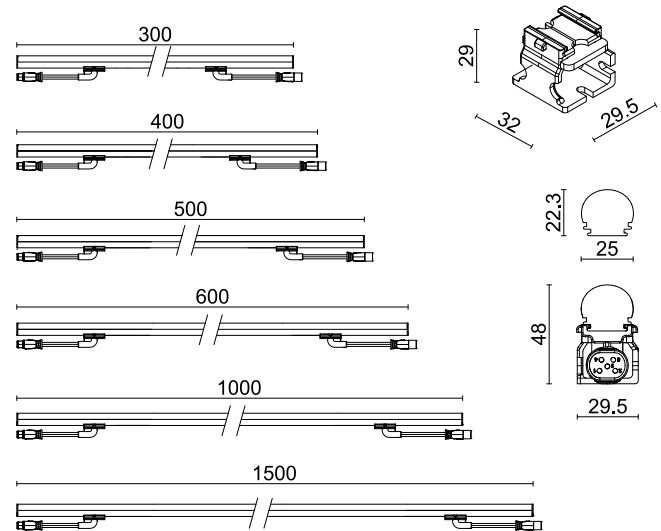

Photometric Data



Dimensions (mm)

| | a | b | h |
|------|-----|------|----|
| 300 | 295 | 300 | 48 |
| 400 | 295 | 400 | 48 |
| 500 | 295 | 500 | 48 |
| 600 | 295 | 600 | 48 |
| 1000 | 295 | 1000 | 48 |
| 1500 | 295 | 1500 | 48 |

Options

- Emergency Kit : Yes (1-3 Hours) (External)
- Driver : On/Off - DALI (External)
- CRI : > 90

Note: A maximum of 10 metres of D-BAR must be supplied from a single point in one direction with the power supply.





POLE LIGHTING LED LUMINAIRE




“PB2 PB, which appears as a pole-mounted LED luminaire, is an ideal choice for lighting landscape and urban areas with its three-arm round body design. In addition to providing full protection against dust and water splashes with IP65 protection class; it provides homogeneous lighting with its opal diffuser.”


Technical Specifications

| | |
|-------------------|-------------------------------|
| Housing | : Aluminium Injection Housing |
| Optic | : Opal Diffuser |
| Light Source | : Mid Power LED |
| Consumption Power | : 40W / 60W |
| Lumen | : 4050 lm / 6255 lm |
| Input Voltage | : 220-240V AC 50/60 Hz |
| Color Temperature | : 4000K |
| CRI | : > 80 |
| IP | : IP65 |
| Mounting Type | : Floor Mounting |
| Housing Colour | : SW 306G |

Technical Drawing

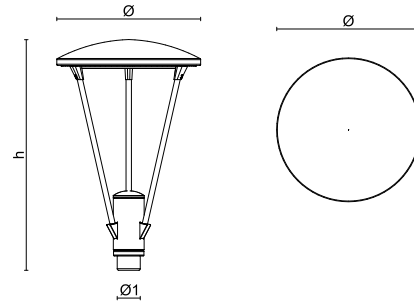

Photometric Data



Dimensions (mm)

| Ø | h | Ø1 |
|-----|-----|----|
| 470 | 895 | 76 |

Options

| | |
|--------------------|--------|
| Emergency Kit | : None |
| DALI Compatibility | : Yes |
| Dimko | : Yes |





PERIMETER LANDSCAPE LUMINAIRE



“


CENTRO, which can be integrated with different light temperatures and body colors; Impressive designs are achieved in landscape lighting by using it in places such as walkways and steps.

”


Technical Specifications

| | |
|-------------------|----------------------------------|
| Housing | : Aluminium Housing |
| Optic | : Opal Glass |
| Light Source | : SMD LED |
| Consumption Power | : 4W |
| Lumen | : 113lm |
| Input Voltage | : 220-240V AC 50/60 Hz |
| Color Temperature | : 2700K / 3000K / 4000K / 6500K |
| CRI | : >80 |
| IP | : IP65 |
| Mounting Type | : Flush Mount |
| Housing Colour | : RAL 9005 / RAL 9006 / RAL 9016 |

Technical Drawing

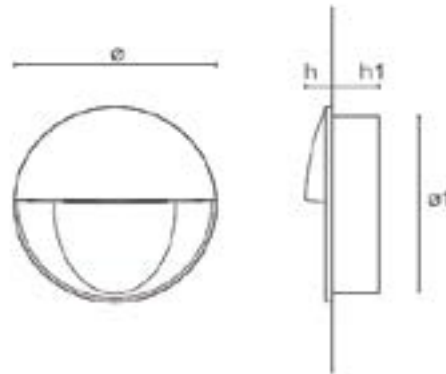

Photometric Data





Dimensions (mm)

| Ø | Ø1 | h1 | h2 |
|-----|----|----|----|
| 100 | 90 | 13 | 25 |



Options

| | |
|--------------------|-------|
| Emergency Kit | : No |
| DALI Compatibility | : Yes |







MARINE, which has an IP65 protection class, is a lighting solution that combines functionality and durability in harsh environments. With its IK09 impact resistance, it guarantees long-lasting use against external environmental factors. It includes three different light color options according to need. Thanks to its magnetic base, it can be easily mounted on metal surfaces and used as mobile lighting.


Technical Specifications

| | |
|-------------------|--|
| Housing | : Eloksal Kaplı Alüminyum Ekstrüzyon Housing |
| Optic | : Şeffaf Kapak |
| Light Source | : Mid Power LED |
| Consumption Power | : 44Wdc / 42Wac |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 3000K / 4000K / 6500K |
| CRI | : > 80 |
| IP | : IP65 |
| Mounting Type | : Surface Mounted |

Technical Drawing

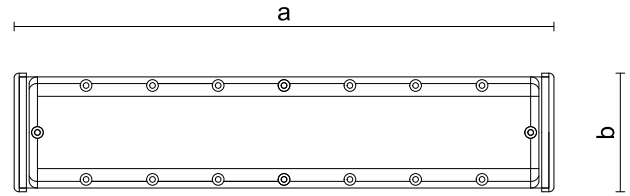

Photometric Data



Dimensions (mm)

| | b | h |
|--|-----|-------|
| | 365 | 80 83 |

Options

| | |
|--------|-----------------|
| Driver | : On/Off - DALI |
| CRI | : > 90 |





EMERGENCY LIGHTING
ARMATURES

MINOLITE STD / Pendant / Flush Mount



EMERGENCY DIRECTIONAL LED FIXTURE




“MINOLITE, which comes in three forms: surface mounted, pendant and flush mounted, is an emergency escape guidance and emergency lighting fixture. Thanks to its multifunctional structure; It is used for emergency guidance in educational institutions, shopping malls, hotels and fire exit doors.”


Technical Specifications

- Housing : White Polycarbonate Housing
- Light Source : Mid Power LED
- Consumption Power: 4 W
- Lumen : 237 lm
- Input Voltage : 220-240V AC 50/60 Hz
- Color Temperature : 6500K
- CRI : > 70
- IP : IP40
- Mounting Type : Surface Mounted / Pendant / Flush Mount
- Operation Mode : Continuous

Photometric Data



Technical Drawing

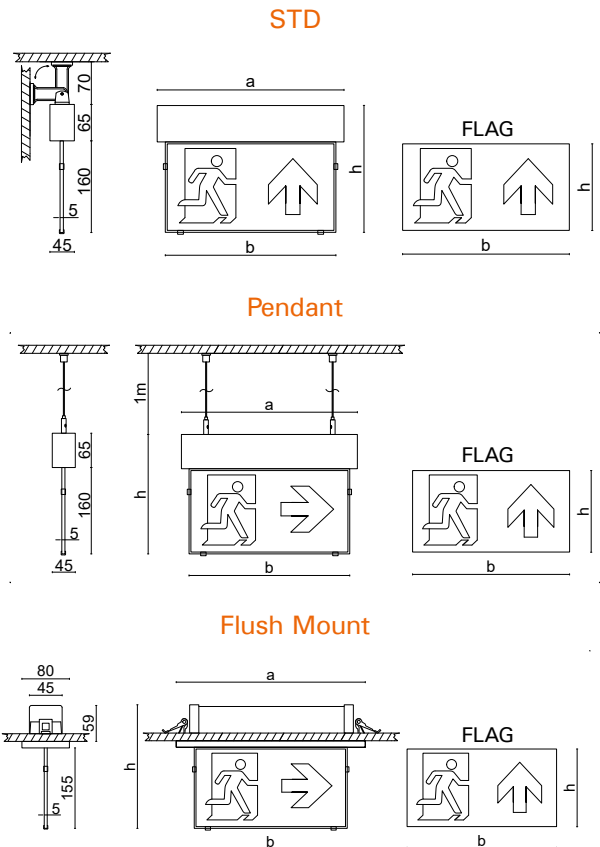

Options

- Emergency Kit : Traceable DALI Kit
- Operation Mode : In Disruption

Standard Box Contents



Dimensions (mm)

STD

| Type | a | b | h |
|----------|-----|-----|-----|
| Standard | 330 | 310 | 225 |
| Flag | | 300 | 150 |

Pendant

| Type | a | b | h |
|----------|-----|-----|-----|
| Standard | 330 | 310 | 225 |
| Flag | | 266 | 125 |

Flush Mount

| Type | a | b | h |
|----------|-----|-----|-----|
| Standard | 334 | 310 | 225 |
| Flag | | 300 | 150 |

Ceiling Cut-Out Dimensions

| |
|--------|
| 365x62 |
|--------|



EMERGENCY DIRECTIONAL LED FIXTURE




“ ELOTTI MAXI has an IP65 protection class and is suitable for use in humid areas. ELOTTI MAXI comes in two configurations; While flagless version is used for lighting in emergency situations, the version with flag can be used as an emergency escape guidance fixture. It provides excellent performance by providing illumination from 1 hour to 3 hours in case of possible power cuts. ”


Technical Specifications

| | |
|-------------------|-----------------------------|
| Housing | : PC Housing |
| Light Source | : Mid Power LED |
| Consumption Power | : 3W |
| Lumen | : 252 lm |
| Input Voltage | : 220-240V AC 50/60 Hz |
| Color Temperature | : 6500K |
| CRI | : > 70 |
| IP | : IP65 |
| Mounting Type | : Surface Mounted / Pendant |
| Operation Mode | : Continuous |

Technical Drawing



Photometric Data



Dimensions (mm)

| | a | b | h |
|----------|-----|-----|----|
| Standard | 360 | 150 | 71 |

Options

| | |
|----------------|----------------------|
| Emergency Kit | : Traceable DALI Kit |
| Operation Mode | : In Disruption |

Standard Box Contents





EMERGENCY DIRECTIONAL LED FIXTURE



“


ELLOTTI SLIM offers a multi-functional and simple solution to emergency lighting and escape lighting. The flagless version can be used for lighting in emergency situations and the version with flag can be used as an emergency escape guidance fixture.

”


Technical Specifications

| | |
|-------------------|-------------------------------|
| Housing | : White Polycarbonate Housing |
| Light Source | : Mid Power LED |
| Consumption Power | : 3W |
| Lumen | : 237 lm |
| Input Voltage | : 220-240V AC 50/60 Hz |
| Color Temperature | : 6500K |
| CRI | : > 80 |
| IP | : IP65 |
| Mounting Type | : Surface Mounted |
| Operation Mode | : Continuous |

Technical Drawing



Photometric Data




Dimensions (mm)

| | a | b | h |
|----------|-----|-----|----|
| Standard | 285 | 130 | 71 |

Options

| | |
|----------------|----------------------|
| Emergency Kit | : Traceable DALI Kit |
| Operation Mode | : In Disruption |

Standard Box Contents



EXT SLM DOUBLE FACED DIRECTIONAL SIGN

| Flag | a | b | h |
|------|-----|-----|----|
| Flag | 235 | 120 | 71 |

EMERGENCY DIRECTIONAL LED FIXTURE




The version with flag of TORSECA, which allows all kinds of ceiling applications, can be used as emergency escape guidance, while the version without flag can be used for lighting in emergency situations. With its functional structure, TORSECA is suitable for use in areas such as hospitals, educational institutions, dining halls and hotels.




Technical Specifications

| | |
|-------------------|---|
| Housing | : ABS Housing |
| Light Source | : Mid Power LED |
| Consumption Power | : 2W |
| Lumen | : 240 lm |
| Input Voltage | : 220-240V AC 50/60 Hz |
| Color Temperature | : 6500K |
| CRI | : > 70 |
| IP | : IP65 |
| Mounting Type | : Surface Mounted / Flush Mount / Pendant |
| Operation Mode | : Continuous |

Technical Drawing

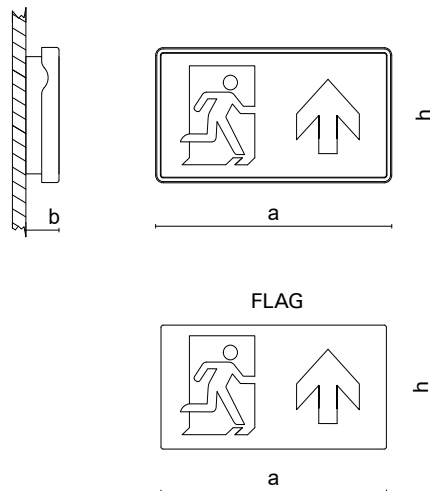

Photometric Data



Dimensions (mm)


| | a | b | h |
|----------|-----|----|-----|
| Standard | 266 | 41 | 144 |
| Flag | 245 | | 124 |

Ceiling Cutting Dimensions

| | |
|-------------|-----------|
| Flush Mount | 253 x 128 |
|-------------|-----------|

Options

| | |
|------------------|--|
| Emergency Kit | : Traceable DALI Kit |
| Mounting Options | : Surface Mounted* / Flush Mount / Pendant / Tray / Busbar** |
| Operation Mode | : In Disruption |



EMERGENCY DIRECTIONAL LED FIXTURE




PLEK is an emergency lighting and escape lighting available in three different forms: MINI, MIDI, MAXI. In addition to being able to be used by wall mounting as a single face; The ability to add optional mounting accessories to any size enables various ceiling applications.




Technical Specifications

| | |
|-------------------|-----------------------------|
| Housing | : Sheet Housing |
| Cover | : Opal Plexiglass |
| Light Source | : Mid Power LED |
| Consumption Power | : 3W |
| Lumen | : 68.8 lm |
| Input Voltage | : 220-240V AC 50/60 Hz |
| Color Temperature | : 6500K |
| CRI | : > 70 |
| IP | : IP20 |
| Mounting Type | : Surface Mounted / Pendant |
| Operation Mode | : Continuous |

Technical Drawing

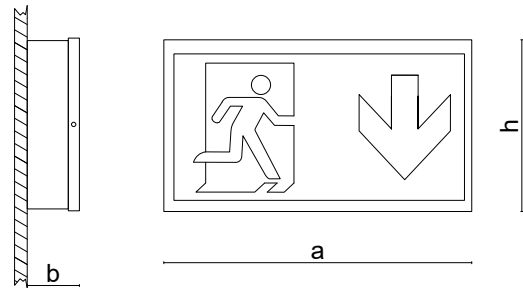

Photometric Data



Dimensions (mm)

Mini

| | a | b | h |
|----------|-----|----|-----|
| Standard | 325 | 50 | 180 |
| Flag | 315 | | 155 |

Midi

| | a | b | h |
|----------|-----|----|-----|
| Standard | 420 | 55 | 220 |
| Flag | 408 | | 208 |

Maxi

| | a | b | h |
|----------|-----|----|-----|
| Standard | 610 | 55 | 400 |
| Flag | 608 | | 398 |

Options

| | |
|--------------------|----------------------|
| Emergency Kit | : Traceable DALI Kit |
| Electronic Control | : Self / Test |
| Operation Mode | : In Disruption |



PLEK Double Faced Mini / Midi / Maxi



EMERGENCY DIRECTIONAL LED FIXTURE




PLEK is an emergency lighting and escape lighting available in three different forms as MINI, MIDI, MAXI. The ability to add mounting accessories to each size as double sided allows for a variety of ceiling applications.




Technical Specifications

| | |
|-------------------|-----------------------------|
| Housing | : Sheet Housing |
| Cover | : Opal Plexiglass |
| Light Source | : Mid Power LED |
| Consumption Power | : 3W |
| Lumen | : 68.8 lm |
| Input Voltage | : 220-240V AC 50/60Hz |
| Color Temperature | : 6500K |
| CRI | : > 70 |
| IP | : IP40 |
| Mounting Type | : Surface Mounted / Pendant |
| Operation Mode | : Continuous / Intermittent |

Technical Drawing

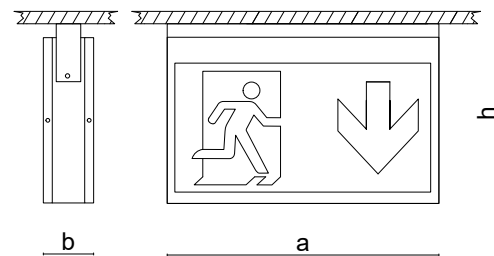

Photometric Data



Dimensions (mm)

Mini

| | a | b | h |
|----------|-----|-----|----|
| Standard | 325 | 220 | 55 |
| Flag | 315 | 155 | - |

Midi

| | a | b | h |
|----------|-----|-----|----|
| Standard | 420 | 250 | 55 |
| Flag | 408 | 208 | - |

Maxi

| | a | b | h |
|----------|-----|-----|----|
| Standard | 610 | 420 | 60 |
| Flag | 608 | 398 | - |

Options

| | |
|--------------------|----------------------|
| Emergency Kit | : Traceable DALI Kit |
| Electronic Control | : Self / Test |
| Operation Mode | : In Disruption |





EMERGENCY DIRECTIONAL LED FIXTURE




“Used as emergency and escape lighting, WALD YV has high efficiency LEDs and offers easy control to the user. In addition to having two different lens options, round and elliptical, the lenses can be easily changed where they are mounted.”


Technical Specifications

- Housing : White Polycarbonate Housing
- Light Source : Power LED
- Consumption Power: 2W
- Lumen : 150 lm
- Input Voltage : 220-240V AC 50/60 Hz
- Color Temperature : 6500K
- CRI : > 80
- IP : IP20
- Mounting Type : Flush Mount
- Operation Mode : In Disruption

Technical Drawing

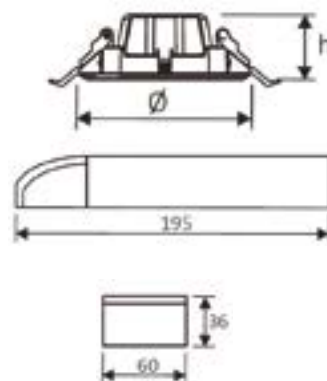

Photometric Data



Dimensions (mm)

| | Ø | h |
|----------|----|----|
| Standard | 90 | 36 |

Ceiling Cutting Dimensions

| | |
|--------------------|----|
| Cutting Dimensions | 72 |
|--------------------|----|

Options

- Emergency Kit : Traceable DALI Kit



EMERGENCY DIRECTIONAL LED FIXTURE




WALD has a wide range of uses such as shops, offices, hospitals, shopping centres and corridors and offers easy control to the user.




Technical Specifications

| | |
|-------------------|------------------------|
| Housing | : Aluminium Housing |
| Light Source | : Power LED |
| Consumption Power | : 2W |
| Lumen | : 150 lm |
| Input Voltage | : 220-240V AC 50/60 Hz |
| Color Temperature | : 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Flush Mount |
| Operation Mode | : In Disruption |

Technical Drawing

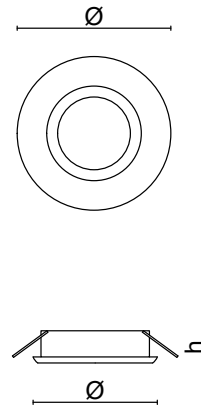

Photometric Data



Dimensions (mm)


| | Ø | h |
|----------|----|----|
| Standard | 82 | 22 |

Ceiling Cutting Dimensions

| | |
|--------------------|----|
| Cutting Dimensions | Ø |
| | 72 |

Options

Emergency Kit : Traceable DALI Kit

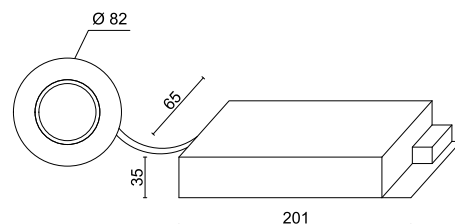



EMERGENCY DIRECTIONAL LED FIXTURE




Used as emergency and escape lighting, RIGNA has high efficiency LEDs and offers control to the user. RIGNA, which has a round lens, can also be easily replaced where it is mounted.




Technical Specifications

| | |
|-------------------|------------------------|
| Housing | : ABS Housing |
| Light Source | : Power LED |
| Consumption Power | : 2W |
| Lumen | : 160 lm |
| Input Voltage | : 220-240V AC 50/60 Hz |
| Color Temperature | : 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Flush Mount |
| Operation Mode | : In Disruption |

Technical Drawing



Photometric Data



Dimensions (mm)


| | Ø | h |
|----------|----|----|
| Standard | 82 | 40 |

Ceiling Cutting Dimensions

| | |
|--------------------|----|
| Cutting Dimensions | 76 |
|--------------------|----|

Options

Emergency Kit : Traceable DALI Kit

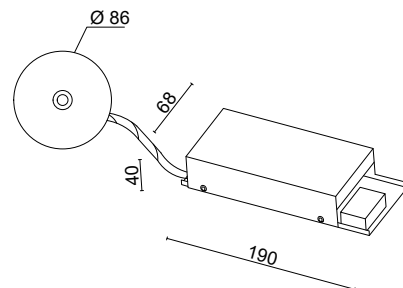



EMERGENCY DIRECTIONAL LED FIXTURE




“STOLE YV, which has advanced LED technology, offers easy control to the user. Thanks to its recessed mounted design, it saves space in the area where it is used. It has a wide range of usage areas such as stores, offices, hospitals, shopping centres or corridors by providing safe lighting from 1 hour to 3 hours in case of possible interruption.”


Technical Specifications

| | |
|-------------------|-------------------------------|
| Housing | : White Polycarbonate Housing |
| Light Source | : Power LED |
| Consumption Power | : 2W |
| Lumen | : 150 lm |
| Input Voltage | : 220-240V AC 50/60 Hz |
| Color Temperature | : 6500K |
| CRI | : > 80 |
| IP | : IP20 |
| Mounting Type | : Surface Mounted |
| Operation Mode | : In Disruption |

Technical Drawing

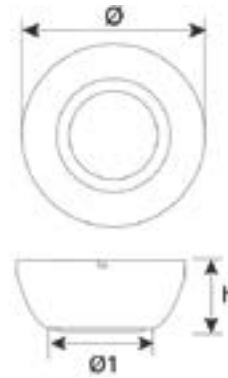

Photometric Data



Dimensions (mm)

| | Ø | Ø1 | h |
|----------|-----|----|----|
| Standard | 140 | 90 | 75 |

ARIOSTE Emergency Lighting



EMERGENCY DIRECTIONAL LED FIXTURE




“ARIOSTE, which is mostly preferred in car parks and factories for emergency lighting and escape lighting, can be used reliably in humid volumes with IP65 protection class. In addition to providing illumination from 1 hour to 3 hours in possible power cut situations; ARIOSTE, which has a steerable body, can be directed to the desired location as needed.”


Technical Specifications

| | |
|-------------------|-------------------------|
| Housing | : Thermoplastic Housing |
| Light Source | : Mid Power LED |
| Consumption Power | : 5.5W |
| Lumen | : 2 x 750 lm |
| Input Voltage | : 220-240V AC 50/60 Hz |
| Color Temperature | : 6500K |
| CRI | : > 80 |
| IP | : IP65 |
| Mounting Type | : Flush Mount |
| Operation Mode | : In Disruption |

Technical Drawing

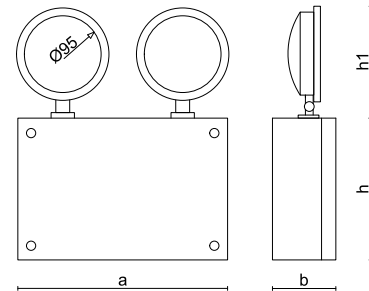

Photometric Data



Dimensions (mm)

| a | b | h | h1 |
|-----|----|-----|-----|
| 255 | 98 | 200 | 150 |

Options

| | |
|--------------------|----------------------|
| Emergency Kit | : Traceable DALI Kit |
| Electronic Control | : Self / Test |



EMERGENCY DIRECTIONAL LED FIXTURE




PONDA stands out as emergency lighting especially in factories and car parks with its durable metal body. In addition to being able to provide lighting from 1 hour to 3 hours; it provides protection against dust particles with IP40 protection class. PONDA, which has a steerable body, can be directed to the desired direction as needed.


Technical Specifications

| | |
|-------------------|---|
| Housing | : Electrostatic Painted DKP Metal Housing |
| Light Source | : Mid Power LED |
| Consumption Power | : 2 x 9W |
| Lumen | : 2 x 830 lm |
| Input Voltage | : 220-240V AC 50/60 Hz |
| Color Temperature | : 6500K |
| CRI | : > 80 |
| IP | : IP40 |
| Mounting Type | : Surface Mounted |
| Operation Mode | : In Disruption |

Technical Drawing

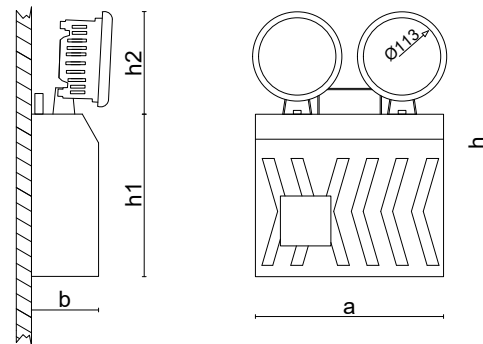

Photometric Data



Dimensions (mm)

| a | b | h | h1 | h2 |
|-----|----|-----|-----|-----|
| 215 | 90 | 330 | 190 | 140 |

Options

| | |
|--------------------|----------------------|
| Emergency Kit | : Traceable DALI Kit |
| Electronic Control | : Self / Test |

EXIT ROBITO NG Surface Mounted / Pendant / Flush Mount



EMERGENCY DIRECTIONAL LED FIXTURE




“Equipped with advanced LED technology, EXIT ROBITO NG shows excellent performance in possible situations with low energy consumption. In addition to being used in a wide range of areas from fire exits to emergency evacuation routes; it also offers easy installation on any surface with its three different mounting types.”


Technical Specifications

| | |
|-------------------|-------------------------|
| Housing | : ABS Extrusion Housing |
| Light Source | : Mid Power LED |
| Consumption Power | : 2W |
| Lumen | : 90 lm |
| Input Voltage | : 220-240V AC 50/60 Hz |
| Color Temperature | : 6500K |
| CRI | : > 70 |
| IP | : IP20 |
| Mounting Type | : Surface Mounted |
| Operation Mode | : Continuous |

Technical Drawing

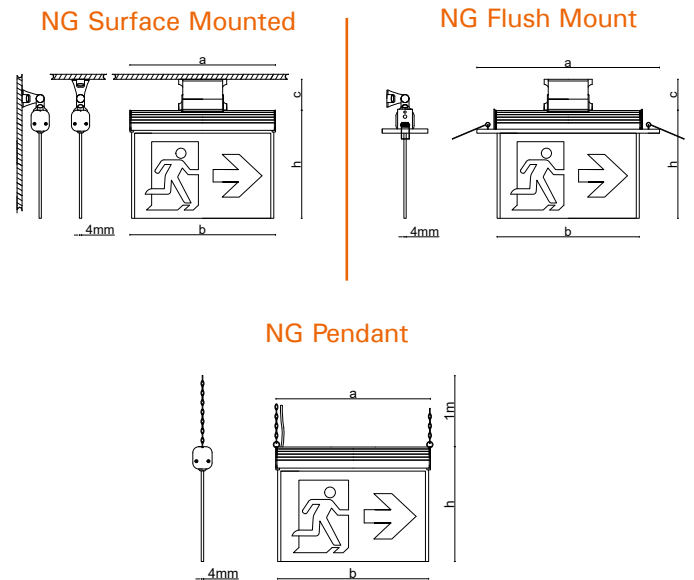

Photometric Data



Options

Operation Mode : In Disruption

Dimensions (mm)

Surface Mounted

| | a | h | b | c |
|----------|-----|-----|-----|----|
| Standard | 258 | 190 | 250 | 55 |
| Flag | 240 | 150 | | |

Pendant

| | a | h | b |
|----------|-----|-----|-----|
| Standard | 258 | 190 | 250 |
| Flag | 240 | 150 | |

Flush Mount

| | a | h | b | c |
|----------|-----|-----|-----|----|
| Standard | 320 | 190 | 250 | 55 |
| Flag | 240 | 150 | | |



P91 P92 P93 P94 P95 P96 P97 P98 P99 P01

EXIT ROBITO

Surface Mounted / Pendant / Flush Mount



EMERGENCY DIRECTIONAL LED FIXTURE




“EXIT ROBITO, which has aluminum extrusion housing, offers a versatile solution for emergency lighting and escape lighting without compromising its durability; It makes it possible to illuminate from 1 hour to 3 hours in possible power cut situations. EXIT ROBITO, which can be used with the optional DALI traceable kit option, provides convenience to the user.”

Technical Specifications


| | |
|-------------------|-------------------------|
| Housing | : ABS Extrusion Housing |
| Light Source | : Mid Power LED |
| Consumption Power | : 2W |
| Lumen | : 90 lm |
| Input Voltage | : 220-240V AC 50/60 Hz |
| Color Temperature | : 6500K |
| CRI | : > 70 |
| IP | : IP20 |
| Mounting Type | : Surface Mounted |
| Operation Mode | : Continuous |

Technical Drawing


Surface Mounted




Flush Mount



Pendant



Photometric Data



Dimensions (mm)

Surface Mounted

| | a | h | b | c |
|----------|-----|-----|-----|----|
| Standard | 305 | 205 | 300 | 50 |
| Flag | | 150 | 290 | |

Pendant

| | a | h | b |
|----------|-----|-----|-----|
| Standard | 305 | 205 | 300 |
| Flag | | 150 | 290 |

Flush Mount

| | a | h | b | c |
|----------|-----|-----|-----|----|
| Standard | 380 | 205 | 300 | 50 |
| Flag | | 150 | 290 | |

Options

| | |
|----------------|----------------------|
| Emergency Kit | : Traceable DALI Kit |
| Operation Mode | : In Disruption |



P91 P92 P93 P94 P95 P96 P97 P98 P99 P01

ARCHITECTURAL SOLUTIONS

EAE has the right to make any appropriate changes it deems necessary without prior notice.
Please Contact to obtain more information on the products and details included in the catalog.

Technical specifications have a tolerance of $\pm 5\%$.

Please visit our website in the following address for the latest information.
www.eaelighting.com



EAE LIGHTING INC.
İkitelli OSB Mah. Eski Turgut Özal Cad.
EAE No: 20, İç Kapı No: Giriş Kat
Başakşehir / İSTANBUL - TÜRKİYE
Tel : +90 212 413 21 00 (pbx)
Faks : +90 212 549 37 90
www.eaelighting.com



EAE LIGHTING - ARCHITECTURAL SOLUTIONS CATALOGUE - Update Date: 26.04.2024
EAE Lighting is provided with the right to perform changes deemed necessary without notifying in advance.
Please contact us for further information about products and details partaking in catalogue.

engineering the light