




LOGY

Multilens high bay luminaires



Log y

L u m i n a i r e S e r i e s

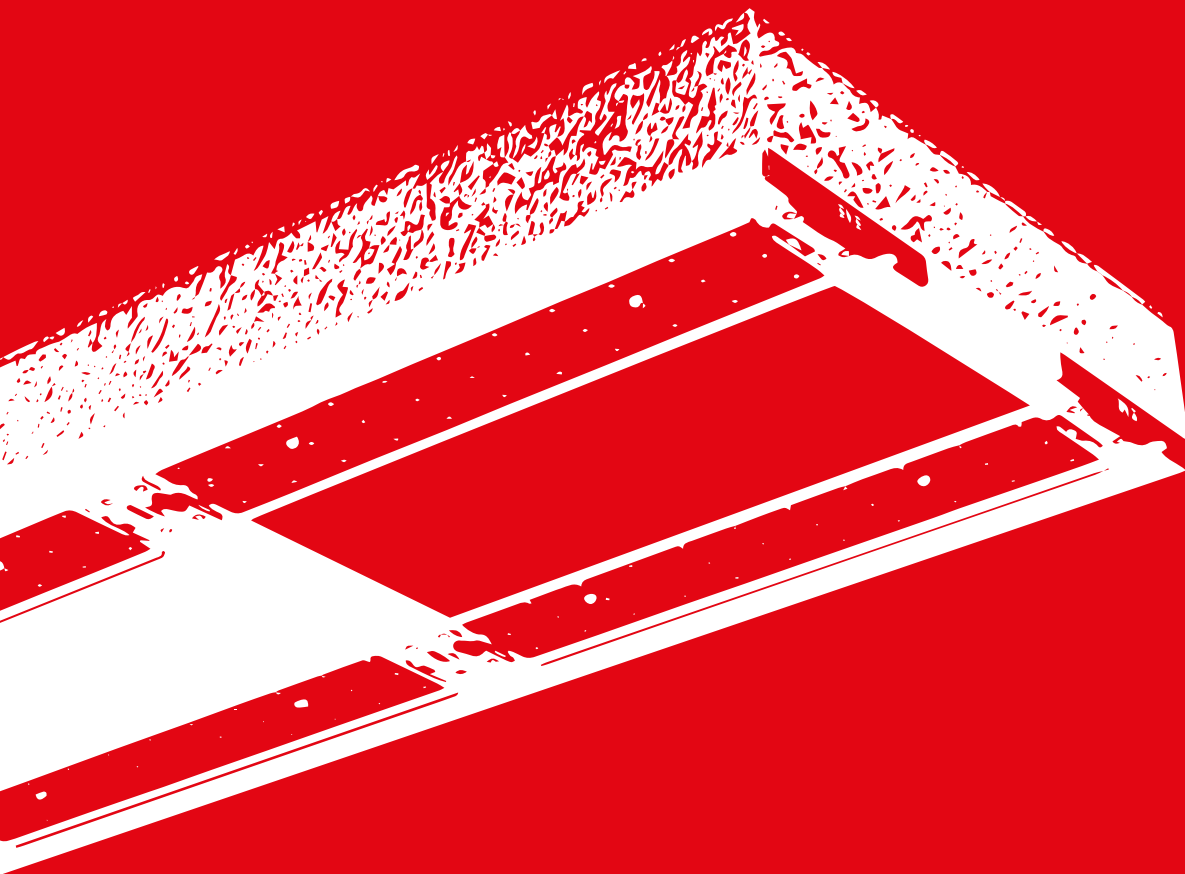

LOGY IP65 Raf (45°)	5
LOGY IP65 Arena (60°)	6
LOGY IP65 Lowbay (90°)	8
LOGY IP20 Raf (30°)	10
LOGY IP20 Lowbay (60°)	11
LOGY IP20 Lowbay (90°)	12

LOGY

Multilens high bay luminaires


HIGH BAY LED LUMINAIRES



The initial design of LOGY IP20 high ceiling fixture had been used extensively in logistics warehouses. Now with its IP65 housing structure and 3 different optics selections, it has become the ideal solution for all high ceiling applications. Our Logy fixture, which successfully passed the temperature tests, provides the advantage of cost-effectiveness with its sheet metal casing structure.

It provides high energy saving and a short period of redemption for the business investment by bringing in maximum lighting comfort with minimum costs thanks to its specially designed suspension detail and optical solutions for logistics warehouses.

IP65

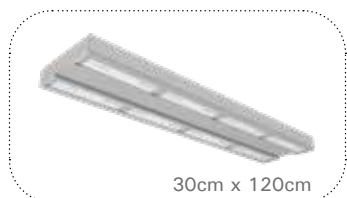

30cm x 120cm




30cm x 90cm




30cm x 60cm


IP20



30cm x 120cm



30cm x 90cm




30cm x 60cm



LOGY IP65

RAF

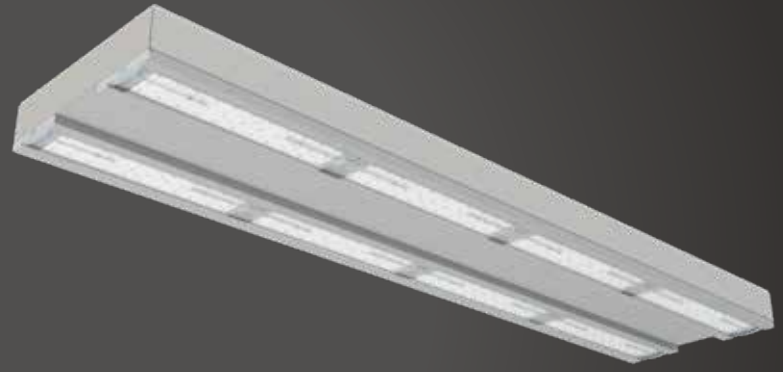

INDUSTRY LIGHTING LED LUMINAIRES




A multiled linear product, the LOGY IP65 can meet the variable lighting needs of all high ceiling applications that do not require high IP protection with modular led and lens infrastructure. It features a range of LOGY, housing color and Optical options for multi-function operation.




Technical Specifications

Housing	: Metal sheet housing
Optical	: Lens
Light Source	: Mid Power LED
Power	: 72 W, 100 W, 122 W, 115 W, 128 W, 188 W, 204 W
Lumen	: 9000lm, 11992lm, 1336lm, 14275lm, 15711lm, 20550lm, 23845lm
Input Voltage	: 220-240V AC 50/60 Hz
Color Temp.	: 3000K / 4000K / 5700K
CRI	: > 80
IP	: IP65
Installation	: Surface mounted
Housing colour	: SW6964

Technical Drawing

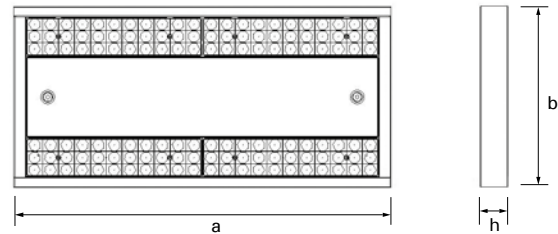

Photometric Curve

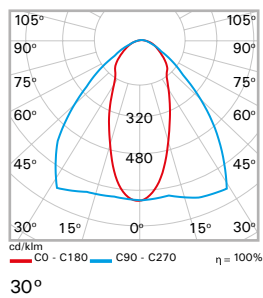

Dimensions (mm)

Type	a	b	h
72 W	655	300	70
100 W	655	300	70
115 W	975	300	70
122 W	655	300	70
128 W	975	300	70
188 W	975	300	70
205 W	1295	300	70

Options

Emergency Kit	: Yes (1-3 hours)
DALI Compatibility	: Yes


Purchase Order Table

Product Type	Product Code	Power (W)	Weight (kg)
72 W 4000K	LOJ 072U 400A00 XL 9K00 45 306065	71,5	7
100 W 4000K	LOJ 100U 400A00 XL 11K9 45 306065	100	7
122 W 4000K	LOJ 122U 400A00 XL 14K3 45 306065	124	7
115 W 4000K	LOJ 115U 400A00 XL 14K2 45 309065	115	10
128 W 4000K	LOJ 128U 400A00 XL 15K7 45 309065	128	10
188 W 4000K	LOJ 188U 400A00 XL 20K5 45 309065	188	10
204 W 4000K	LOJ 204U 400A00 XL 23K8 45 301265	204	13,4

LOGY IP65

ARENA

INDUSTRY LIGHTING LED LUMINAIRES

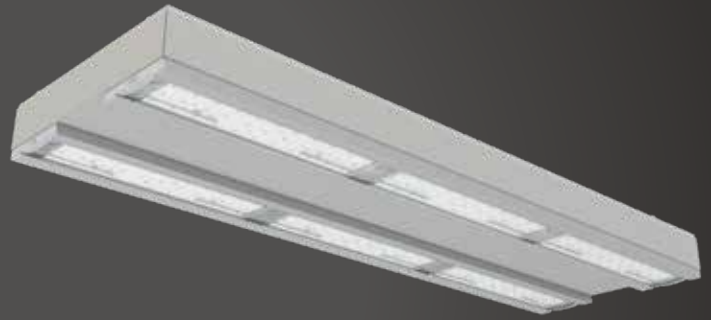


A multiled linear product, the LOGY IP65 can meet the variable lighting needs of all high ceiling applications that do not require high IP protection with modular led and lens infrastructure. It features a range of LOGY, housing color and Optical options for multi-function operation.




Technical Specifications

Housing	: Metal sheet housing
Optical	: 60° lens
Light Source	: Mid Power LED
Power	: 72 W / 100 W / 115 W / 122 W / 128 W / 197 W / 204 W
Lumen	: 8970lm, 11780lm, 14062lm, 14150lm, 15557lm, 21000lm, 23319lm
Input Voltage	: 220-240V AC 50/60 Hz
Color Temp.	: 3000K / 4000K / 5700K
CRI	: > 80
IP	: IP65
Installation	: Surface mounted
Housing colour	: SW6964

Technical Drawing

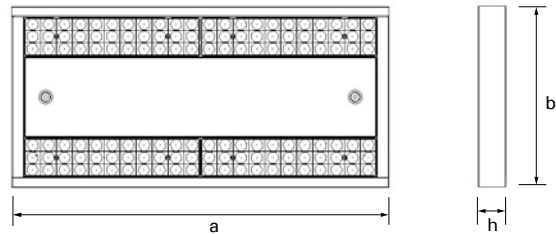

Photometric Curve

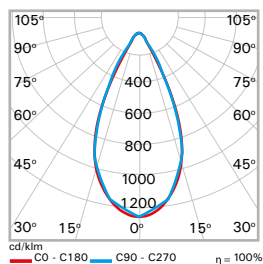

Dimensions (mm)

Type	a	b	h
72 W	655	300	70
100 W	655	300	70
122 W	1295	300	70
115 W	975	300	70
128 W	975	300	70
197 W	975	300	70
204 W	1295	300	70

Options

Emergency Kit	: Yes (1-3 hours)
DALI Compatibility	: Yes

Purchase Order Table


Product Type	Product Code	Power (W)	Weight(kg)
72 W 4000K	LOJ 072U 400A00 AR 8K96 60 306065	71,7	7
100 W 4000K	LOJ 100U 400A00 AR 11K7 60 306065	100	7
122 W 4000K	LOJ 122U 400A00 AR 14K1 60 306065	122,9	7
115 W 4000K	LOJ 115U 400A00 AR 14K0 60 309065	115	10
128 W 4000K	LOJ 128U 400A00 AR 15K5 60 309065	128	10
197 W 4000K	LOJ 197U 400A00 AR 21K0 60 309065	197	10
204 W 4000K	LOJ 204U 400A00 AR 23K3 60 301265	204	13,4

LOGY IP65

LOWBAY



INDUSTRY LIGHTING LED LUMINAIRES




A multiled linear product, the LOGY IP65 can meet the variable lighting needs of all high ceiling applications that do not require high IP protection with modular led and lens infrastructure. It features a range of LOGY, housing color and Optical options for multi-function operation.




Technical Specifications

Housing	: Metal sheet housing
Optical	: Lens
Light Source	: Mid Power LED
Power	: 72 W, 100 W, 122 W, 115 W, 128 W, 188 W, 204 W
Lumen	: 8865lm, 11328lm, 13981lm, 1816lm, 15420lm, 19933lm, 22760 lm
Input Voltage	: 220-240V AC 50/60 Hz
Color Temp.	: 3000K / 4000K / 5700K
CRI	: > 80
IP	: IP65
Installation	: Surface mounted
Housing colour	: SW6964

Technical Drawing

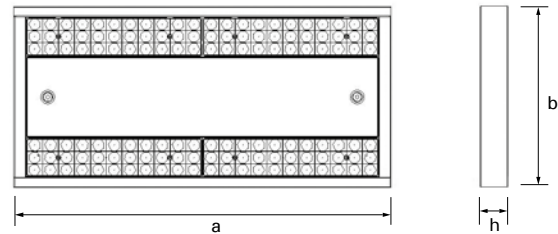

Photometric Curve

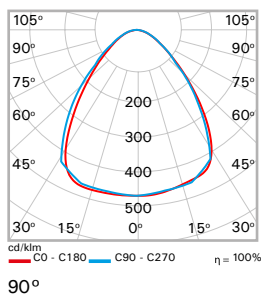

Dimensions (mm)

Type	a	b	h
71 W	655	300	70
97 W	655	300	70
122 W	655	300	70
115 W	975	300	70
128 W	975	300	70
188 W	975	300	70
204 W	1295	300	70

Options

Emergency Kit	: Yes (1-3 hours)
DALI Compatibility	: Yes

Purchase Order Table

Product Type	Product Code	Power (W)	Weight(kg)
72 W 4000K	LOJ 072U 400A00 LB 8K86 90 306065	72	7
100 W 4000K	LOJ 100U 400A00 LB 11K3 90 306065	97.4	7
122 W 4000K	LOJ 122U 400A00 LB 13K9 90 306065	122.3	7
115 W 4000K	LOJ 115U 400A00 LB 13K8 90 309065	114.5	10
128 W 4000K	LOJ 128U 400A00 LB 15K4 90 309065	128.6	10
188 W 4000K	LOJ 188U 400A00 LB 19K9 90 309065	188.7	10
204 W 4000K	LOJ 204U 400A00 LB 22K7 90 301265	202	13,4



LOGY IP20

RAF



INDUSTRY LIGHTING LED LUMINAIRES




A multiled linear product, the LOGY IP20 can meet the variable lighting needs of all high ceiling applications that do not require high IP protection with modular led and lens infrastructure. It features a range of LOGY, housing color and Optical options for multi-function operation.




Technical Specifications

Housing	: Metal sheet housing
Optical	: 45° lens
Light Source	: Mid Power LED
Power	: 72 W / 95 W / 128 W / 115 W / 133 W / 191 W 130 W / 204 W / 188 W / 228 W
Lumen	: 12745 lm / 16137 lm / 18273 lm / 24066 lm / 17061 lm 26906 lm / 26346 lm / 31350 lm
Input Voltage	: 220-240V AC 50/60 Hz
Color Temp.	: 3000K / 4000K / 5700K
CRI	: > 80
IP	: IP20
Installation	: Surface mounted
Housing colour	: SW6964

Technical Drawing

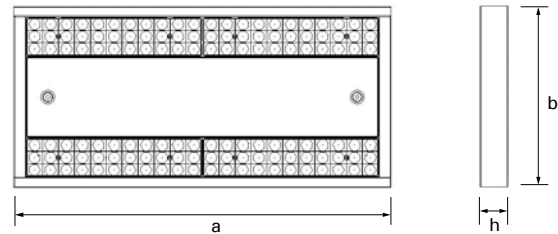

Photometric Curve

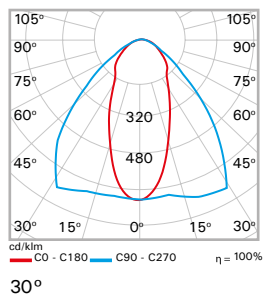

Dimensions (mm)

Type	a	b	h
72 W	615	295	45
95 W	655	300	70
115 W	904	295	45
128 W	615	195	45
133 W	904	295	45
188 W	904	595	45
191 W	904	295	45
204 W	1192	295	45
228 W	1192	595	45

Options

Emergency Kit	: Yes (1-3 hours)
DALI Compatibility	: Yes

Purchase Order Table


Product Type	Product Code	Power (W)	Weight (kg)
72 W 4000K	LOJ 072U 400A00 XL 10K0 45 306020	72	4
95 W 4000K	LOJ 095U 400A00 XL 12K7 45 306020	95,1	4
128 W 4000K	LOJ 128U 400A00 XL 15K6 45 306020	127,1	8
115 W 4000K	LOJ 115U 400A00 XL 15K8 45 309020	115	6
133 W 4000K	LOJ 133U 400A00 XL 18K2 45 309020	131,6	13,1
191 W 4000K	LOJ 191U 400A00 XL 24K0 45 309020	190,6	6
130 W 4000K	LOJ 130U 400A00 XL 17K0 45 301220	131,2	8
204 W 4000K	LOJ 204U 400A00 XL 26K9 45 301220	203,7	13,1
188 W 4000K	LOJ 188U 400A00 XL 26K3 45 601220	188	13,1
228 W 4000K	LOJ 228U 400A00 XL 31K3 45 601220	228	13,1





LOGY IP20 LOWBAY

INDUSTRY LIGHTING LED LUMINAIRES

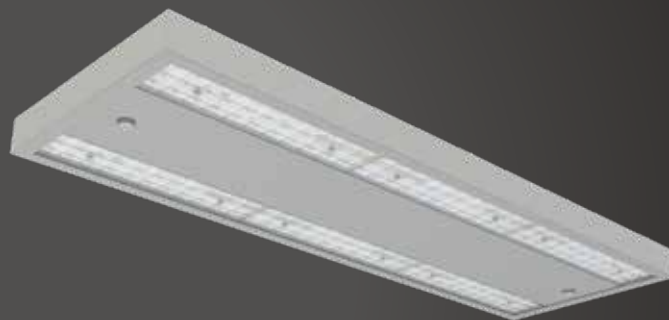


A multiled linear product, the LOGY IP20 can meet the variable lighting needs of all high ceiling applications that do not require high IP protection with modular led and lens infrastructure. It features a range of LOGY, housing color and Optical options for multi-function operation.




Technical Specifications

Housing	: Metal sheet housing
Optical	: 90° lens
Light Source	: Mid Power LED
Power	: 72 W / 95 W / 128 W / 133 W / 191 W / 204 W / 188 W / 228 W
Lumen	: 12470 lm / 15763 lm / 17856 lm / 23748 lm / 26345 lm / 26170 lm / 30936 lm
Input Voltage	: 220-240V AC 50/60 Hz
Color Temp.	: 3000K / 4000K / 5700K
CRI	: > 80
IP	: IP20
Installation	: Surface mounted
Housing colour	: SW6964

Technical Drawing

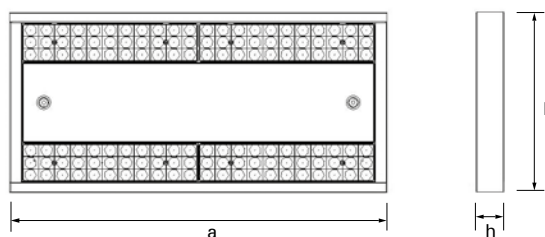

Photometric Curve

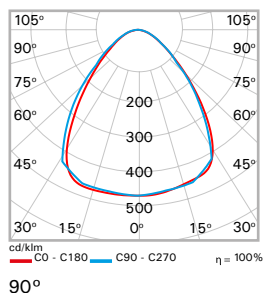

Dimensions (mm)

Type	a	b	h
72 W	615	295	45
95 W	665	300	70
128 W	615	295	45
133 W	904	295	45
191 W	904	295	45
204 W	1192	295	45
118 W	1192	595	45
228 W	1192	295	45


Options

Emergency Kit	: Yes (1-3 hours)
DALI Compatibility	: Yes

Purchase Order Table

Product Type	Product Code	Power (W)	Weight (kg)
72 W 4000K	LOJ 072U 400A00 LB 10K0 90 306020	72	4
95 W 4000K	LOJ 095U 400A00 LB 12K4 90 306020	94,9	7
128 W 4000K	LOJ 128U 400A00 LB 15K7 90 306020	126,9	8
133 W 4000K	LOJ 133U 400A00 LB 17K8 90 309020	133,6	4
191 W 4000K	LOJ 191U 400A00 LB 23K7 90 309020	190,6	6
204 W 4000K	LOJ 204U 400A00 LB 26K3 90 301220	203,6	8
188 W 4000K	LOJ 188U 400A00 LB 26K1 90 601220	188	13,1
228 W 4000K	LOJ 228U 400A00 LB 30K9 90 601220	227,7	13,1



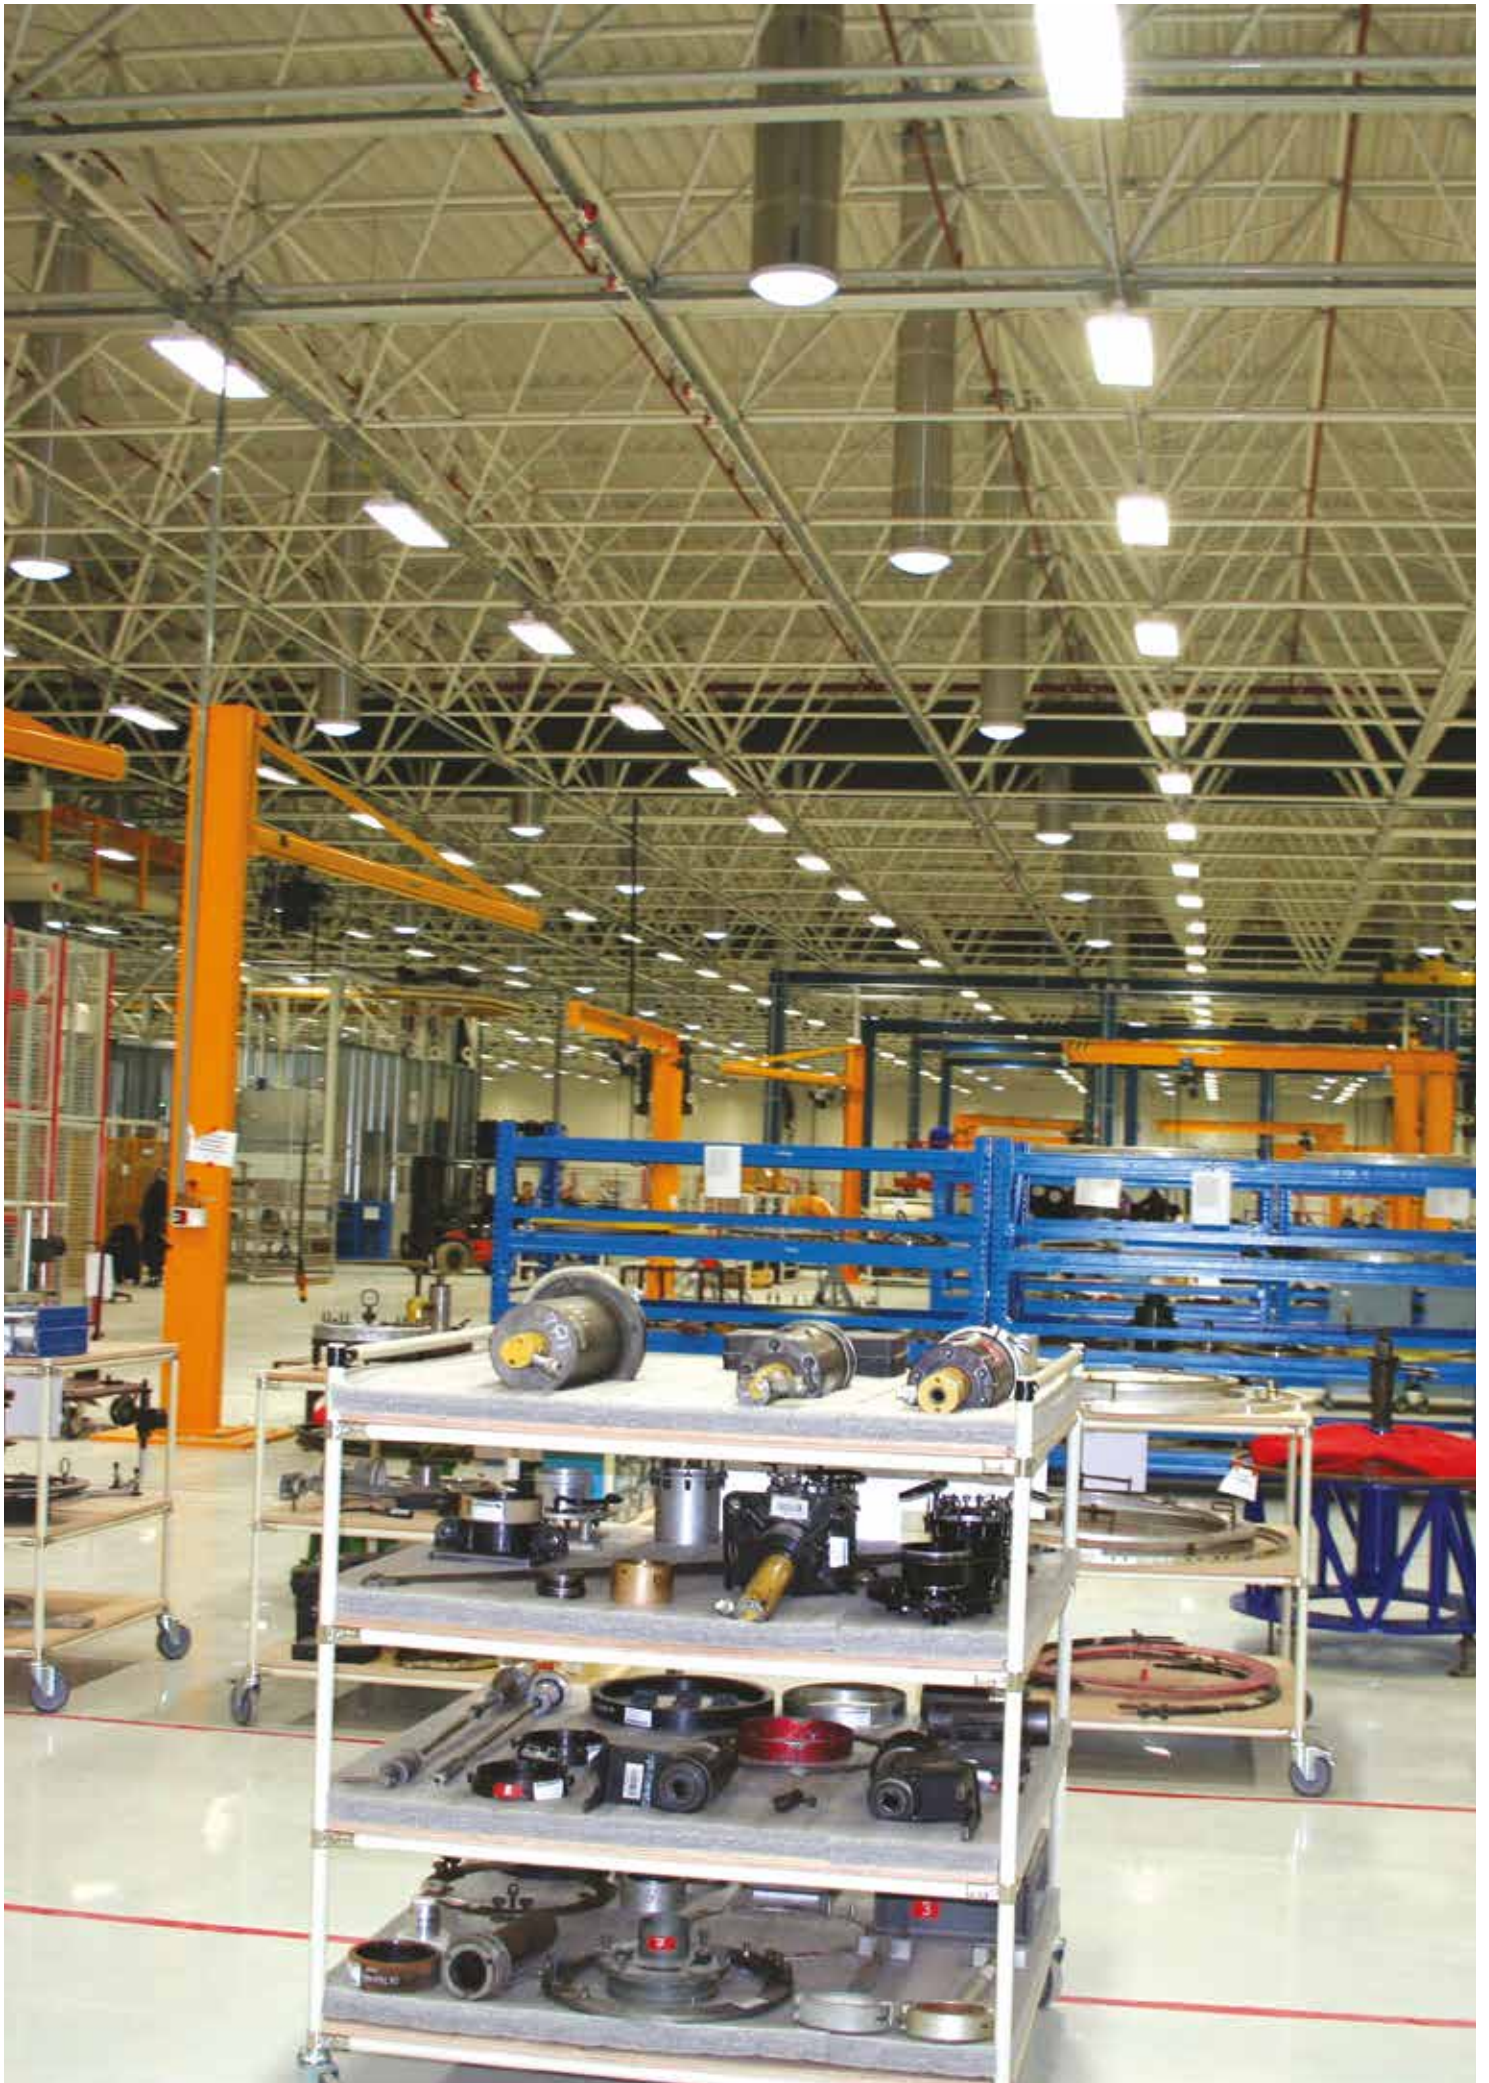

LOGY IP20

ARENA



INDUSTRY LIGHTING LED LUMINAIRES




A multiled linear product, the LOGY IP20 can meet the variable lighting needs of all high ceiling applications that do not require high IP protection with modular led and lens infrastructure. It features a range of LOGY, housing color and Optical options for multi-function operation.




Technical Specifications

Housing	: Metal sheet housing
Optical	: 45° lens
Light Source	: Mid Power LED
Power	: 30x60 : 72W - 95W - 128W / 30x90 : 133W - 191W - 115W / 30x120: 130W - 204W / 60x120: 188W - 228W
Lumen	: 30x60 : 10171 lm - 12800 lm - 16288 lm / 30x90 : 17990 lm - 23815 lm - 16088 lm / 30x120 : 16732 lm - 26478 lm / 60x120 : 26635 lm - 31761 lm
Input Voltage	: 220-240V AC 50/60 Hz
Color Temp.	: 3000K / 4000K / 5700K
CRI	: > 80
IP	: IP20
Installation	: Surface mounted
Housing colour	: SW6964

Technical Drawing

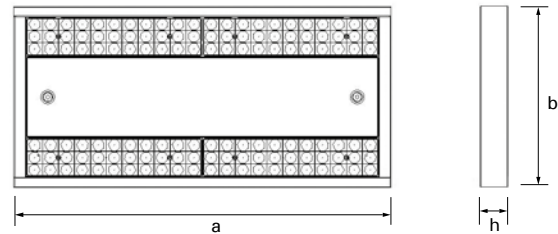

Photometric Curve

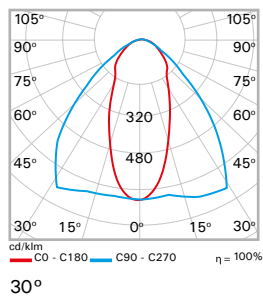

Dimensions (mm)

Type	a	b	h
72 W	615	295	45
95 W	665	300	70
128 W	615	295	45
133 W	904	295	45
191 W	904	295	45
204 W	1192	295	45
118 W	1192	595	45
228 W	1192	295	45

Options

Emergency Kit	: Yes (1-3 hours)
DALI Compatibility	: Yes

Purchase Order Table

Product Type	Product Code	Power (W)	Weight (kg)
72 W 4000K	LOJ 072U 400A00 AR 10K0 60 306020	72	4
95 W 4000K	LOJ 095U 400A00 AR 12K7 60 306020	95,1	4
128 W 4000K	LOJ 128U 400A00 AR 16K2 60 306020	127,1	8
115 W 4000K	LOJ 115U 400A00 AR 15K8 60 309020	115	6
133 W 4000K	LOJ 133U 400A00 AR 18K0 60 309020	131,6	13,1
191 W 4000K	LOJ 191U 400A00 AR 23K8 60 309020	190,6	6
130 W 4000K	LOJ 130U 400A00 AR 16K7 60 301220	131,2	8
204 W 4000K	LOJ 204U 400A00 AR 26K8 60 301220	203,7	13,1
188 W 4000K	LOJ 188U 400A00 AR 26K6 60 601220	188	13,1
228 W 4000K	LOJ 228U 400A00 AR 31K7 60 601220	228	13,1







LOGY

Multilens high bay luminaires

EAE LIGHTING-Brochure LOGY - ENG - Uptade Date: 30.06.2022
EAE. is provided with the right to perform changes deemed necessary without notifying in advance.
Please contact us for further information about products and details partaking in catalogue.



EAE LIGHTING Inc.
Ikitelli Organize Sanayi Bolgesi
Eski Turgut Ozal Caddesi No:20
Basaksehir / ISTANBUL - TURKEY
Tel : +90 212 413 21 00 (pbx)
Fax : +90 212 549 37 90
www.eaelighting.com



/eae group

/eae group

/eae group

/eae corporate

/eae group

/eae group

engineering the light